



iclever IC-BK08 Tri Folding Wireless Keyboard with Touchpad User Manual

[Home](#) » [iclever](#) » iclever IC-BK08 Tri Folding Wireless Keyboard with Touchpad User Manual 

Contents

- 1 [iclever IC-BK08 Tri Folding Wireless Keyboard with Touchpad User Manual](#)
- 2 [Package contents](#)
- 3 [Bluetooth Keyboard Features](#)
- 4 [Indicator LED Light Analysis](#)
- 5 [Bluetooth Keyboard Pairing](#)
- 6 [Keys and Functions](#)
- 7 [Fn Lock Key.](#)
- 8 [SPECIAL NOTE](#)
- 9 [How to switch keyboard language](#)
- 10 [Touchpad Function Analysis](#)
- 11 [Balance Stand Opening Steps](#)
- 12 [Power Saving Mode](#)
- 13 [Caution](#)
- 14 [Specification](#)
- 15 [Read More About This Manual & Download PDF:](#)
- 16 [Documents / Resources](#)
 - 16.1 [References](#)
- 17 [Related Posts](#)

iclever IC-BK08 Tri Folding Wireless Keyboard with Touchpad User Manual




Package contents

1. Foldable Aluminium Bluetooth Keyboard
2. User Manual
3. USB Charging Cable
4. Carrying Bag
5. Warranty Card

Bluetooth Keyboard Features

1. Built-in USA BROADCOM Bluetooth module 3.0.
2. Suitable for Android& Windows& iOS systems tablets, smartphones etc.
3. With multi – point touchpad function.
4. Magnetic power on/off design,easy and flexible to operate.
5. Tri-fold design,convenient to carry.
6. Can pair with 3 Bluetooth devices simultaneously ,easy to change among them.
7. MICRO interface,easy to charge.
8. Built-in rechargeable lithium battery.
9. Light weight, quiet keystrokes.
10. Energy saving keyboard with sleep mode.
11. Front:Plastic. Back:Aluminum alloy.

Indicator LED Light Analysis

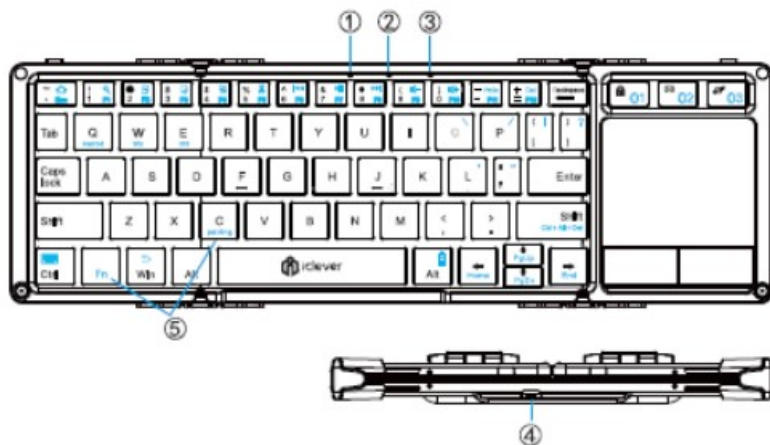

- Power Indicator ①②③: All 3 indicators light up in blue color for 3s.
- Charging Indicator ①: It lights up in red color when the keyboard is charging and turns off once fully charged.
- Low Battery Indicator ①②③: All 3 indicators flash in red when it is time to recharge.
- Bluetooth Indicator ①②③: ① / ② / ③ indicator flashes in blue color when the first / second / third device is waiting for pairing and lights up blue sturdily after it has been paired successfully.
- Micro Charging Port ④: Used for charging the keyboard.
- Pairing Keys ⑤: After ⑤ combination keys being pressed together, ① / ② / ③ indicator flashes in blue color and slowly flashes 3 times for reconnecting.

Bluetooth Keyboard Pairing

Step 1. Power the keyboard on by unfolding it, light flash blue quickly and and turn blue.

Step 2. Search for Bluetooth devices on your tablet or smartphone. Refer to its user manual if needed.

Step 3. Find the Bluetooth name “iClever IC-BK08 Keyboard” and click for connection.
















Step 4. The corresponding Bluetooth indicator lights up blue constantly after successfully paired.



Step 5. To pair with 2nd device, press Fn+ key. LED flash quickly blue. Follow step 2.3.4 to finish pairing.











Step 6. To pair with 3rd device, press Fn+ key. LED flash quickly blue. Follow step 2.3.4 to finish pairing.

Keys and Functions

To use the shortcut keys, hold the “Fn” key while pressing the desired shortcut key on the Android or iOS tablets. For the Windows tablets, press and hold the “Fn” + “Shift” keys while pressing the desired function keys.

	Fn on Android	Fn on Windows	Fn+Shift on Windows	Fn on iOS
	Home	Esc	Web browser	Home
	Search for	F1	Search for	Search for
	Select all	F2	Select all	Select all
	Copy	F3	Copy	Copy
	Paste	F4	Paste	Paste
	Cut	F5	Cut	Cut
	Previous track	F6	Previous track	Previous track
	Play/pause	F7	Play/pause	Play/pause
	Next track	F8	Next track	Next track
	Volume down	F9	Volume down	Volume down
	Volume up	F10	Volume up	Volume up
	N/A	Screen shot	N/A	N/A
	N/A	N/A	N/A	Keyboard display
	Back	N/A	N/A	N/A
	Power Display	Power Display	N/A	Power Display
Ctrl+Alt+Del	N/A	Start task manager	N/A	N/A

FN+	iOS function	Android function	Windows function
	Pairing	Pairing	Pairing
	Bluetooth channel 1	Bluetooth channel 1	Bluetooth channel 1

	Bluetooth channel 2	Bluetooth channel 2	Bluetooth channel 2
	Bluetooth channel 3	Bluetooth channel 3	Bluetooth channel 3
	Power Display	Power Display	Power Display
	Head of line (N/A in iOS 10)	Head of line	Head of line
	End of line (N/A in iOS 10)	End of line	End of line
	Previous page (N/A in iOS 10)	Previous page	Previous page
	Next page (N/A in iOS 10)	Next page	Next page
	Reset	Reset	Reset
	FN lock	FN lock	FN lock
	Touchpad on/off	Touchpad on/off	Touchpad on/off

FN Lock Key.

Press “ ”, the function of the Fn key will be locked, the function keys will be got directly without pressing Fn key. For example, for the iOS tablets, we want to search for sth, normally, we need press Fn+ ” together to get the function.

But if we press “ ”, the Fn key will be locked, we can press “ ” directly to get the function.

NOTE: Press FN and Q, W or E keys together to shift between Android, Windows or iOS systems after connected successfully. Otherwise the keyboard's function key will be invalid.

Q – Android W – Windows E – iOS

SPECIAL NOTE

1. This keyboard doesn't support the Windows Mobile.
2. For Android users: The Caps Lock indicator may not light up, but will still function normally.
3. Apple iOS will not support touchpad mouse function.

How to switch keyboard language

Samsung Android: Shift +Space







Google Android: Ctrl +Space

Windows: Win+Space

iOS 8 or below: Win+Space


iOS 9 or above: Ctrl+Space

Touchpad Function Analysis

Gesture drawing	Gesture description	Function In Windows	Function In Android
	One finger click	Mouse left button	Mouse left button
	Slide One finger	Move mouse pointer	Move mouse pointer
	One finger click quickly,hold and drag	Left button to select target to drag	Left button to select target to drag
	Two fingers click	Mouse right button	Mouse right button
	two fingers move vertically or horizontally	vertical,horizontal scroll	vertical,horizontal scroll
	Two fingers move	Zoom in/out	No function

Balance Stand Opening Steps

With two foot stands on both side to keep balance and stable when typing.

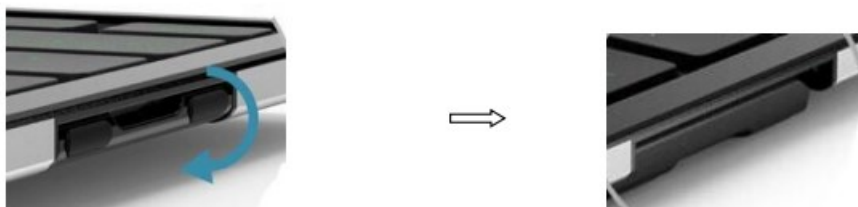

Power Saving Mode

The keyboard will enter sleep mode after being idle for 30 minutes.

To activate it, press any key and wait for 3 seconds.

How to charge it

1. Use the included USB cable for charging. Connect one end to a USB charger, and the other to the keyboard.
2. In charging, the power indicator will turn red. Generally, it takes approximately 2 hours for a full charge.
(charger is not included)

Caution

When not in use for a prolonged period of time, it is recommended that you turn off the keyboard to conserve the battery life.


Specification

Bluetooth Specification	Bluetooth 3.0
Unfolded Dimensions	278*90.56*5.65mm
Folded Dimensions	158.68*90.56*18.16mm
Touchpad dimensions	55.2*45.8mm
Operating Range	Up to 10 meters
Net Weight	220g
Modulation System	GFSK
Stand-by Time	90 days
Charge Time	< 2 hours

Uninterrupted Work Time	60 hours
Lithium Battery Capacity	210 mAh
Lithium Battery Life	3 years
Key Life	3 million clicks
Front side of keyboard	ABS
Back side of keyboard	Aluminum Alloy

Read More About This Manual & Download PDF:

Documents / Resources

	<p>iclever IC-BK08 Tri Folding Wireless Keyboard with Touchpad [pdf] User Manual</p> <p>IC-BK08 Tri Folding Wireless Keyboard with Touchpad, IC-BK08, Tri Folding Wireless Keyboard with Touchpad, Wireless Keyboard with Touchpad, Wireless Keyboard, Keyboard, Keyboard with Touchpad, Touchpad Keyboard</p>
---	--

References

- [iClever Kids Headphones – iClever.com](#)