Home » iFi Audio » iFi audio QSC-06 GO Pod Converts Wired IEMs Into Wireless Earbuds User Guide

iFi audio QSC-06 GO Pod Converts Wired IEMs Into Wireless Earbuds User Guide

Contents

- 1 QSC-06 GO Pod Converts Wired IEMs Into Wireless Farbuds
- **2 Product Information**
- **3 Product Usage Instructions**
 - 3.1 Set-Up
 - 3.2 Pairing
 - 3.3 Touch Control
 - 3.4 GAIA App Connection
 - 3.5 Documents / Resources

QSC-06 GO Pod Converts Wired IEMs Into Wireless Earbuds

_

Product Information

- MMCX and 0.78 mm 2 pin for secure fit and easy replacement of cables
- Charging case with LED battery status indicator (76-100%, 51-75%, 26-50%, 0-25%) and wireless charging capability
- LED touch control area for easy navigation and control of music playback, calls, and voice assistant
- · Microphone for hands-free calls and voice commands
- USB-C 5V/1.0A for charging the case
- · Pairing mode for easy connection with devices
- GAIA client for connecting to the GAIA app for personalized sound settings and firmware updates
- Ver1.4 firmware version

Product Usage Instructions

Set-Up

- 1. Scan the QR code on the user manual for a set-up video.
- Charge the earbuds and the charging case using the USB-C cable.

Pairing

- 1. Make sure the earbuds are turned off.
- Press and hold the left and right touch control areas together for 2 seconds to enter pairing mode (LED status will show "pairing").
- 3. In your device's Bluetooth settings, connect to "Go pod" to pair with the earbuds.


Touch Control

- Single tap on either earbud to play/pause music or answer/end calls.
- Double tap on the right earbud to skip forward to the next track.
- Triple tap on the right earbud to skip back to the previous
- Long press (2 seconds) on either earbud to wake up your device's voice assistant.

GAIA App Connection

- 1. Download and install the GAIA app on your device.
- 2. Make sure the earbuds are turned off.
- Press and hold the left and right touch control areas together for 15 seconds to connect to the GAIA app (LED status will show "GAIA").
- 4. Open the GAIA app and follow the instructions to connect to the earbuds.

View Fullscreen

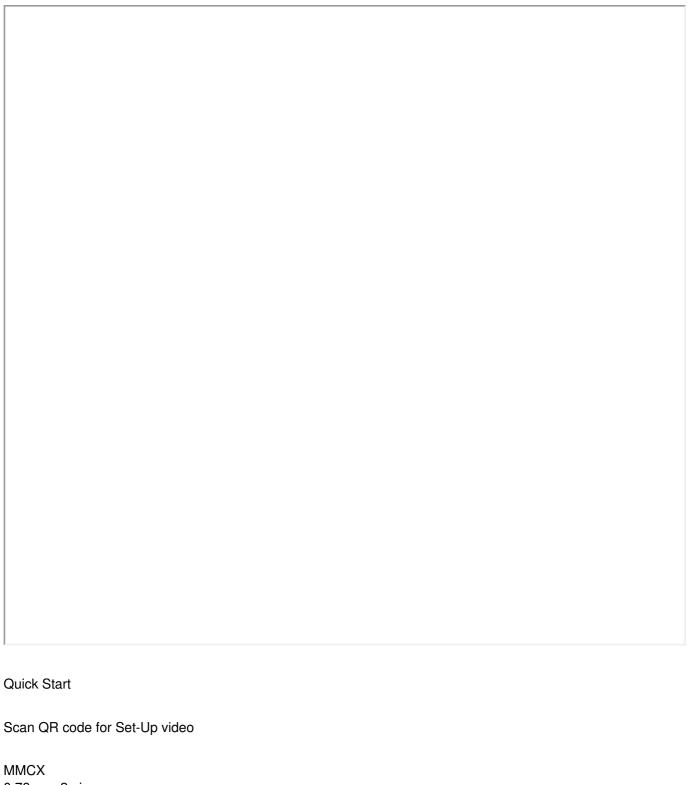

MMCX 0.78 mm 2 pin Charging Case Charging Case battery status 76-100% 51-75% 26-50% 0-25% Go pod charging point

LED Touch control area Microphone

Wireless charger

USB-C 5V/1.0A

Pairing

Hold left and right touch area together for 2 sec. to enter into Pairing Mode **LED Status** Connected Charging Awaiting connection Pairing Factory Reset Connect to `Go pod' In your device's Bluetooth setting Touch control Play/Pause/Answer call Single tap Skip Forward Double tap Skip Back Triple tap Wake Up Voice Assistant Long hold 2 sec. **Bluetooth Pairing** Press left and right together for 2 sec. **GAIA** Client Connect to Gaia app Hold left and right together for 15 sec. Ver1.4 **Documents / Resources**



iFi audio QSC-06 GO Pod Converts Wired IEMs Into Wireless Earbuds [pdf] User Guide QSC-06 GO Pod Converts Wired IEMs Into Wireless Earbuds, QSC-06, GO Pod Converts Wire d IEMs Into Wireless Earbuds, Wired IEMs Into Wireless Earbuds, Wired IEMs Into Wireless Earbuds, Wireless Earbuds, Earbuds, User Earbuds, User Earbuds, Wireless Earbuds, Earbuds

Manuals+,