


Infinix
Infinix XEOE01 X
Buds 3 Loop



Infinix XEOE01 X Buds 3 Loop User Manual

[Home](#) » [Infinix](#) » Infinix XEOE01 X Buds 3 Loop User Manual 

Contents

- [1 Infinix XEOE01 X Buds 3 Loop](#)
- [2 What's In The Box](#)
- [3 Product Overview](#)
- [4 Using Your Earbuds](#)
- [5 Product Specification](#)
- [6 Frequently Asked Questions](#)
- [7 Documents / Resources](#)
 - [7.1 References](#)
- [8 Related Posts](#)

Infinix

Infinix XEOE01 X Buds 3 Loop



What's In The Box



Charging case X1



True Wireless Earbud X2



USB-C Cable X1

Product Overview



1. Earbud Indicator
2. Multi-Function Button(MFB)
3. Microphone
4. Type-C Charging Port
5. Left Earbud
6. Right Earbud

Using Your Earbuds


① Protective film



3.2 CHARGING



Put the earbuds
back to the charging case.
Light flash, Steady on for 10s then goes off



Fully charge the case.

Connect the power supply outside the charging case charging


☀ ● ● ● <25%	○ ○ ☀ ● 50%~75%	○ ○ ○ ○ 100%
○ ☀ ● ● 25%~50%	○ ○ ○ ☀ ≥75%	

POWER ON/OFF

- Take out the earbuds from the charging case and the earbuds will power on automatically.
- Long press the left or right ear 3s (non -linking left and right).



- When the earbuds are outside the charging case and powered on. press and hold for 5 seconds on each earbud MFB button to power off.
- Put the earbuds back into the charging case and close the lid to power off automatically.

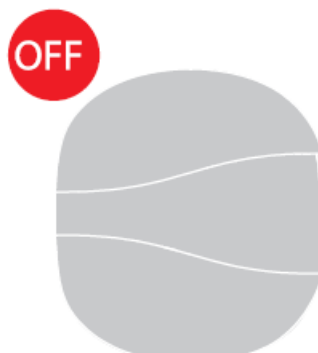

PAIRING



Earbuds will power on and enter pairing mode automatically when taking out the earbuds from charging case.

1. Make sure the distance of the earbuds and your device is less than 1 metre/3.3 feet at the first time of connection.
2. When turned on, the earbuds will automatically connect to the last connected device if available, If not, the earbuds will enter pairing mode. Under any abnormal condition, put the earbuds back into the charging case with the lid closed, then take out again after 15 seconds.
3. When the left earbud and right earbud are not paired automatically with status indicators flashing white on both earbuds, tap 6 times on both earbuds simultaneously to manually enter TWS pairing mode.

DOWNLOAD THE WELIFE APP

1. Scan the QR code to quickly download the Welif app for preferred sound effects, customer support, connection popup, and more features to discover (for Andr
2. Make suroid 7.0+ dee y vices).our earbuds are powered on, then open the Welif app and tap the “Add Device” button to pair

*Only for dethe earbuds with the app.vices running Android 7.0 and later versions.

Experience Multiple EQ Modes:

Support Bass Booster, Treble Booster, Vocal Booster, and Default mode. Choose the one that suits you best.

Quick Activation of Game Mode:

Enable Game Mode quickly in the app to achieve better synchronization of audio and video for an enhanced gaming experience.



Touch Controls Customization:

Discover or customize the functions triggered with earbuds touch controls Answering calls and controlling music are at your fingertips.

RESET









(Try the following steps if you fail pairing between two earbuds, or between earphones and device)





1. Clear pairing record between the earbuds and your device in the bluetooth pairing list on your device.
2. Keep the earbuds in disconnected or standby mode take out the earbuds from the charging case, simultaneously tap 4 times and then long press on both MFB button within 3 seconds to clear the pairing record and enter the pairing mode automatically.

CONTROLS








MUSIC

 X2	Tap twice on one earbud		Play/Pause
 1.5"	Press and hold for 1.5 seconds on the left earbud		Previous Track
 1.5"	Press and hold for 1.5 seconds on the right earbud		Next Track

CALL

 X2	Tap twice on one earbud		Answer/End a call
 2"	Press and hold for 2 seconds on one earbud		Reject

OTHER

 X3	Tap three times on the right earbud		Activate Volve Assistant
 X1	Tap once on the left earbud		Decrease the volume
 X1	Tap once on the right earbud		Increase the volume
 X4+3"	Tap four times and then long press the MFB button within three seconds on both earbuds(power on status)		Reset

Product Specification

Input	5V---500mA
Speaker Driver	Φ16.2mmx2
Battery Capacity	75mAhx2(earbuds), 400mAh(charging case)
Impedance	20Ω
Charging Time	Approx 2 hours (earbuds). 2.5 hours (charging case)
Play-time	Up to 9 hours (Totally 36 hours with the charging case)
Talk time	Up to 7 hours
Bluetooth Range	10m/33ft
Rated Output Power	10mW
Frequency Response	20Hz-20KHz

CONSIDERATEHINTS

Do not turn up the volume to a fair high level constantly as this could shorten the service life or this product or impair your hearing. When encounter any fault during operation, please cut off the power supply and disconnect the type-C cable to prevent further damage to the product or other components.

The Wireless transmission range or connectivity could be affected by low battery power, In that case, please recharge immediately.

ATTENTION

- Use original or certified cables
- Do not expose to the liquids
- Do not disassemble
- Avoid dropping
- Avoid extreme temperatures

Do not use the product outdoors during a thunderstorm Do not use any corrosive cleaner/oil to clean

CAUTION

1. Use carefully with the earphone, maybe excessive sound pressure from earphones and headphones can cause hearing loss.
2. Risk of explosion if battery is replaced by an incorrect type, dispose of used batteries according to the instructions.
 - disposal of a battery into fire or a hot oven, or mechanically crushing or cutting of a battery, that can result in an explosion;
 - leaving a battery in an extremely high temperature surrounding environment that can result in an explosion or the leakage of flammable liquid or gas;
 - a battery subjected to extremely low air pressure that may result in an explosion or the leakage of

flammable liquid or gas.

3. EUT Temperature: 0°C~+45°C(with adapter).

4. To prevent possible hearing damage, do not listen at high volume levels for long periods.



High sound pressure with hearing damage risk.

Do not listen at high volume levels for long periods.

Frequency Range(RF)

BT: 2400-2483.5MHz(TX/RX)

Max. Of TBT(EDR): 5.89dBm transmit power:

BLE:4.44 dBm

EU DECLARATION OF CONFORMITY

The full text of the EU declaration of conformity is available at the following internet address:

<https://www.infinixmobility.com/care/declaration>

Frequently Asked Questions


- **Q: How do I charge the earbuds?**

A: Place the earbuds back in the charging case and connect it to a power source using the provided USB-C cable.

- **Q: How do I know if the earbuds are fully charged?**

A: The earbud indicator will show a steady light when they are fully charged.

Documents / Resources

 <p>Infinix XBuds 3 Loop Model: XEOE01 User Manual</p> <p><small>INFINIX MOBILE LIMITED Responsible for the technical content and accuracy of the information provided in this manual. All rights reserved. No part of this manual may be reproduced without prior written permission from Infinix Mobility Limited. Please refer to the back of the manual for more information.</small></p>	<p>Infinix XEOE01 X Buds 3 Loop [pdf] User Manual</p> <p>XEOE01, XEOE01 X Buds 3 Loop, XEOE01, X Buds 3 Loop, Buds 3 Loop, 3 Loop</p>
--	---

References

- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.