



infobit iHub 901W USB Type C Hub 9-In-1 with Wireless Charging User Manual

[Home](#) » [infobit](#) » infobit iHub 901W USB Type C Hub 9-In-1 with Wireless Charging User Manual 

infobit iHub 901W USB Type C Hub 9-In-1 with Wireless Charging User Manual



NOTE

1. Please use $\geq 60W$ power adapter in order to make sure product works stable and full, if using $\leq 60W$ power adapter, maybe it causes product works unstable.
2. Do not place the metal block on the top of the docking station for a long time.
3. TF and SD card can't be recognized on the same time, only plug in TF card or SD card separately when using.

Contents

- [1 Introductions](#)
- [2 Product Features](#)
- [3 Specifications](#)
- [4 Interface Diagrams](#)
- [5 Connection and Operating](#)
- [6 Documents / Resources](#)
 - [6.1 References](#)
- [7 Related Posts](#)

Introductions

USB C Hub, 9 in1 USB C Docking Station to HDMI,Wireless Charger, Gigabit Ethernet, 3 USB 3.0, 60W PD RJ45,SD/TF Card Reader, USB C Dock for MacBook Pro and Type C Device (Thunderbolt 3)

Product Features


Built-in USB Type-C pigtail cable, plug and play
3x USB A 3.0 ports, 5Gbps
1x card reader: TF/SD
1x 10M/100M/1,000M Gigabit Ethernet port
1x HDMI Output port: resolutions up to 4K30
1x USB C PD 60W port
1x 7.5W wireless charging pad'

Specifications


Model	iHub 901W
Name	USB Type C Hub 9-in-1 with wireless charging
HDMI output resolution	3840×2160/30Hz
RJ45 max speed	1000Mb/S
USB port max speed	5.0 Gbs
TF card max speed	480Mb/s
SD card max speed	480Mb/s
PD charging power	60W

PD Maximum input voltage	20V
Wireless charging max power	9V/7.5W
Range of working temperature	-10~+55°C
Storage temperature	-26~+60°C
Working humidity	10~90%RH (non-condensing)
Storage humidity	5~95%RH (non-condensing)
Bare metal size	390x 96.5x 25.8 mm
Bare weights	125g
Shell Material	Plastic + Alloy
Shell Color	Black


Interface Diagrams

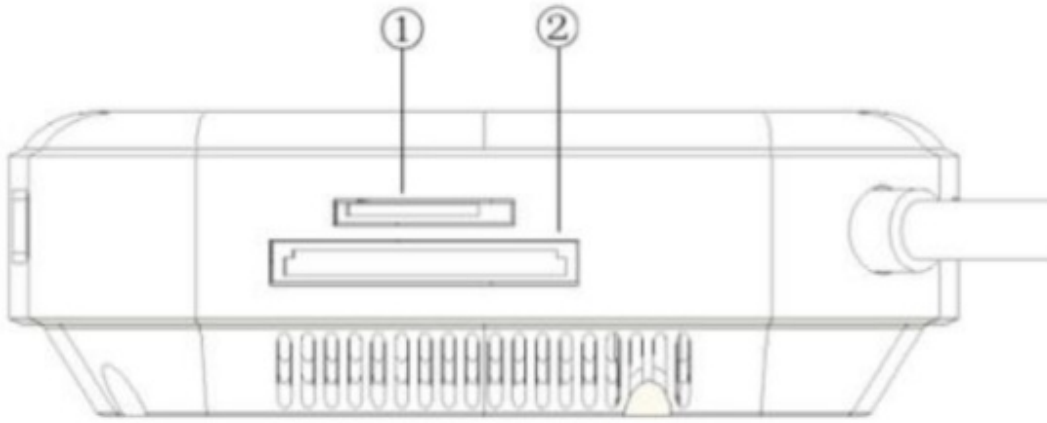


1. Card Reader: TF card port (TF card and SD card cannot be recognized at the same time)
2. Card Reader: SD card port (TF card and SD card cannot be recognized at the same time)

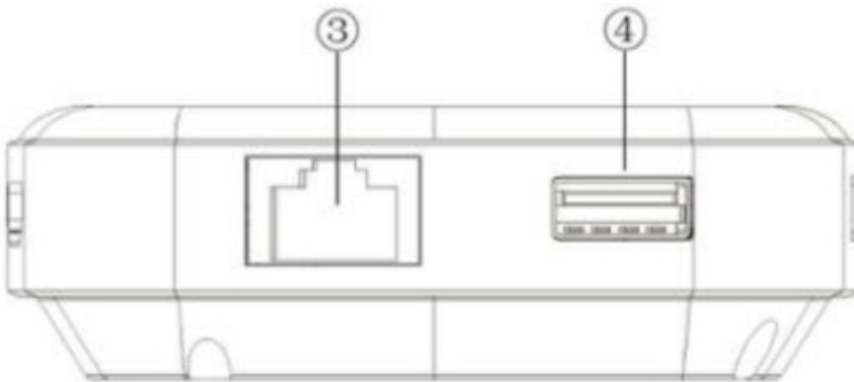


3. Gigabit Ethernet port
4. USB3.0 A

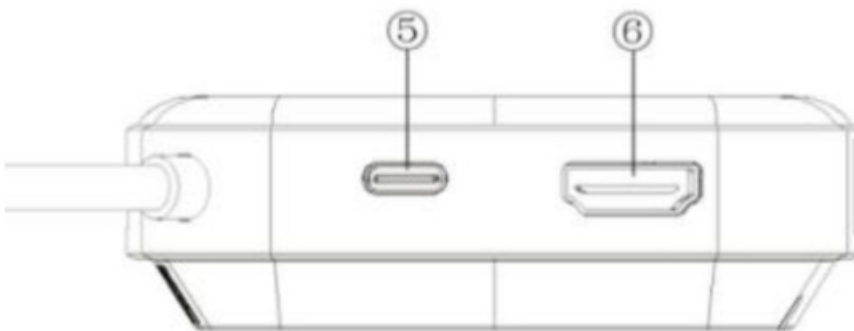

5. PD interface, connect to laptop's power adapter
6. HDMI Output port, supports 4k resolution

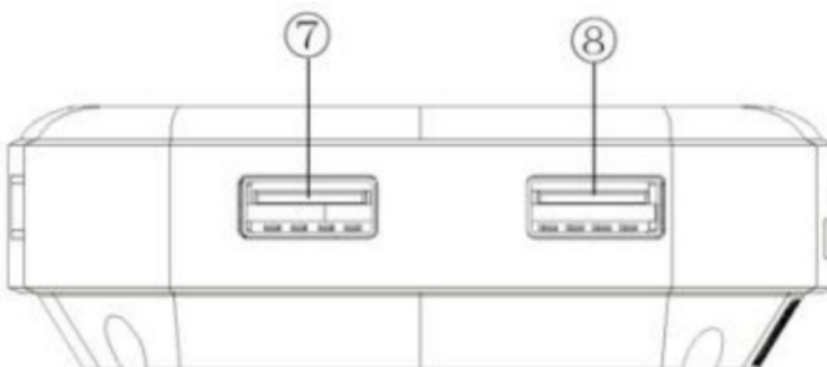


7. ⑦⑧ USB3.0 A interfaces

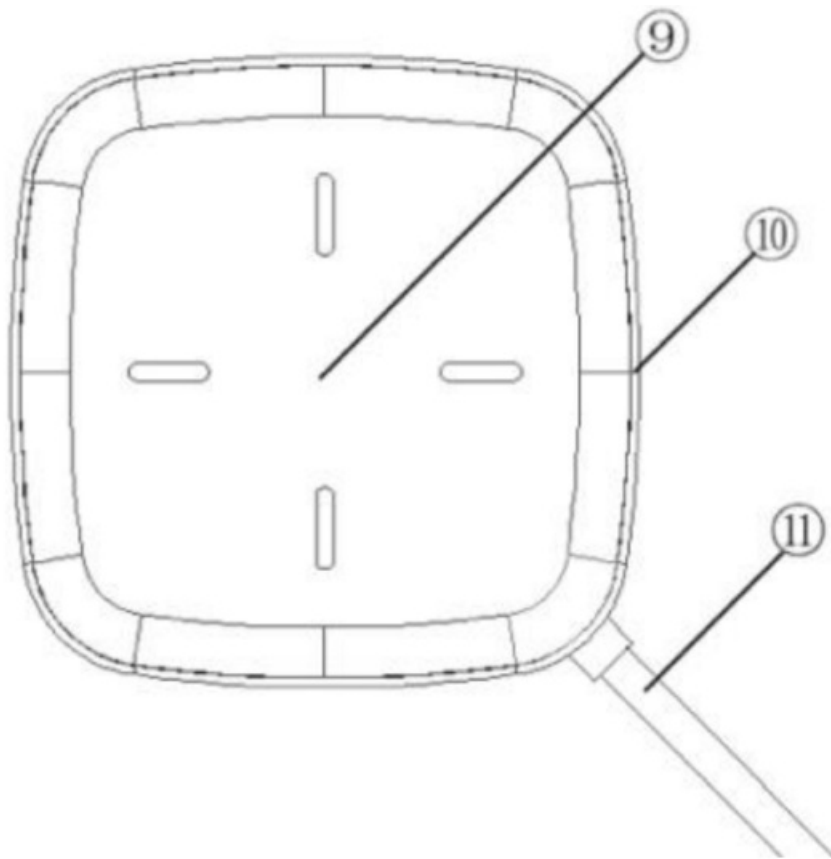

- 8. Wireless charging area, make sure to place device into here correctly
- 9. Wireless charging indicator light, respiration status indicator during charging
- 10. Type-C cable, connect to the type-c port on laptop

Connection and Operating

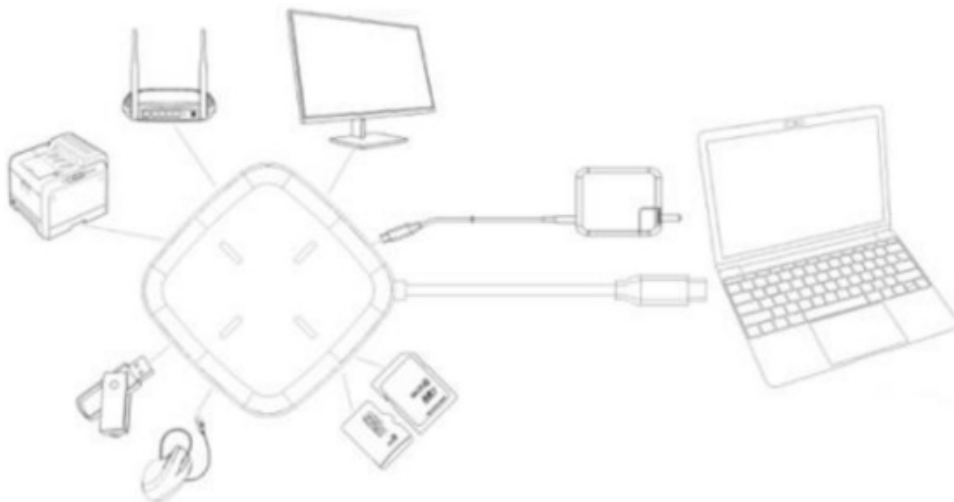

- 1. Connect the devices which you need to use to corresponding interface: like USB Disk, Mouse, Keyboard, Printer, Router, Display etc.
- 2. Connect the power adapter to the PD
- 3. Connect the docking station to the Type-C port of computer.
- 4. Place the mobile phone to charge



Documents / Resources

 <p>The image shows the infobit iHub 901W, a black, rectangular USB Type C hub. It has a USB Type C port on one side and multiple other ports (USB-A, HDMI, etc.) on the other. The infobit logo is visible on the top surface.</p>	<p>infobit iHub 901W USB Type C Hub 9-In-1 with Wireless Charging [pdf] User Manual iHub 901W, USB Type C Hub 9-In-1 with Wireless Charging</p>
--	---

References

- [infobit AV- 4K Matrix Switchers, Wireless Presentation, Active Optical Cable and Conference Camera- Meeting Room Solutions](#)
- [infobit AV- 4K Matrix Switchers, Wireless Presentation, Active Optical Cable and Conference Camera- Meeting Room Solutions](#)