

innosystemtech MZ-629 Riding Speaker With Bracket User **Manual**

Home » innosystemtech » innosystemtech MZ-629 Riding Speaker With Bracket User Manual



Contents

- 1 innosystemtech MZ-629 Riding Speaker With **Bracket**
- 2 Specifications
- **3 Product Usage Instructions**
- **4 Safety Instructions**
- **5 Packaging Content**
- **6 Product Parameters**
- **7 Product Description**
- **8 Operation Instructions**
- **9 Connection Memory Function**
- 10 Charging Tips
- 11 Call Function
- 12 TF Card Mode
- 13 TWS Pairing
- 14 Warranty Card
- **15 Frequently Asked Questions**
- 16 Documents / Resources
 - 16.1 References

innosystemtech

innosystemtech MZ-629 Riding Speaker With Bracket



Specifications

• Working hours: 4-6 hours

• SNR: 95dB

Wireless distance: 10m
Frequency: 200Hz-20KHz
Bluetooth version: V5.4
Battery capacity: 500mAh
Charging time: 1-2 hours

• Working voltage: DC 3.7V

• Rated power: 5W

• Waterproof grade: IP67

Product Usage Instructions

Operation Instructions

- Step 1: Press and hold the power button for 3 seconds to activate Bluetooth mode. The blue light will flash, indicating the speaker is ready to pair with your mobile device.
- Step 2: Turn on the Bluetooth function on your phone or other Bluetooth device, and then search for a speaker named MZ-629. Connect to the speaker.
- Step 3: After successful pairing, there will be a prompt sound and the blue indicator light will remain on.
- Step 4: Play music on the phone. When playing music, the blue indicator light will flash.
- Step 5: To connect the speaker to a new device, press and hold the Play/Pause/Pairing button for 3 seconds to disconnect the current connection and enter pairing mode. The blue indicator light will flash slowly. The speaker can then be connected to a new device.

Support Bracket Installation Guide

- Step 1: Push frame A firmly against frame B to secure them together.
- Step 2: Unscrew the screws from the bracket.
- Step 3: Place the anti-slip pad into the ring of the bracket. Secure the bracket to the bicycle by passing it through the ring. Then use the screws taken out in Step 2 to tighten the bracket.
- Step 4: After installing the bracket, push the speaker into the bracket. Once you hear a click sound, the speaker
 is properly installed.

Safety Instructions

- Read all instructions and save them for future reference.
- Do not place it near a heat source. Avoid using radiators, stoves, and other equipment that can generate heat. Avoid long-term exposure to sunlight and high temperatures.
- Please note that when Bluetooth is disconnected for 10 minutes, the speaker will enter sleep mode and shut down. To restart the speaker, press the power switch button.

Packaging Content

- · Speaker x1
- Bracket x1
- · Charging cable x1
- User manual x1

Product Parameters

• Working hours: 4-6hours

• SNR: ≥95dB

Wireless distance: ≤10m
Frequency: 200Hz-20KHz
Bluetooth version: V5.4

Product Parameters

Battery capacity: 500mAhCharging time: 1-2hoursWorking voltage: DC 3.7V

· Rated power: 5W

• Waterproof grade: IP67


Product Description

- 1. Power Switch: Press and hold for 3 seconds to turn on/off. Press and hold for 10 seconds to reset. After resetting, the device will automatically turn on.
- 2. Volume up key: Single press for the next song. Long press for volume up.
- 3. Play/Pause/Pair:

- Short press: Play music/Pause music/Answering a phone call.
- Double press: Enter TWS mode.
- Long press: Force disconnect the current Bluetooth connection/Reject a call.
- 4. Volume down key: Single-press for the previous song. Long press for volume down.

Work/Charging indicator light (blue/red light)


- 5. TF card interface
- 6. Power interface: DC 5V

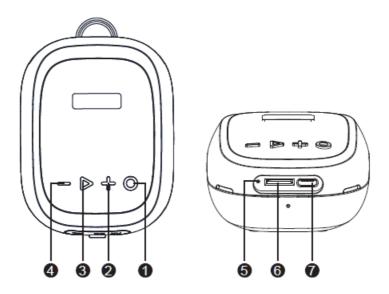

Operation Instructions

• Step 1

Press and hold the power button "OI" for 3 seconds to activate Bluetooth mode. The blue light will flash, indicating the speaker is ready to pair with your mobile device.

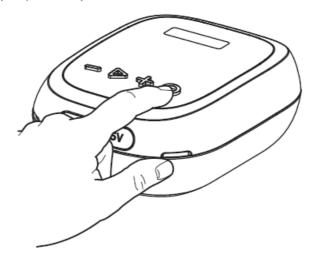

• Step 2


Turn on the Bluetooth function on your phone or other Bluetooth device, and then search for a speaker named MZ-629. Connect to the speaker.

• Step 3

After successful pairing, there will be a prompt sound and the blue indicator light will remain on.

• Step 4

Play music on the phone. When music is playing, the blue indicator light will flash.



• Step 5

To connect the speaker to a new device:


When connecting the speaker to a device, you can press and hold the Play/Pause/Pairing button " or 3 seconds to disconnect the current connection and enter pairing mode. The blue indicator light will flash slowly. The speaker can then be connected to a new device. In Bluetooth mode, it will automatically reconnect to the last connected device upon power-on and will turn off after 10 minutes of no connection.



Support Bracket Installation Guide


• Step 1

Push frame A firmly against frame B to secure them together.

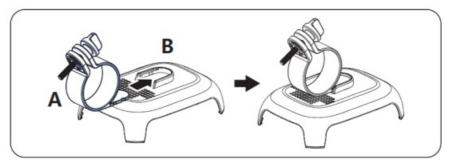

Step 2


Unscrew the screws from the bracket.

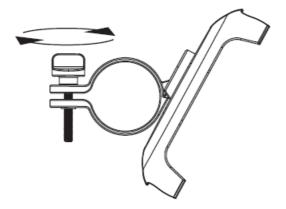

• Step 3


Place the anti-slip pad into the ring of the bracket. Secure the bracket to the bicycle by passing it through the

ring. Then use the screws taken out in Step 2 to tighten the bracket.

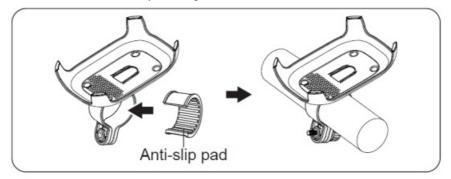


• Step 4

After installing the bracket, you can push the speaker into the bracket. Once you hear a click sound, the speaker is properly installed.

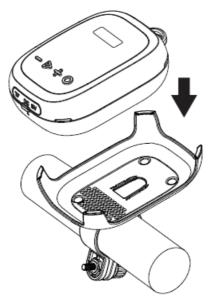

• Step 5

If you need to remove the speaker, simply press the raised part of the bracket to release and remove it

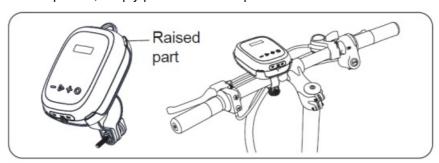

Connection Memory Function

If the device's Bluetooth feature is enabled, the speaker will automatically connect to the last paired device upon powering on.

Charging Tips

- When the battery is low, the speaker will sound a warning sound and need to be charged.
- The red indicator light remains on during charging but goes off when fully charged.
- It is recommended to charge products with lithium batteries every three months when not in use.

Call Function

- Answering Calls: When the speaker is connected to your phone, if there is an incoming call, you can simply press the play/pause button "

 " to answer the call.
- Rejecting Calls: When the speaker is connected to your phone, if there is an incoming call, you can reject the call by long-pressing the play/pause button " ".

TF Card Mode

- After inserting the TF card, the speaker will enter TF card mode. You can switch modes by briefly pressing the power button " O ."
- In TF card mode, the blue indicator light will flash when playing music.

TWS Pairing

- Two TWS speakers that have not been paired before are powered on separately, and the blue indicator lights are flashing.
- Double-click the play/pause/pair button " on any speaker to enter TWS pairing mode.
- After successful pairing, the blue indicator light of the main speaker remains on when connected to the phone, flashes when disconnected, and the blue indicator light of the secondary speaker remains on.
- The speaker initiating TWS pairing is the main speaker.

Note:

For the two successfully paired speakers, you can disconnect the TWS connection by double-clicking the play/pause/pairing button " on the primary speaker.

Warranty Card

- · Model Date of purchase
- Distributor Name
- TEL E-mail
- ADD

Warranty Records

Name	Fault description	Repair date	Maintainer

CERTIFICATE

- DATE
- QC

Frequently Asked Questions

· How do I restart the speaker if it enters sleep mode?

If the Bluetooth is disconnected for 10 minutes, the speaker will enter sleep mode. To restart, press the power switch button.

· What should I do if the speaker does not pair with my device?

Make sure the speaker is in Bluetooth mode and visible to other devices. Restart both the speaker and your device, then attempt to pair again.

Documents / Resources



innosystemtech MZ-629 Riding Speaker With Bracket [pdf] User Manual
629, MZ-629 Riding Speaker With Bracket, MZ-629, Riding Speaker With Bracket, Speaker With Bracket, Bracket, Speaker

References

User Manual

Manuals+, Privacy Policy

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.