



ITC elio 21055 VersiControl RGB Control Pad Instruction Manual

[Home](#) » [ITC elio](#) » ITC elio 21055 VersiControl RGB Control Pad Instruction Manual 

Contents

- [1 ITC elio 21055 VersiControl RGB Control Pad](#)
- [2 Install Instructions](#)
- [3 Safety Instructions](#)
- [4 Controller](#)
- [5 Documents / Resources](#)
 - [5.1 References](#)
- [6 Related Posts](#)



ITC elio 21055 VersiControl RGB Control Pad



Install Instructions

• PARTS / TOOLS NEEDED:





- VersiControl RGB Smart Pad
- RGB Lighting (Varies)
- Mounting Screws x 22" Hole Saw Bit
- Power Drill

Safety Instructions

- Disconnect power before installing, adding or changing any component.
- To avoid a hazard to children, account for all parts and destroy all packing materials.
- Do not install any luminaire assembly closer than 6" from any combustible materials.
- Positive (+) outputs require a fuse if the attached wire leads are not rated to handle the max current.


1. INSTALL CONTROL PAD:

Determine the installation location of your control pad. Note the control module comes with a 7" long cord so the control pad will need to be located near the module. Drill a 2" hole and insert the control pad. Install the mounting bracket using the two 3x19mm stainless steel Phillips pan head screws provided. Do not fully torque screws until both have been partially installed.



2. CONNECT CONTROL PAD:

Insert the connector on the control pad into the connector on the module.

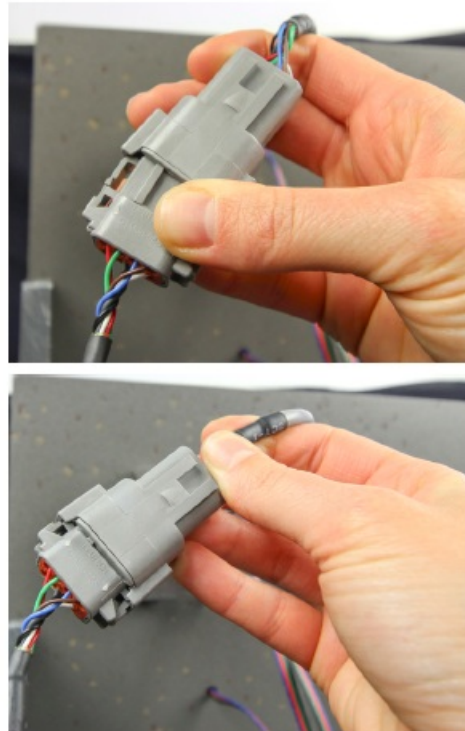

Controller

1. V(+) – Brown
2. V(-) – Gray
3. Shield – Black
4. Signal Line – White
5. CAN (+) – Yellow
6. CAN (-) – Green

*Mating connector Deutsch DTM06-6S

For warranty information please visit www.itc-us.com

- 3030 Corporate Grove Dr.
- Hudsonville
- MI 49426
- Phone: 616-396-1355 • www.itc-us.com sales@itc-us.com
- DOC#: 710-00026 Rev D06/01/21

OPERATION:

Below is the keypad overview, for more detailed operational instructions, review your owners manual or visit

<http://www.itc-marine.com/product-category/lighting/versicolor-rgb/>

RGB Indicator LED

- If adjusting colors, this will indicate the current color selected
- If Quick White button is pressed LED will turn white and flash

Brightness Adjust Mode

- Enables the ability to adjust the brightness of light output

Left & Right Buttons

- Color Mode: Cycle through RGB colors
- Dim Mode: Increase or decrease brightness of light
- Fade Mode: Increase or decrease fade speed

Main Power

- Turns system on/off. When powered back on system returns to previous state

Color Select Mode

- Enables RGB color selection within currently selected mode

Zone Select Buttons

- Enables selection of zones 1 - 4 to initiate a color or mode change within that zone

Effects Mode

- Enables seven color face within the active zones

Quick White Button


- One press turns all zones white
- Press again to return to previous state



Note:

To reset the Bluetooth passcode and clear lock zones, press and release both arrow keys at the same time.

Documents / Resources

	ITC elio 21055 VersiControl RGB Control Pad [pdf] Instruction Manual 21055, VersiControl RGB Control Pad
---	---

References

- [Register a .US.COM domain today!](#)
- [ITC Designs that inspire, products that perform.](#)