




JASCO All-in-One 7-day Digital Timer Installation Guide

[Home](#) » [JASCO](#) » JASCO All-in-One 7-day Digital Timer Installation Guide 

JASCO All-in-One 7-day Digital Timer Installation Guide



Contents


- [1 JASCO All-in-One 7-day Digital Timer Installation Guide](#)
- [2 Documents / Resources](#)
 - [2.1 References](#)
- [3 Related Posts](#)

JASCO All-in-One 7-day Digital Timer Installation Guide



Specifications

- **Power:** 120 VAC
 - **Signal Frequency:** 60Hz
 - **Maximum Load:** 1200 W tungsten, Ballast 1200VA, Electronic Ballast 5A, 1/2 HP motor, 1800 W (15 A) restive
 - **Maximum Traveller Length:** 200 ft.
 - **Operating Temperature:**
32-104 °F (0-40 °C)
 - **Operating Humidity:** 5-85%
 - **Minimum Hole for Wire:** #12 AWG (0.081 dia) and #14 AWG wire
 - **Warranty:** 1-year limited product warranty
- Requires neutral wire. Switch must be mounted indoors.**

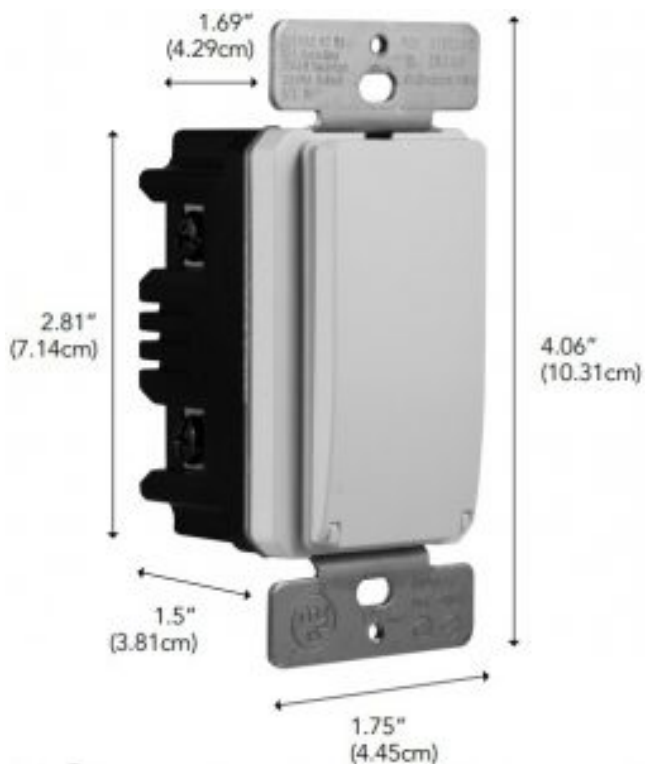

Design Features

- Simple myTouchSmart Programming
- SunSmart Technology – Automatically adjusts to sunrise and sunset times in your region
- 24 Hour Countdown Mode
- 7-Day – Daily or Weekly Settings
- 8 Custom my ON/my OFF settings
- ON/OFF button overrides the current setting and blends in with other switches
- Single Pole and 3-Way
- Easy Installation – Screw terminals, no flying leads
- Rechargeable NiMH battery automatically saves settings and is a back up battery for up to 30 days
- Works with LED, CFL, Incandescent & Halogen · Light up backlight
- White or Light Almond door gives timer a classy look and works as an On/Off Over-ride switch


White/light almond covers included






ON/OFF switch
opens to reveal
program buttons


- Single-pole Wiring

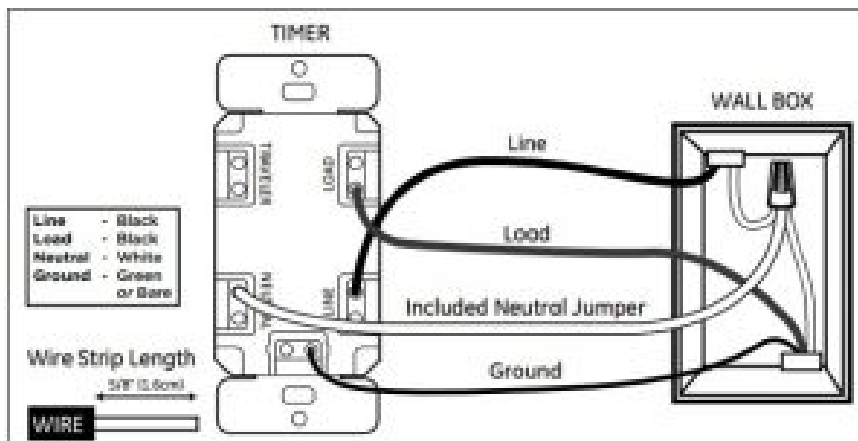

- Timer on LOAD Side 3-way Installation

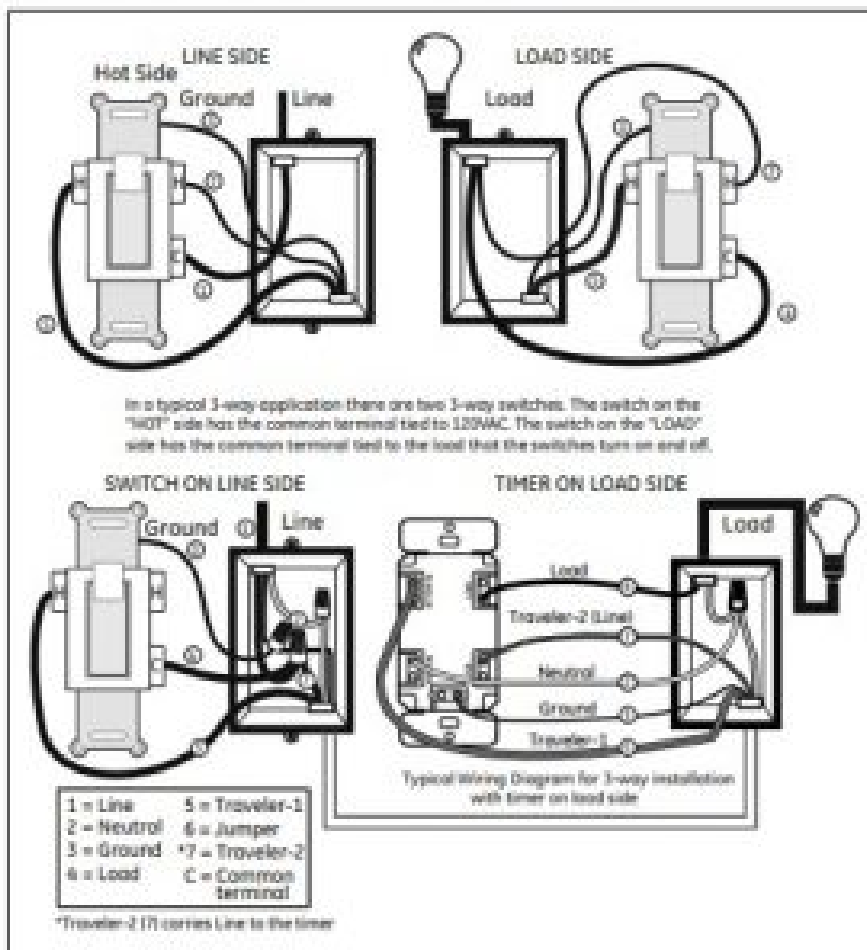


• Timer on LINE Side 3-way Installation

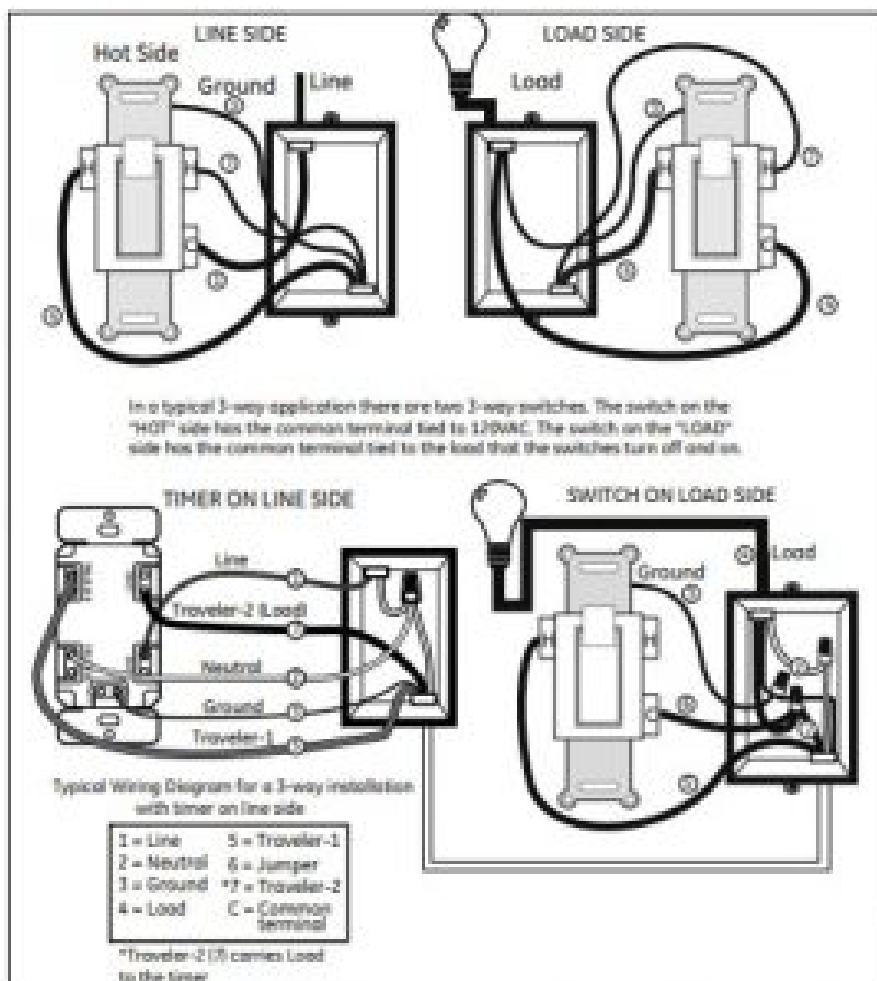

• Additional Installation Information

- Indoor use only
- Wall plates sold separately
- Bilingual instruction manual – English and Spanish
- Visit myTouchSmart.com for more information

• **Device Configuration**

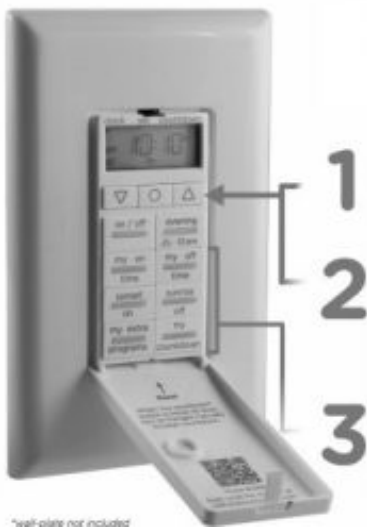

- 1. Just scroll to set the current time**
- 2. Select your region so sunsmart technology /sunset times in your area.**
- 3. Choose from preset options or set custom times.**

• **Certifications & Compliances**

Compliances, specifications and availability are subject to change without notice Distributed by Jasco Products Company LLC 10 E. Memorial Rd., Oklahoma City, OK Questions? Contact our U.S.-based Consumer Care at 1-800-654-8483 between 7AM-8PM, M-F, Central Time.


©Jasco 2021

Related Products – myTouchSmart In-Wall Timers

• **41149**

In-Wall Wi-fi

Smart Dimmer

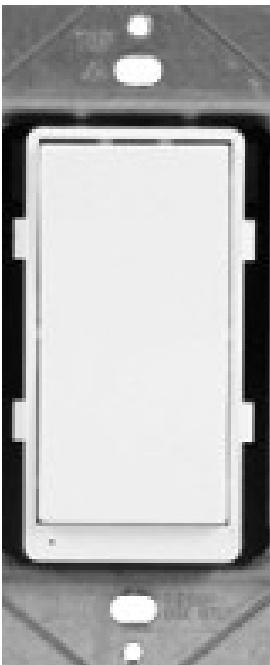

- **41150**

Plug-in Wi-fi
Smart Outlet



- **41147**

In-Wall Wi-fi
Smart Switch



- **41431**

Simple Set 24hr
Digital Timer




- **26893**

Simple Set
In-Wall Timer



For additional myTouchSmart products visit myTouchSmart.com

Documents / Resources

	JASCO All-in-One 7-day Digital Timer [pdf] Installation Guide All-in-One 7-day Digital Timer, 33861
---	--

References

- [myTouchSmart](https://myTouchSmart.com)
- [Jasco](https://www.jasco.com)