



JBL Pulse 5 Portable Bluetooth Speaker with Light Show User Guide

[Home](#) » [JBL](#) » JBL Pulse 5 Portable Bluetooth Speaker with Light Show User Guide 

JBL Pulse 5 Portable Bluetooth Speaker with Light
Show User Guide





QUICK START GUIDE

WHAT'S
IN THE
BOX





DI IIFTOTII




BLUETOOTH PAIRING



2



1

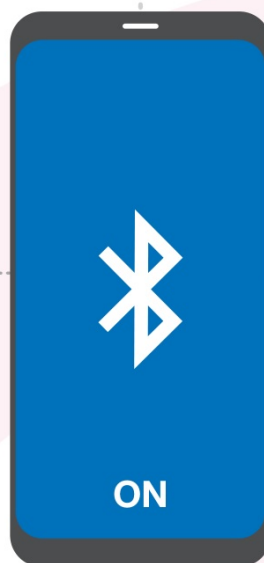

PLAY




PARTY BOOST





APP

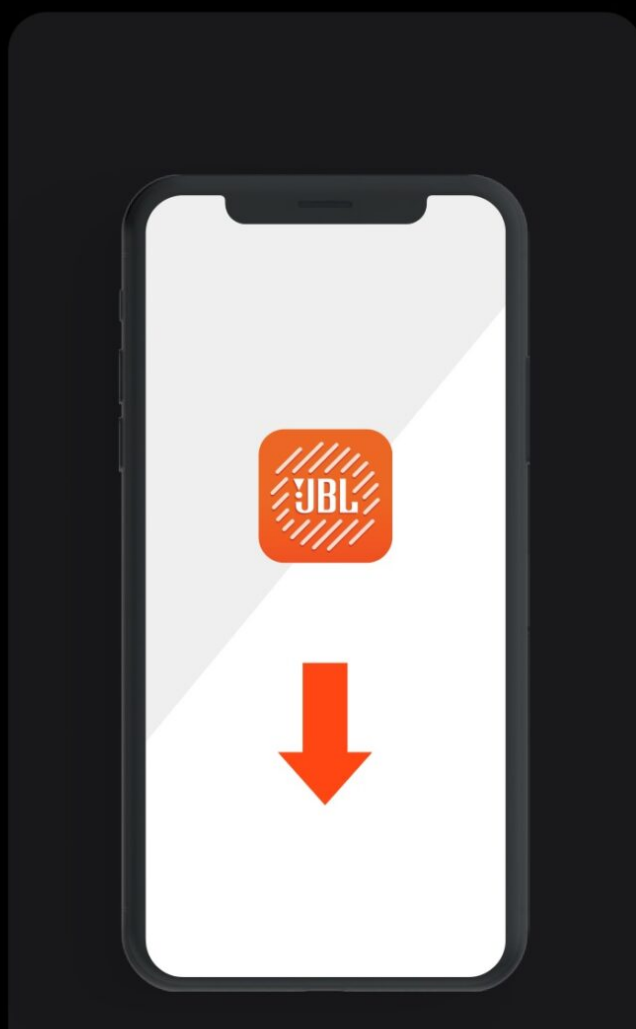



JBL PORTABLE


USE THE JBL PORTABLE APP FOR SPEAKER CONFIGURATION AND SOFTWARE UPGRADE.



<https://apps.apple.com/us/app/jbl-portable/id994041762>

<https://play.google.com/store/apps/details?id=com.harman.ble.jbllink&hl=en&gl=US>

LIGHTSHOW

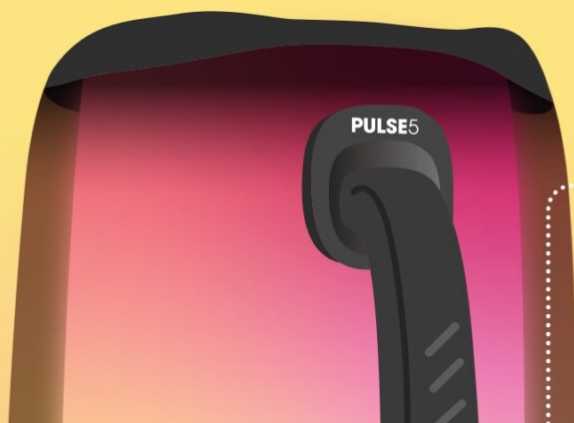



CHARGING





IP67 DUSTPROOF & WATERPROOF



 30 MINS

 0M



1M



TECH SPEC

Transducers:	1 x 64 mm woofer / 2.5", 1 x 16 mm tweeter / 0.63"
Output power:	30 W RMS for Woofer, 10 W RMS for Tweeter
Power input:	5 V / 3 A
Frequency response:	58 Hz - 20 kHz (axial, -6 dB)
Signal-to-noise ratio:	> 80 dB
Battery type:	Li-ion polymer 27 WH (equivalent to 3.6 V / 7500 mAh)
Battery charge time:	< 4 hours (5 V / 3 A)
Music play time:	up to 12 hours (dependent on volume level and audio content)
Cable type:	USB-C charging cable
Cable length:	1200 mm / 47.2"
Bluetooth® version:	5.3
Bluetooth® profile:	A2DP 1.3, AVRCP 1.6
Bluetooth® transmitter frequency range:	2.4 GHz - 2.4835 GHz
Bluetooth® transmitter power:	< 10 dBm (EIRP)
Bluetooth® transmitter modulation:	GFSK, $\pi/4$ DQPSK, 8DPSK
2.4GHz SRD frequency range:	2407 MHz - 2475 MHz
SRD transmitter power:	\leq 13 dBm (EIRP)
Product dimensions (W x H x D):	107 mm x 214 mm x 131 mm / 4.2" x 8.5" x 5.2"
Net weight:	1.47 kg / 3.23 lbs
Packaging dimensions (W x H x D):	254 mm x 145 mm x 143 mm / 10" x 5.7" x 5.6"
Gross weight:	2.2 kg / 4.8 lbs
Maximum operation temperature:	45 °C



To protect battery lifespan, fully charge at least once every 3 months. Battery life will vary due to usage patterns and environmental conditions.

Do not expose the JBL Pulse 5 to liquid without removing cable connection and ensure the charging port lid is tightly closed. Do not expose JBL Pulse 5 to water while charging. It may result in permanent damage to the speaker or power source.

Chemicals, salt or “foreign particles” in your pool or the ocean can damage the waterproof seals or harm the connector surface over time if not rinsed off after use. After a liquid spill or rinse, do not charge your speaker until it’s completely dry and clean. Charging when wet might damage your speaker.

When using an external adapter, the output voltage/ current of the external adapter should not exceed 5V/3A.



The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by HARMAN International Industries, Incorporated is under license. Other trademarks and trade names are those of their respective owners.

Contents

[1 Documents / Resources](#)

[2 Related Posts](#)



Documents / Resources



[JBL Pulse 5 Portable Bluetooth Speaker with Light Show](#) [pdf] User Guide

Pulse 5, Portable Bluetooth Speaker with Light Show, Pulse 5 Portable Bluetooth Speaker with Light Show, Portable Bluetooth Speaker, Bluetooth Speaker, Speaker

[Manuals+.](#)