


## Jewenwils HGPB50A Generator Inlet Box Instruction Manual

# ***Jewenwils*** **Generator Inlet Box**

[Instruction Manual]

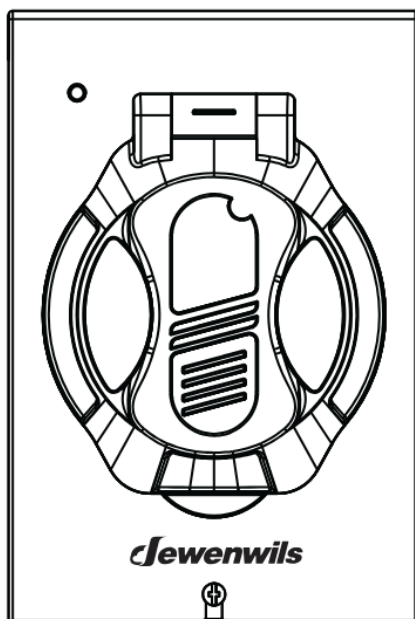

Please pay button attention to the warning signs. Read the instruction with caution before operation and keep it properly.

**Warning: DANGER-RISK OF ELECTRIC SHOCK. DO NOT START THE GENERATOR UNTIL THE CORD IS CONNECTED TO THIS INLET AND THE GENERATOR**  
Failure to comply with this instruction could result in an electrical failure, fire and electrocution.

**IMPORTANT:** Installation of this power inlet box and related wiring must be done by a qualified electrician in compliance with all applicable electrical codes, ANY

**TERMINAL MAY BE ENERGIZED WHEN THE CORD IS CONNECTED. SHUT DOWN THE GENERATOR FOR TO DISCONNECTING THE CORD FROM THIS INLET AND THE GENERATOR FOR POWER INLET ONLY. NOT FOR USE AS AN OUTLET. NOT FOR INDOOR USE.**When used to power a structure, this inlet must be used in conjunction with a transfer switch to comply with the NEC and to avoid serious safety risks.



1. To be installed and/or used in accordance with appropriate electrical codes and regulations.
2. Installation of this power outlet box and related wiring must be done by a qualified electrician in compliance with all applicable electrical codes.
3. Use this product with copper wire.
4. Do not connect any devices which may exceed the maximum ratings.
5. Children are not allowed to use the product.

### **Installation instructions**

1. Read Important Safety Information below before beginning installation.
2. Select the knockouts to be used. Remove the inner 1/2" knockout by inserting a screwdriver in the slot and carefully punching the knockout loose. Remove slug. If 3/4" knockout is required, also remove the outer ring with pliers after removing the 1/2" knockout. Smooth any rough edges with a file or sandpaper, if necessary.
3. Remove the protection cover by removing the screw holding the cover in place
4. Place the box in the mounting area and use the screws, inserted into the screw holes on the back of the box, to secure the box in the mounting position.
5. Follow the wiring diagram below
6. Reassemble the protection

### **Wiring**

Wire Gauge: 6AWG~ 8AWG.Strip the wire insulation 3/5"(15mm,FIG1) (do not tin conductors) and connect the wires in the power outlet box as follows. Making sure there is no wire insulation in any terminal another outlet terminal screws are tightened to 35 inch-pounds torque using Electric flat Screwdriver.

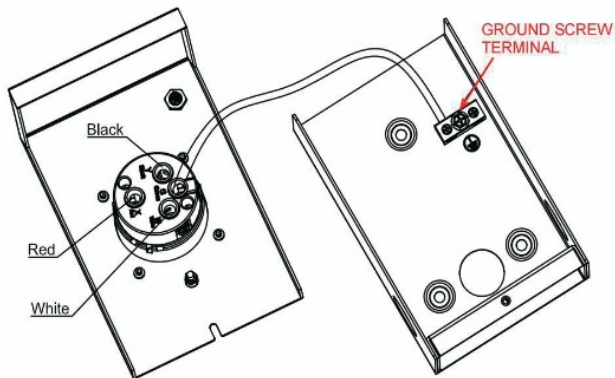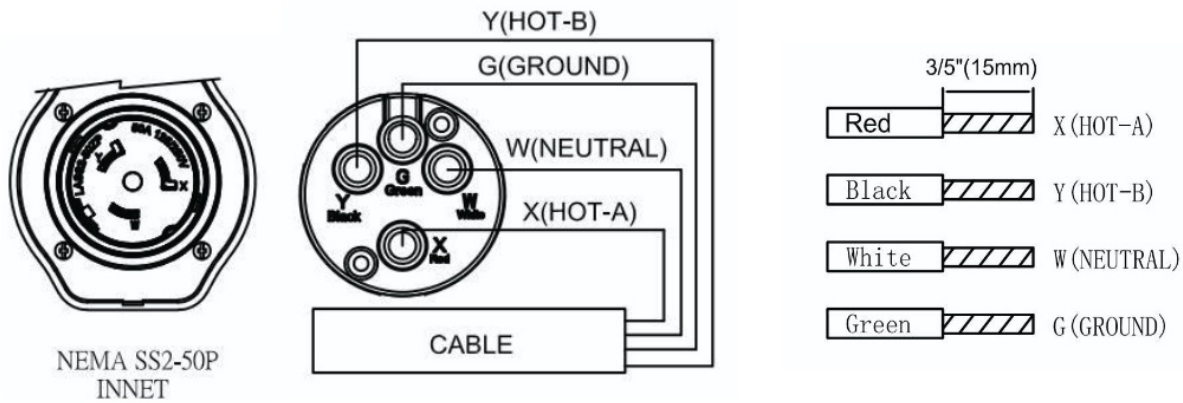

#### Cable Color Scheme:

Black/Red=Load (250 Vlot), the terminals marked "Black" and "Red"

White=W-Neutral Conductor connected to "White" marking terminal

Green=Green power inlet wire to green ground screw terminal on inside of cabinet. If required, green wire to green ground screw terminal on inside of cabinet. (- FIG2)

## Specifications

DESC: 50A 125/250V AC

NEMA: SS2-50P

## One Year Limited Warranty

Supported by our professional R&D team and QC team, we provide One Year Warranty for materials and workmanship from the purchase date. Please note that the warranty does not cover damage caused by personal misuse or improper installation.

Please attach your Order ID and Name so that our dedicated customer service team can help you better.



Made in China




## Contents [ [hide](#) ]

### 1 Documents / Resources

#### 1.1 References

## Documents / Resources

	<a href="#">Jewenwils HGPB50A Generator Inlet Box [pdf]</a> Instruction Manual HGPB50A, HV50107, HGPB50A Generator Inlet Box, HGPB50A, Generator Inlet Box, Inlet Box
---	--

## References

- [User Manual](#)

🔍 Generator Inlet Box, HGPB50A, HGPB50A Generator Inlet Box, HV50107, Inlet Box,

📁 Jewenwils Jewenwils

---

## Leave a comment

Your email address will not be published. Required fields are marked \*

Comment \*

Name

Email

Website

☐ Save my name, email, and website in this browser for the next time I comment.

**Post Comment**

**Search:**

e.g. whirlpool wrf535swhz

**Search**

[Manuals+](#) | [Upload](#) | [Deep Search](#) | [Privacy Policy](#) | [@manuals.plus](#) | [YouTube](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.