

JOYO JW-05R Wireless Audio Interface for Cell Phone Live **Streaming Owner's Manual**

Home » JOYO » JOYO JW-05R Wireless Audio Interface for Cell Phone Live Streaming Owner's Manual





JW-05R Wireless Audio Interface for **Cell Phone Live Streaming Owner's Manual**

Contents

- 1 product introduction
- 2 parameture
- 3 function
- 4 package content
- 5 how to use
- 6 Improtant notes
- 7 Documents /
- Resources
- **8 Related Posts**



Than k you for purchasing our products, please read it carefully before operating.

product introduction

JW-05R features 2.4G wireless system, no need to connect mu (tiple cables during live streaming, you can adjust the frame easily while live streaming. It supports bidirectional transmission, you can live stream or play music via the smart phone.

parameture

Frequency: 2400^-2483.5M Hz

Frequency response:: 20Hz-22kHz+/-ld B

SNR: 90dB

Transmission delay: 9mS Sampling rate: 48KHz

Bit depth: 24 bits

The maximum transmission distance: 15-20m (Barrier-free working distance) 10-15m (Obstacle distance or the

noise is too loud)

Charging Inputvoltage: DC4.8-'-5.4V

Receiver(Lightning port or Type-C port)

With no battery, plug and play, no need to charge


Transmitter

Battery type: lithium battery Built-in battery capacity: \$15mAh 3.7V

Working hour: about 4-5 hrs on a full charge Charging time: about 1 hr(5W1A)


function

Transmitter



- 1. 3.5rnm 4-pole Jack: for csinnecting to amp s analog rive streaming Jack
- 2. Carrimunicatianipowar indkatar: tt flashes in blue when the unit Isturned on but not connected yet, ft's in blue when being connected, ft flashes in red when in low battery. in red when the unit Is being charged, and the red LED goes off once fully charged.
- 3. Power adapter/Pairingbutton:long press it fur2 seconds to turn on/off the unit, double click it tio pair,
- 4. Type-C USB Jack: for charging the transmitter.

Receiver




- 5. US8 Type-C =nectar: for con netting to the cell phone,
- 6. Charging port: It can charge the cell phone when it's in use normally.
- 7. Powerisivial indicator: the LED is flashing in blue when it's turned on but not connected yet, it's in blue when s turned on and connected successfully

package content

- 1. Transmitter
- 2. Recelverx 2
- 3. Type-C charging cable
- 4. Type-C audio conversion line
- 5. Lightningaudio conversion line

how to use


The 1st step: please fully prepared before you use JW-5R for the first time, use the Type-C charging cable to charge the transmitter for about 1hr.

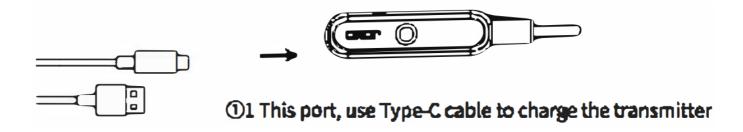

The 2nd, step: connect the receiver to your cell phone, now the LED is flashing in blue.

The 3rd step: press the power indicator for 2 seconds to turn it on, the LED will be flashing in blu e, when the LED of the receiver and transmitter change from purple to blue(in blue), it means they are connected successfully. Then you can turn on cell phone's camera, apps or other devices.

*You can pair up the transmitter and receiver all over again by double clidding transmitter's power indicator.

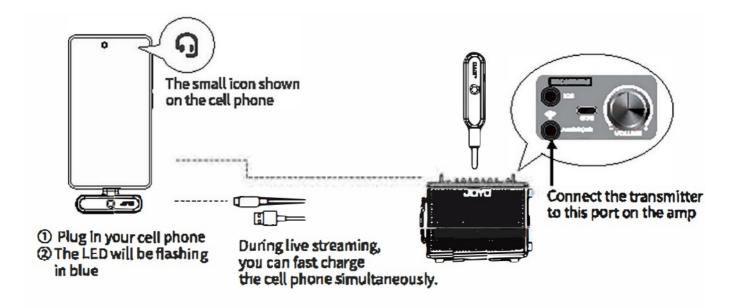

Improtant notes

- 1. Do not disassemble or repair this product by yourself.
- 2. Do not use or store it to any heat sources, damp, dusty areas. Avoid violent vibrations or shock.
- 3. Do not drop this product otherwise it may malfunction.
- 4. Do not use alcohol or othercleaning fluids to clean this product.
- 5. Please make sure the transmitter and the receiver keep a distance away from wireless router or other wireless equipments during use.
- 6. Obstructions between the transmitter and the receiver may affect the transmission distance.
- 7. Due to one of the characteristics of lithium battery, there is a slight self-discharge. Therefore please charge the battery in 2 months so as to avoid low battery protection.
- 8. The lithium battery capacity decreases gradually after repeated charge and discharge, so this product's lifetime will be affected within acceptable degree with time.



TECHNOLOGY C O., LTD Addreas: 2)F, Leah' Indueiry Building, 28th Dletrld, Baden, Shanahan, 518101 China

> www.joyoaudlo.com Emall:info@joyloyoudlo.com. Tel: 0086-755-29765361

Documents / Resources



JOYO JW-05R Wireless Audio Interface for Cell Phone Live Streaming [pdf] Owner's Manu al

2AIN7-JW-05R, 2AIN7JW05R, JW-05R Wireless Audio Interface for Cell Phone Live Streaming, JW-05R, Wireless Audio Interface for Cell Phone Live Streaming, JW-05R Wireless Audio Interface, Wireless Audio Interface, Interface

