



KAGO DP1.4 DP KVM Switcher User Manual

[Home](#) » [KAGO](#) » KAGO DP1.4 DP KVM Switcher User Manual 

KAGO DP1.4 DP KVM Switcher



Contents

- 1 Product parameters and functions
- 2 Hotkey command
- 3 Product diagram
- 4 Product connection diagram
- 5 Installation and safety precautions
- 6 Packing list
- 7 Documents / Resources
 - 7.1 References


Product parameters and functions

DP resolution 7680×4320@60Hz/ Backward compatibility
Support video color format 24 bit/deep color 30 bit, 36 bit
Vertical frequency range BK@60Hz
Support audio format DTS-HD / Dolby-trueHD / LPCM 7.1 DTS/Dolby-AC3/DSD HD(HBR)
Maximum baud rate 600 MHz
Maximum bandwidth 48.0 GBPS
BK Input cable '52m AWG24 HDMI
BK Output cable '52m AWG24 HDMI
USB PC Interface input type..... USB-B
USB Output interface type USB-A
Maximum operating current 500mA
Power DC5V/1A
Operating temperature range (-40 – +85 t:}
Operating humidity range 5 – 90%RH(No condensation)
Size(LxWxH) 138X65X22(mm)
Weight156g


Hotkey command

Home+ Home+ 1/2	Switch to1/2 port
Home+ Home+ Keypad 1/2	Switch to1/2 port
Home + Home + I	Set the waiting time interval for automatic switching
Home + Home + S	Automatic switching on/off
Home + Home + B	Turn the buzzer on/off
Home + Home + ,-/i	Switch to the previous port
Home + Home + L/->	Switch to the next port

Product diagram

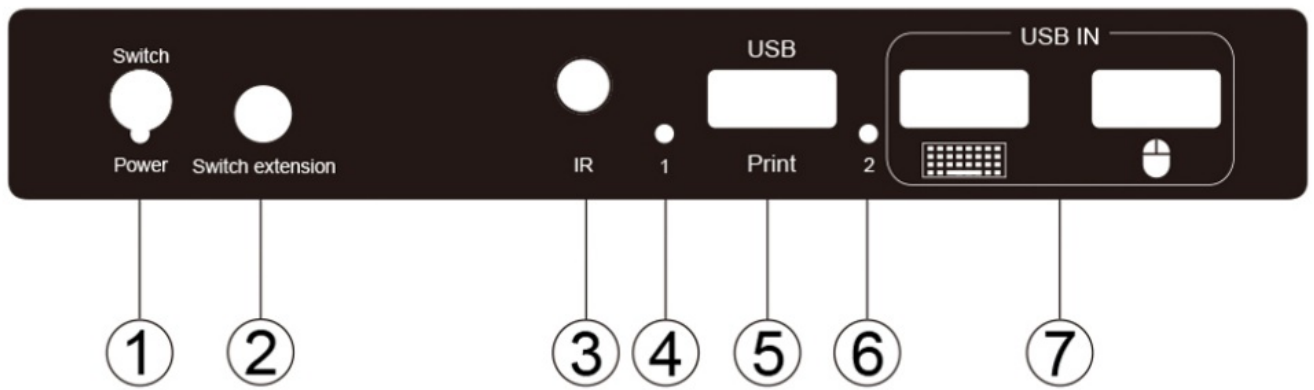


1. Switch port I power indicator
2. Extension key
3. IR
4. PC1 indicator
5. USB port I print port
6. PC2 indicator
7. USB keyboard and mouse input port

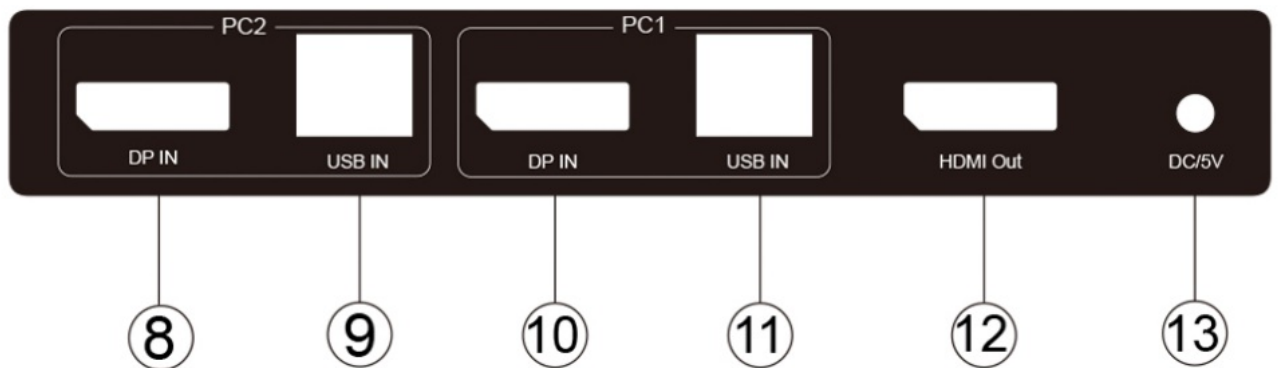

8. DP input port channel 2
9. USB input port channel 2
10. DP input port channel 1
11. USB input port channel 1
12. DP output port
13. DC/5V port

Product connection diagram

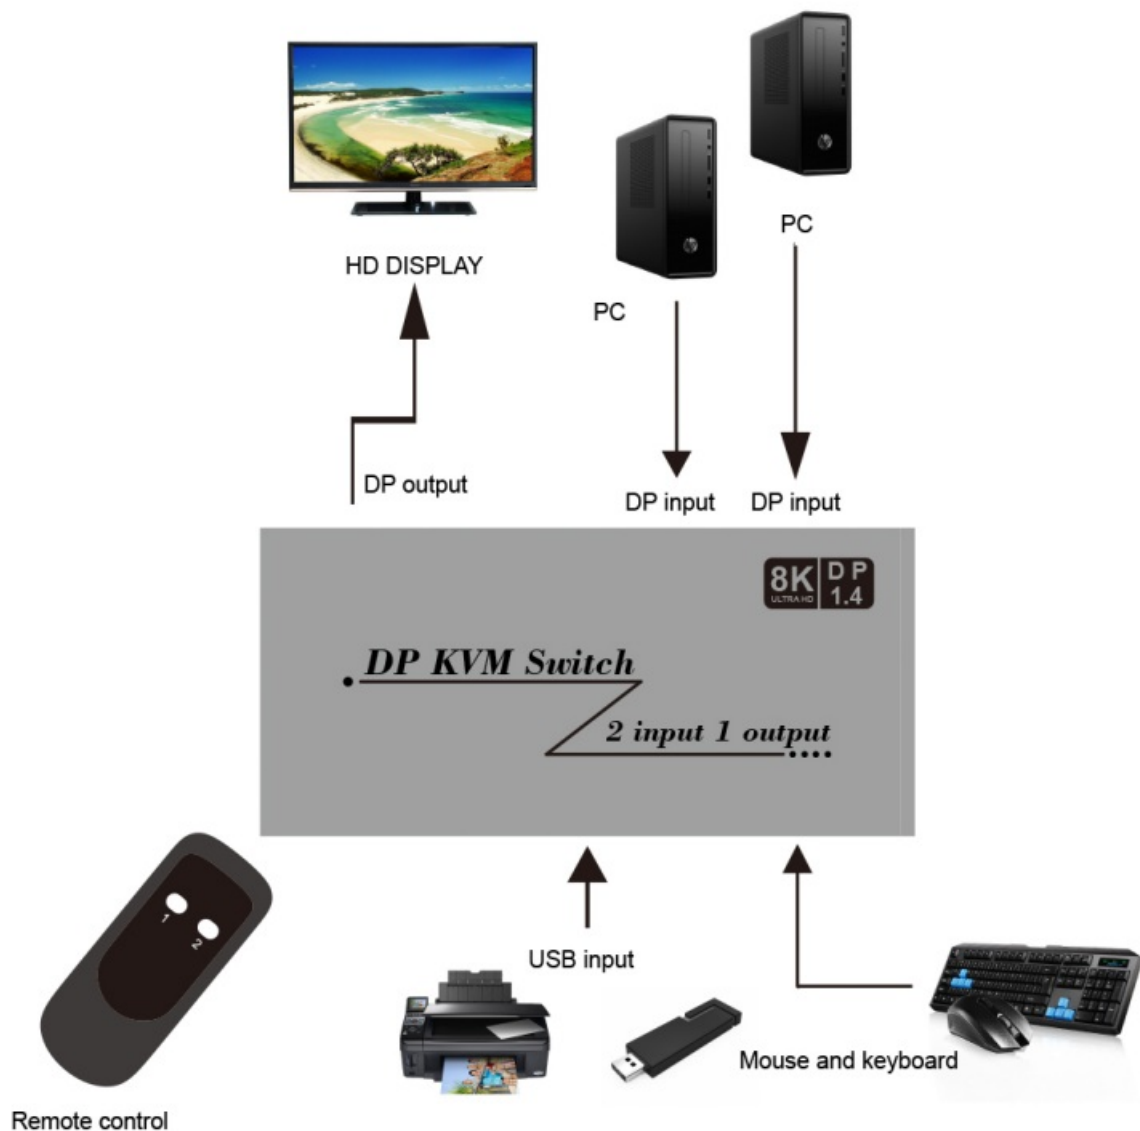

Installation and safety precautions

1. product wires must be in place, not where they are stepped on or touched. Ensure that all cables are fully connected to the plug port
2. To ensure adequate ventilation during use, there are at least 1 inch interlacing devices on each side of the product (except on a flat surface)
3. Do not install this product near water source or in an environment with excessive moisture
4. Place the product on a flat surface and keep it out of reach of children

Packing list

1. KVM switcher x1
2. USB Power line x1
3. The user manual x1
4. USB cable x2
5. Manual switching line x1
6. Remote control x1

Documents / Resources

