



# KASTA 5RSIBH Smart Remote Switch 5-Input Module Instruction Manual

[Home](#) » [KASTA](#) » KASTA 5RSIBH Smart Remote Switch 5-Input Module Instruction Manual 

## Contents

- [1 KASTA 5RSIBH Smart Remote Switch 5-Input Module](#)
- [2 APP Installation](#)
- [3 Important Safety Information](#)
- [4 FEATURES](#)
- [5 FUNCTION SETUP](#)
- [6 APP ENABLED FUNCTION](#)
- [7 TECHNICAL SPECIFICATIONS](#)
- [8 CONNECTION DIAGRAM](#)
- [9 Documents / Resources](#)
  - [9.1 References](#)
- [10 Related Posts](#)



**KASTA 5RSIBH Smart Remote Switch 5-Input Module**



## APP Installation

Visit [www.kasta.com.au](http://www.kasta.com.au) or your app store to download the free KASTA app.

- iOS: requires iOS 9.0 or later.
- Android: requires Android 4.4 or later. Devices must support Bluetooth 4.0



## Important Safety Information

- This product must be installed by a licensed electrician in accordance with all the requirements of AS/NZS 3000 (current edition) and other relevant Standards and Regulations.
- Electricity **MUST** be disconnected prior to installation. Failure to do so may result in serious injury and or loss of life.
- Indoor use only. Not suitable for damp or explosive environments.
- Complies to Australian Standards AS/NZS 60950.1:2015, AS/NZS CISPR 15.
- No user-serviceable parts inside.

## FEATURES

- Mains powered remote switch input module with five separate inputs.
- Pair with and control other KASTA devices.
- Simple 7 wire connection – A, N, S1, S2, S3, S4, S5.

- 2 modes of operation.

### **Mode 1: TOGGLE INPUT**

Wirelessly control KASTA devices, groups and scenes when a toggle/latching output from a PIR sensor is activated. Install in conjunction with a device (e.g. PIR sensor) to terminal S1-5 (default mode).

### **Mode 2: MOMENTARY SWITCH INPUT**

Wirelessly control KASTA Devices, Groups and Scenes from short press or long press of a momentary switch mechanism. Install in conjunction with an appropriately rated momentary action mechanism to S1-5 terminal (select momentary input mode in the KASTA app).

- Can be paired with KASTA devices for multi-way control (8x maximum).
- Built in overvoltage protection.
- To prevent a reduction in Bluetooth® signal strength, install away from metal objects.
- Patent No. 2019101685, 201921256952.4.

## **FUNCTION SETUP**

### **S1, S2, S3, S4, S5 TOGGLE INPUT MODE**

Load output from a PIR sensor will trigger the on/off function of paired KASTA devices.

|                                                                                                                   |                             |
|-------------------------------------------------------------------------------------------------------------------|-----------------------------|
| ON/OFF SWITCH                                                                                                     | 1 CLICK                     |
| Turns device on or off.                                                                                           |                             |
| S1, S2, S3, S4, S5 MOMENTARY SWITCH INPUT MODE                                                                    |                             |
| ON/OFF                                                                                                            | 1 CLICK                     |
| Turns paired device on or off. When paired with a dimmable light, light will adjust to previous brightness level. |                             |
| DIM UP/DOWN                                                                                                       | ONE LONG PRESS              |
| When paired with a light, long press button to dim up or down. Release button to stop.                            |                             |
| FULL BRIGHTNESS                                                                                                   | 2 CLICKS                    |
| When paired with a light, sets lights to full brightness.                                                         |                             |
| DELAY TO OFF                                                                                                      | 3 CLICKS*                   |
| Paired device turns off automatically after a set time (configured in the app). Single click to cancel.           |                             |
| VARIABLE                                                                                                          | 4 CLICKS                    |
| Refer to the paired device for functionality.                                                                     |                             |
| VARIABLE                                                                                                          | 5 CLICKS                    |
| Refer to the paired device for functionality.                                                                     |                             |
| FACTORY RESET                                                                                                     | 9 CLICKS OF 'RESET' BUTTON* |

## APP ENABLED FUNCTION

RETRIGGER TIMER 1 CLICK

Commence time (on/off). Function must be programmed through the KASTA app first.

## TECHNICAL SPECIFICATIONS

---

**Operating Temp:** -20°C to 40°C


---

**Supply:** 220-240V AC 50Hz


---

## CONNECTION DIAGRAM

FUNCTION 1 - TOGGLE INPUT

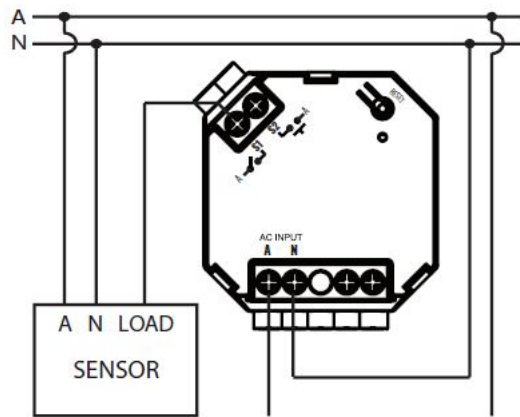

FUNCTION 2 - MOMENTARY SWITCH INPUT

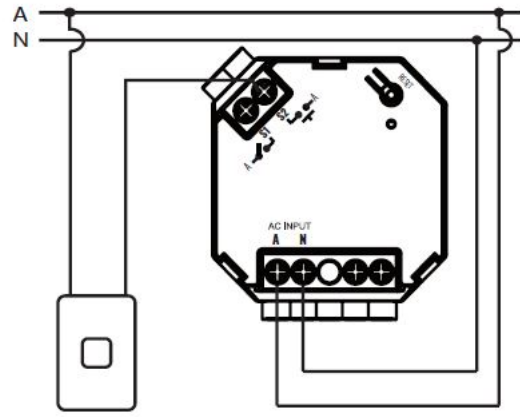

## Documents / Resources

|  |                                                                                                                                                                                                                                                      |
|--|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  | <p><a href="#">KASTA 5RSIBH Smart Remote Switch 5-Input Module</a> [pdf] Instruction Manual 5RSIBH, Smart Remote Switch 5-Input Module, 5-Input Module</p>                                                                                           |
|  | <p><a href="#">KASTA 5RSIBH Smart Remote Switch 5-Input Module</a> [pdf] Instructions 5RSIBH Smart Remote Switch 5-Input Module, 5RSIBH, Smart Remote Switch 5-Input Module, Remote Switch 5-Input Module, Switch 5-Input Module, 5-Input Module</p> |

## References

- [KASTA - Living Enhanced](#)
- [KASTA - Living Enhanced](#)