



Keilton WP1013S Electronic Controller Switch Installation Guide

[Home](#) » [Keilton](#) » Keilton WP1013S Electronic Controller Switch Installation Guide 

Contents

- [1 Keilton WP1013S Electronic Controller Switch](#)
- [2 Product Information](#)
- [3 Product Usage Instructions](#)
- [4 FEATURES](#)
- [5 SPECIFICATIONS](#)
- [6 WIRING](#)
- [7 INSTRUCTIONS](#)
- [8 Electronic Controller Switch](#)
- [9 Documents / Resources](#)

Keilton®

Keilton WP1013S Electronic Controller Switch



Product Information

This device complies with Part 15 of the FCC rules. It is designed to operate without causing harmful interference and is capable of accepting interference from other devices. Any changes or modifications not approved by the responsible party for compliance may void the user's authority to operate the equipment.

The recommended distance between the user and the product should be no less than 20cm.

Product Usage Instructions

1. Reorient the receiving antenna to optimize signal reception.
2. Increase the separation between the equipment and the receiver to minimize interference.
3. Connect the equipment into an outlet on a circuit different from the one to which the receiver is connected. This helps in reducing potential interference.
4. If you require further assistance, consult the dealer or an experienced radio/TV technician.

FEATURES

- Network technology for Bluetooth enabled IOS or Android smartphone. Linkable with light groups.


- Manual On/Off & Dim control of any connected load through traveler wire. Compatible with Keilton devices.
- Type of Action: Type 1 Action
- Pollution Degree: 2
- Rated Impulse Voltage: 4000 V

SPECIFICATIONS

- **Voltage:** 120/277VAC,50/60Hz
- **Current:** 10mA Max
- **Wire Strip Length:** 16mm(5/8 in.)
- **Transmit Line Distance:** 100ft
- **Operating Temperature:** 32°F-104°F

WIRING


1. Remove wall plate, and switch mounting screws.
2. Carefully remove the switch from the switch box. DO NOT disconnect the wires.
3. There are three wiring connections on the switch, these are marked HOT, NEUTRAL, GROUND.
4. Disconnect the wires from the existing switch
5. Connect the green wire to the GROUND terminal.
6. Connect the white wire to the terminal marked NEUTRAL.
7. Connect the black wire to the terminal marked HOT.
8. Check connections to be sure they are tight and no bare conductors are exposed.
9. Insert the switch into the outlet box carefully.
10. Make sure the switch is in the box using the supplied screws.
11. Attach the wall plate.
12. Restore power to the circuit breaker and test the system.

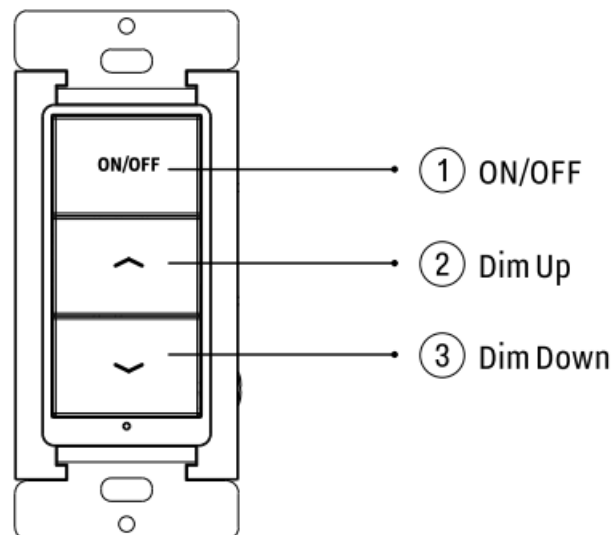

- Wire Strip Length; 16 mm (5/8 in.)
- The device shall install in a standard outlet box.

TIPS: This Bluetooth device is compatible with the Keilton lighting control system only.

INSTRUCTIONS

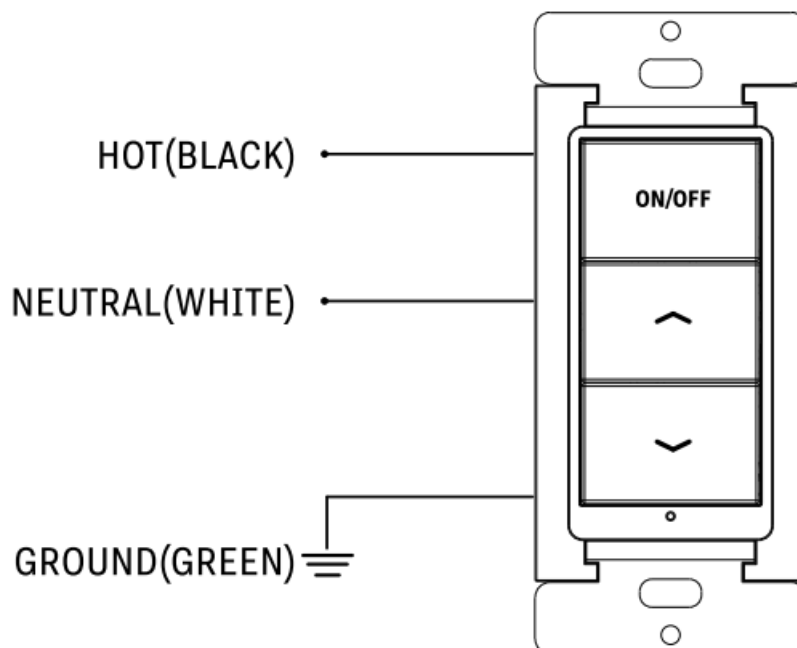

- Follow the instruction to connect Bluetooth Wall Switch to the lights.
- Press button (j) and® to gether over 3 seconds to enter pairing mode and achieve reset function. This switch can be scanned in next 30 seconds.
- In Keilton App “Switch” page, click to add the switch.
- Select the light/light group to be controlled by this switch.
- Detail operation please refer Keilton APP instruction.

Electronic Controller Switch

How to Install Keilton APP?

Scan below QR code for downloading the APP.



How to Control Lights with a Phone?

Scan to download Keilton APP instruction



WARRANTY INFORMATION

Our company warrants this product to be free of defects in materials and workmanship for a period of five (5) years. There are no obligations or liabilities on the part of our company for consequential damages arising out of, or in connection with, the use or performance of this product or other indirect damages with respect to loss of property, revenue or profit, or cost of removal, installation or reinstallation.


Contact: sales@litetrace.com

This device complies with Part 15 of the FCC rules. Operation is subject to the following two conditions: 1) this device may not cause harmful interference, and 2) this device must accept any interference received, including interference that may cause undesired operation. This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try correct the interference by one or more of the following measures:

- Reorient the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Changes or modifications not expressly approved by the party responsible for compliance could void your authority to operate the equipment. The distance between user and products should be no less than 20cm

Documents / Resources

| | |
|---|---|
|  | <p>Keilton WP1013S Electronic Controller Switch [pdf] Installation Guide WP1013S, 2A26YWP1013S, WP1013S Electronic Controller Switch, Electronic Controller Switch, Controller Switch, Switch</p> |
|---|---|