

kramer MTX3 Modular Matrix Card Installation Guide

Home » Kramer » kramer MTX3 Modular Matrix Card Installation Guide 1

Contents

- 1 kramer MTX3 Modular Matrix Card
- **2 Product Information**
- 3 Check what's in the box
- 4 Install a matrix card
- 5 Documents / Resources
 - **5.1 References**



kramer MTX3 Modular Matrix Card



Product Information

The MTX3 Modular Matrix Card is a device used for installing input and output cards in a modular matrix system. It allows for the expansion and customization of audio and video signal routing within a system.

Check what's in the box

· MTX3 Modular Matrix Card


Get to know your Modular Matrix Card

The attached card mounts in one of the slots on the rear of the chassis:

- In MTX3-16-M, matrix cards are installed horizontally, and slots are numbered from top to bottom (1 to 8 and 9 to 16).
- In MTX3-34-M, matrix cards are installed vertically, and slots are numbered from left to right (1 to 34). Input and output cards may be mounted in any slot.

Install a matrix card

To install a matrix card to the MTX3 Modular Matrix Card (as shown in the example below):

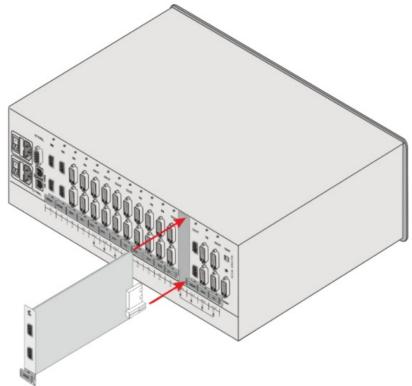

- 1. Power off the machine and all devices connected to it.
- 2. Using a Phillips screwdriver, loosen the screws at the top and bottom (or sideways) of a blank plate.
- 3. Remove the blank plate from the slot and store it for possible future use.
- 4. Remove the new card from its shipping box and anti-ESD bag.
- 5. Holding the card by the lower handle, align the card with the plastic guide rails (vertical or horizontal).
- 6. Slide the card into the chassis until the front of the card contacts the connector inside the chassis.
- 7. Press the card firmly into the slot until the connector plate is flush with the rear panel of the chassis and the connector is fully seated.
- 8. Using a Phillips screwdriver, tighten the retaining screws at the top and bottom of the card to secure it to the chassis.
- 9. Power on the machine and follow the procedure in the user manual to configure the new card.
- 10. Power on the peripheral devices.

For optimum range and performance use the recommended Kramer cables available at www.kramerav.com. Using third-party cables may cause damage!

Safety Instructions

- Caution: There are no operator serviceable parts inside the unit.
- Warning: Use only the power cord that is supplied with the unit.
- Warning: Do not open the unit. High voltages can cause electrical shock! Servicing by qualified personnel only.
- Warning: Disconnect the power and unplug the unit from the wall before installing.

Scan for full manual:



kramerav.com

Documents / Resources



kramer MTX3 Modular Matrix Card [pdf] Installation Guide MTX3 Modular Matrix Card, MTX3, Modular Matrix Card, Matrix Card, Card

References

Manuals+,