


LAMPICK
DU-F07W Smart
Automatic Cat Feeder



LAMPICK DU-F07W Smart Automatic Cat Feeder Instruction Manual

[Home](#) » [LAMPICK](#) » LAMPICK DU-F07W Smart Automatic Cat Feeder Instruction Manual 

Contents

- 1 LAMPICK DU-F07W Smart Automatic Cat Feeder
- 2 Product Usage Instructions
- 3 IMPORTANT SAFEGUARDS
- 4 PACKING LIST
- 5 PRODUCT IMAGE
- 6 Installation Guide
- 7 INSTRUCTIONS
- 8 SMART LIFE APP-SPECIFIC OPERATIONS
- 9 SIMPLE TROUBLESHOOTING
- 10 CLEANING INSTRUCTIONS
- 11 FAQ
- 12 Documents / Resources
 - 12.1 References



LAMPICK DU-F07W Smart Automatic Cat Feeder



Specifications

- **Main Unit**
- **Accessories:** Food Tank Lid, Food Tank, Grain Bucket Rotor, Food Bowl, Power Cord, User Manual

Product Information

The Automatic Pet Feeder is designed to provide convenient feeding solutions for your pets. With a user-friendly interface and smart features, it ensures your pets are fed on time even when you're away.

Product Usage Instructions

Installation Guide

1. Install Grain Bucket Rotor: Place the grain bucket rotor into the base of the main unit.
2. Install Food Tank: Align the large and small ports on the food tank with the corresponding serial number position on the main unit.
3. Install Food Tank Lid: Secure the food tank lid by aligning it with the buckle track and turning it clockwise until it clicks into place.
4. Place the feeder base on a level surface with the food bowl attached to the base.

Key Description

- **Feed/Unlock button:** Press once to feed your pet. Long press to unlock or reset the device.
- **Reset:** Long press to clear all data and restore factory settings.

Indicator Light Information

Indicator light color	Indicator light signal	Equipment status
White	Flashing Ever-bright	In the process of network distribution
Fast flashing Red	Slow flashing	Network connection successful
—	—	Software upgrade exception
—	—	Low battery/Motor stalled

IMPORTANT SAFEGUARDS

Safety Instruction

1. Children must be accompanied by adults to use it.
2. Do not use the feeder for pets who cannot reach the food tray or have physical disabilities.
3. Do not immerse the base part in water, which will damage electronic components such as control panel.
4. Do not place any foreign objects into the pet feeder.
5. Do not put canned or wet food into the feeder.
6. Do not disassemble the equipment by yourself.
7. Do not modify the pet feeder.
8. If the equipment malfunctions or parts are damaged, do not repair the pet feeder by yourself, contact your seller immediately to solve the problem.
9. Be sure to unplug the product when not in use or before cleaning it.
10. If the equipment's power plug becomes wet, turn off the power at the outlet and do not attempt to unplug it.

Notice

1. Please purchase hard plastic protector from hardware store to protect plugs and power cord then prevent your pet from damaging the accessories.
2. Do not put the pet feeder in an high temperature place. The temperature should be within the range of 0 °C~40 °C.
3. Please use alkaline Size D battery for power supply. Do not use rechargeable batteries.
4. Check the battery regularly. be sure to replace the battery if you are traveling or on business.
5. Do not lift the pet feeder directly with the cover, food bucket and food tray. Hold the base with both hands to lift and carry, while keeping the device in an upright position.
6. Only applicable to dry food with a diameter of 3-10mm. Larger foods may become stuck or block the food outlet.
7. Please read and follow all important instructions listed on the pet feeder and packaging carefully.


PACKING LIST

After opening the product package, please confirm whether the machine is in good condition. Please check the list to confirm whether the accessories are complete.

Main Unit



Accessories




1 Food Tank Lid




2 Food Tank



3 Grain Bucket Roto



4 Food Bowl




5 Power Cord




6 User Manual

PRODUCT IMAGE

Front view

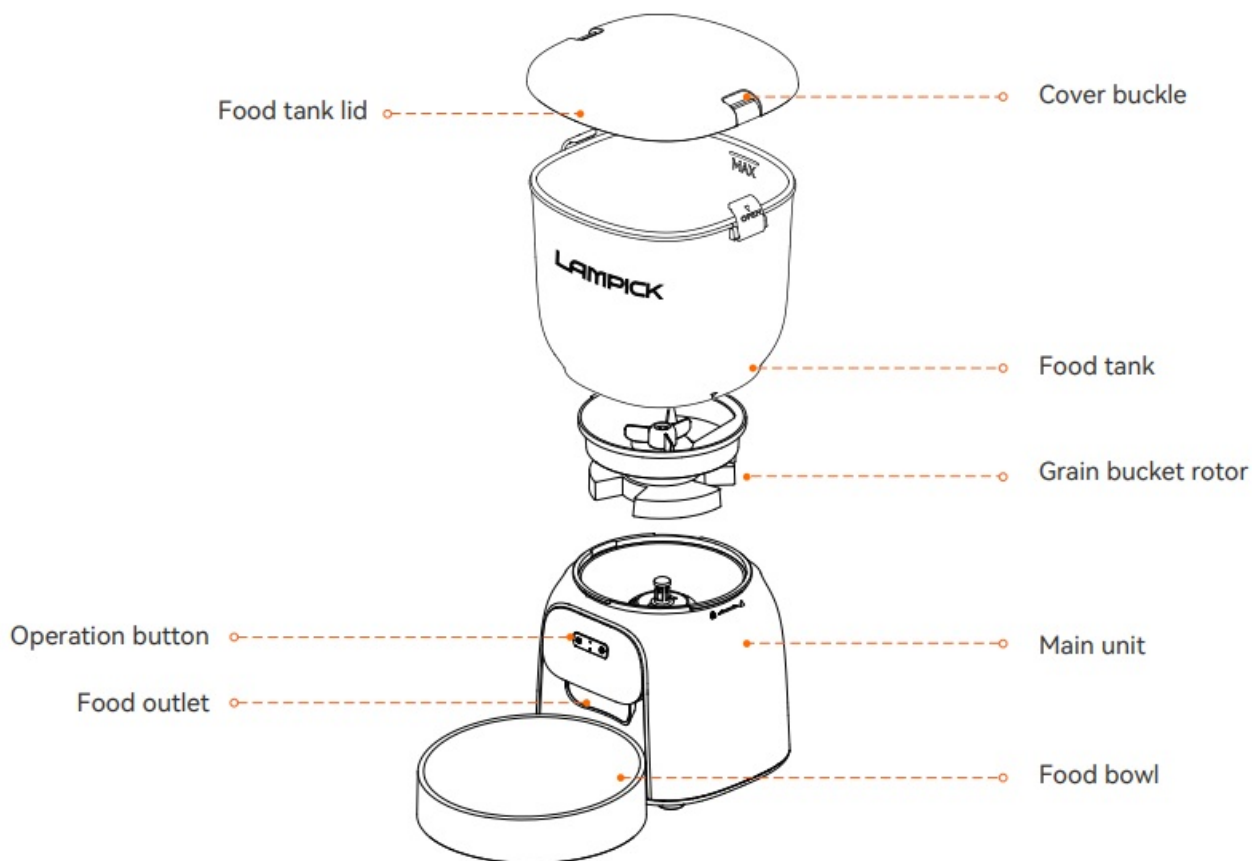

Bottom view

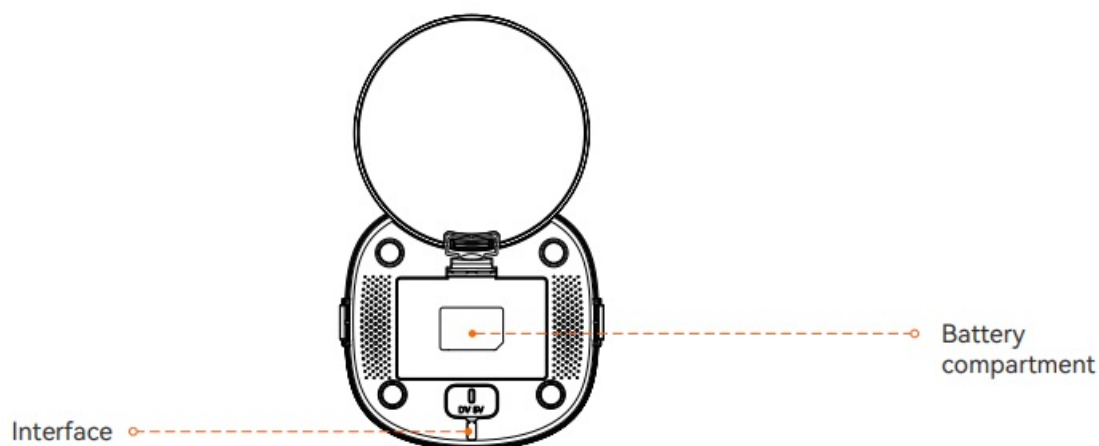

Installation Guide

1. Install Grain Bucket Rotor

Please put the grain bucket rotor into the base of the main unit correctly as shown.


2. Install Food Tank

1. Pay attention to the large (A) and small (B) alignment ports, and place them in the corresponding serial number position of the main unit.
2. Put the food tank into the corresponding buckle track as shown, align with the mark , and turn clockwise from ① to ② until you hear a click and tighten. After this installation is completed, confirm again that the tightening is not loose.


3. Install Food Tank Lid

Pick up the food tank lid with both hands, align it downward at the food tank buckle and fasten the buckles on both sides to finish.



(1) Install Grain Bucket Rotor

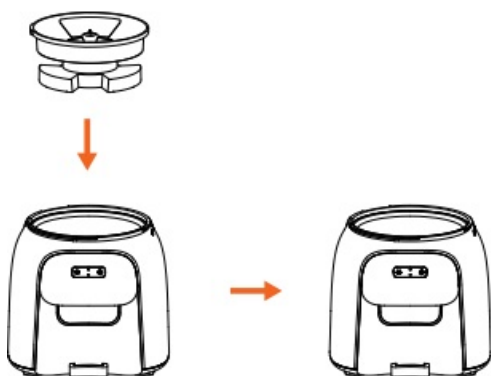


(2) Install Food Tank

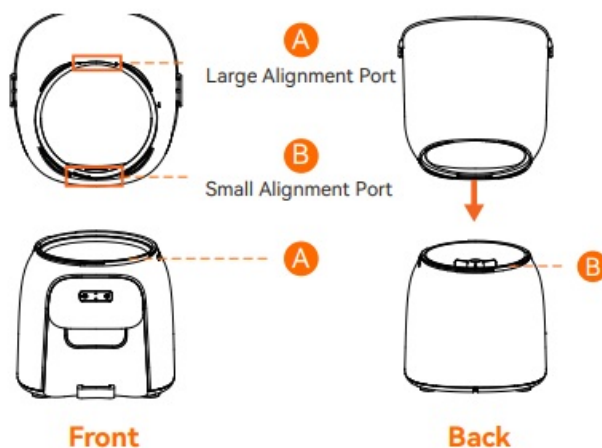


(3) Install Food Tank Lid

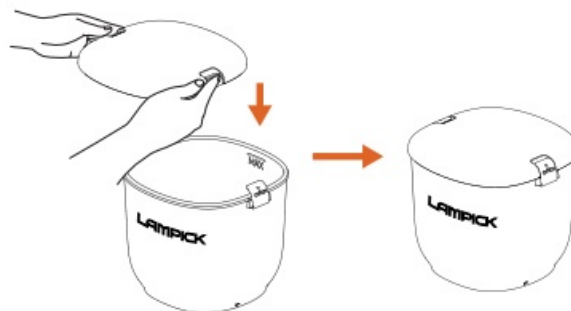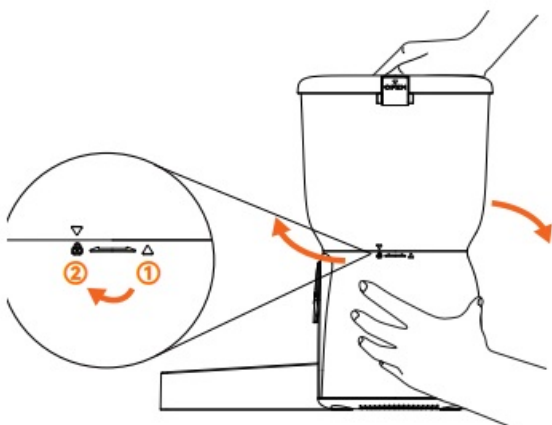

4. Place the feeder base on a level surface with the food bowl stuck to the base.

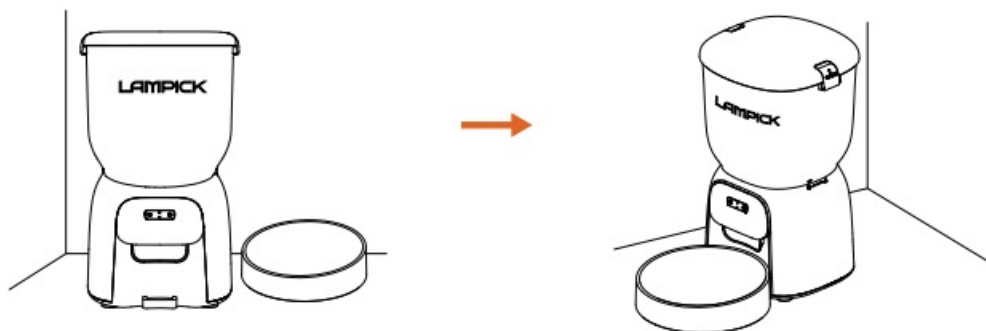

Key Description






- **Feed/Unlock button:**

- **Feeding function:** press once to feed once.
- **Unlocking function:** When there is no operation on the button for 30 seconds, the button will be locked with a beep sound. Press and hold the button again for 3 seconds with two beep beep sounds to unlock it.



- **Reset:** In the unlocked state, long press  to clear all data. A “di” sound will be heard in 6 seconds, and the device will be restored to factory settings, network configuration information, feeding plan, feeding records, etc.

Note

1. The key is automatically locked after 30 seconds of no operation.
2. Key use is only effective when the key is unlocked.

Indicator light color	Indicator light signal	Equipment status
	Flashing	In the process of network distribution
White	Ever-bright	Network connection successful
	Fast flashing	Software upgrade exception
Red	Slow flashing	Low battery/Motor stalled

Note

When the equipment fails (low battery, motor blockage, insufficient grain residue, clogged grain outlet) App pushes exception alerts

Description of Low Power Consumption

1. When the feeder is not connected to a power source, it is battery powered by default. If you need to use it unplugged, please make sure that you have installed batteries as required.
2. When the feeder is battery-powered, the power is limited, in order to ensure that the feeder has a long life and does not interfere with feeding, the feeder continues to enter the low-power mode after 30s of no operation, it will not support the remote control of the App, but the feeding results and the status of the feeder continue to be displayed.
3. If you need to use the App function, please connect the power cord and use it after successful network distribution.

INSTRUCTIONS


Installation

Complete assembly according to the steps.



Connect the power supply

- Plug the 5V/1A power adapter into the wall socket and connect the device.
- After plugging in, the bottom of the equipment is a rocker switch, which needs to turn on, and the LED light will light up, indicating that the feeder is powered on.
- Open the battery compartment at the bottom of the feeder and install 3 pcs Size D Battery (not necessary) to prevent power failure

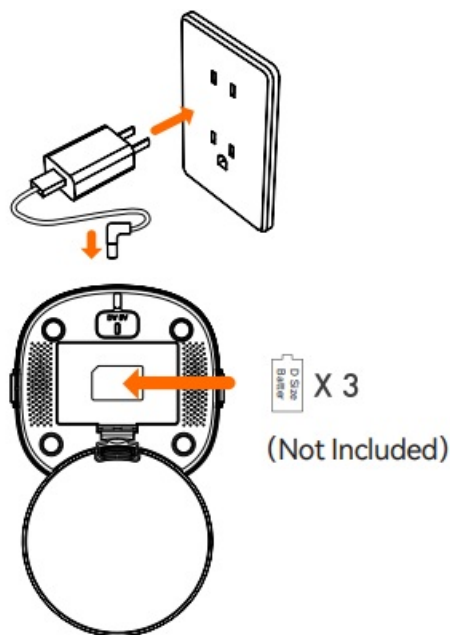

Note:

1. Does not including battery.
2. Before turning on the power, make sure that all parts

Put pet food in the food tank

- Open the top cover by pressing and holding the open button on both sides to break it outward;
- Pour in dry pet food;

- Close the lid and press the snaps on both sides to secure it.




Note

1. Do not place canned, wet or wet pet food.
2. The recommended pet food size range is 3-10 mm.

Lock/Unlock

Press the key for 30 seconds without operation, the key will be locked with a “di” sound, press and hold again for 3 seconds, the key will be unlocked with two “di”.

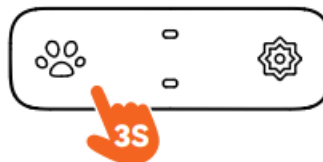


Attention:

1. Any button cannot be operated in the locked state, and it must be unlocked to be used normally.
2. The locked state does not affect the operation of the App.

Feed

Manual feeding: 1 portion of food is dispensed with a short press.

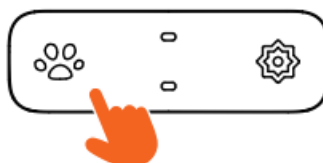


Attention:

1. Please unlock the device before feeding.

2. Feeding schedule will not be affected.




Reset

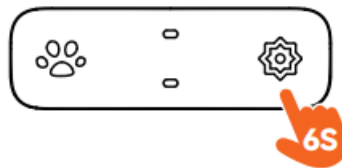




- In the unlocked state, press and hold for 6 seconds to make a “di” sound, and the device will restore the factory settings, network information, feeding schedule, feeding records, etc.
- The network can be reconfigured after reset.

SMART LIFE APP-SPECIFIC OPERATIONS




1. Scan the QR code to download the exclusive APP to register an account and log in.
2. Enter the main interface of APP and add devices.
3. Open the Bluetooth of your cell phone and allow permission, enter the interface, wait for the automatic discovery of the device, click “Add”.

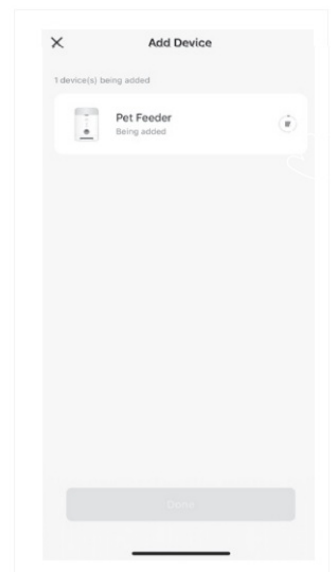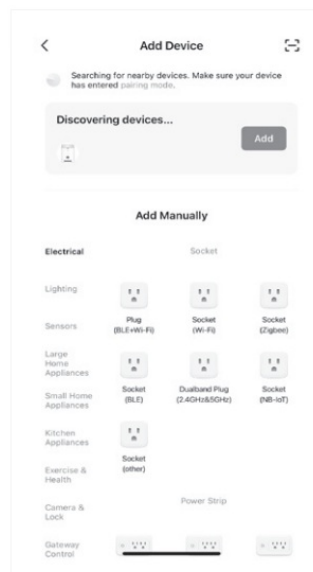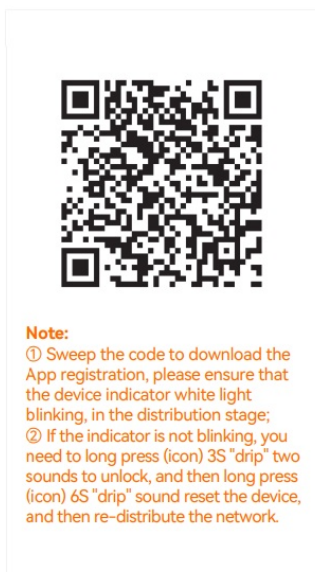




4. Enter the Wi-Fi password (the name can not use Chinese, the password can not use special symbols)
5. Wait for the device to connect to the network, it shows that the device has been added successfully, tap Next.
6. Add successfully, you can customize the device nickname, click the upper right corner to finish!

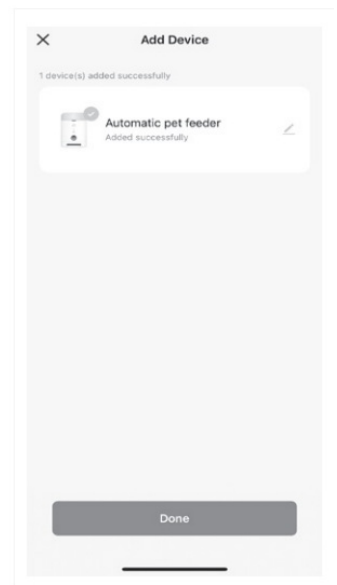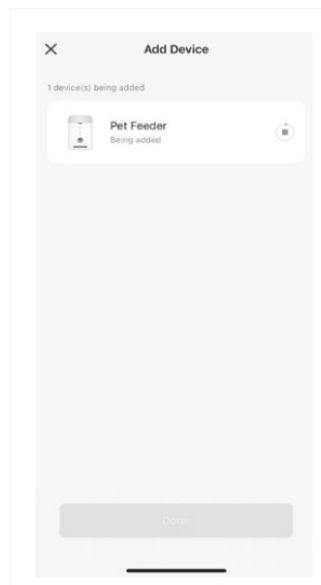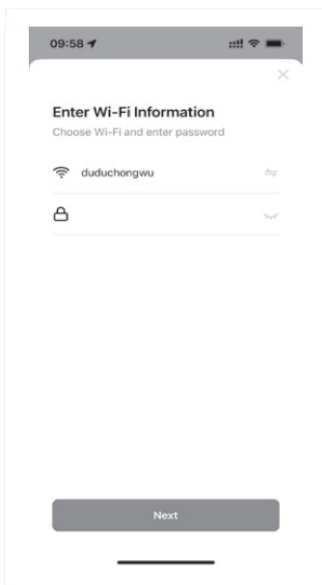

7. On the home page, you can choose the number of servings according to your needs, and tap “Feed” to feed immediately.
8. Tap “Feeding Plan” in the home page to add regular feeding.
9. You can set the time and number of servings according to your pet’s eating pattern, set it to every day from Monday to Sunday, and then tap “Save” to save it.

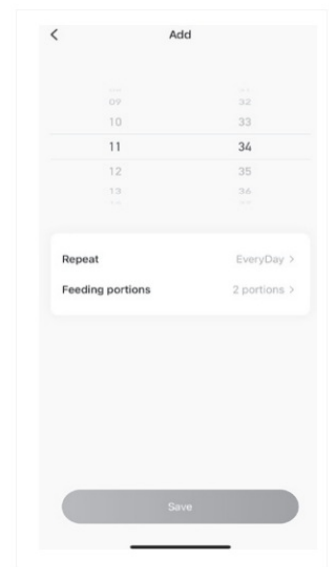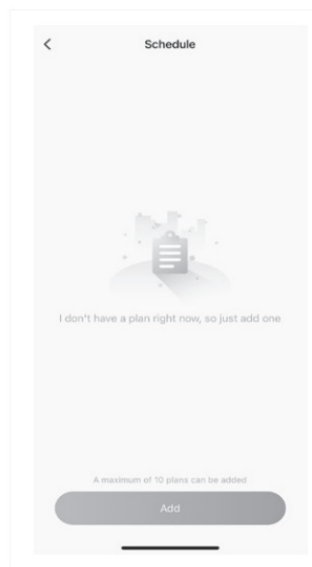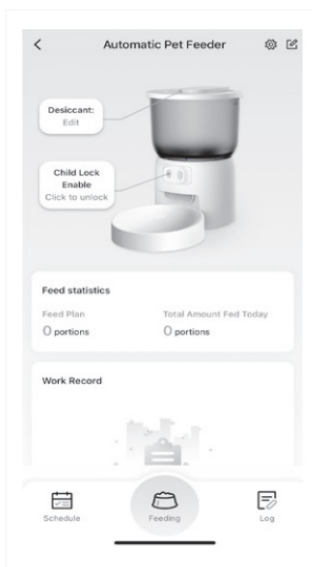


10. Customize the number of servings, the maximum number of servings can be set to 15 powder.
11. Enter the setting options, you can turn on or off the auto-lock, check other basic functions.
12. Tap Settings to share devices, remove devices, check network and other functions.

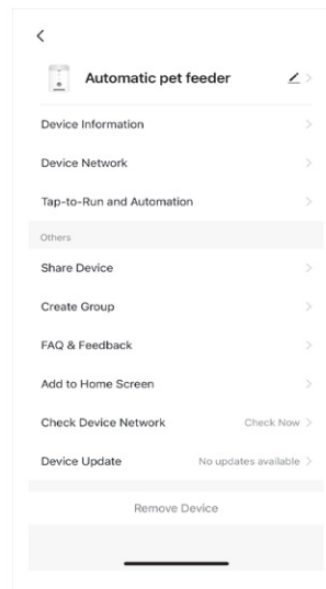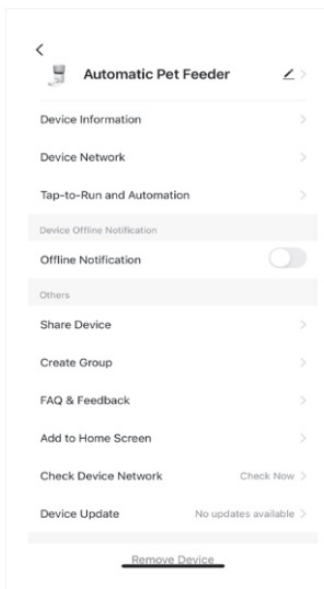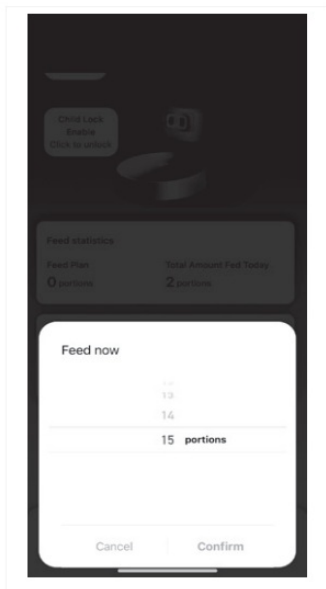

SIMPLE TROUBLESHOOTING

Programs for problem solving

I press any button without a response

The key will be locked automatically when there is no operation for 30 seconds, please press and hold  for 3 seconds to unlock the key.

The App can't connect to the feeder

1. Please check if the Wi-Fi name and password are in Chinese or longer than 12 digits, and make sure the Wi-Fi type is 2.4G.
2. Please restart your phone, close the non-system software that starts automatically on boot, turn on the Bluetooth and positioning of your phone, and try to reconnect again.

The feeder does not dispense food properly or does not dispense food at all

Please check if there is too much grain in the food bowl or if it causes blockage of the grain passage, if so, please clean the grain passage and the grain outlet in time; when using battery power, please check if the battery is dead and if the battery is leaking.

Feeder display offline

Please check whether the distance of the feeder from your home router is more than 10 meters (effective distance of 10 meters); try not to separate walls in the middle, according to the characteristics of Wi-Fi, the Wi-Fi signal across the wall will drop sharply, and the connection appears to be unstable, which will lead to the device offline.

No response to power on


Please make sure the power is plugged in. If the check is correct and the device still does not power on normally, please contact your dealer or customer service in time.

CLEANING INSTRUCTIONS

Follow the steps to create a cleaning chart

1. Remove the top cover and empty the grain drum of grain (make sure)
2. Grasp the grain barrel by hand, hold the base and rotate it counterclockwise to remove the barrel
3. Remove the bottom of the grain barrel
4. Please empty the food tray and remove the food tray
5. Rinse in water or with food-grade detergent and air dry
6. The base of the main unit can be wiped with a damp towel, do not rinse with water


(1)

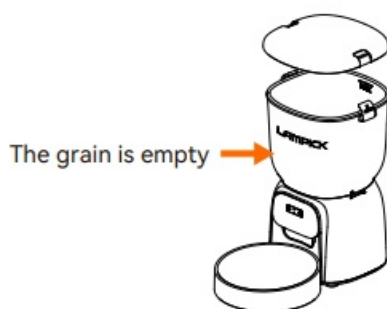

(2)



(3)



(4)



(5)



(6)



CUSTOMER SERVICE

- Thank you for choosing LAMPICK Pet Feeder and becoming part of our family. In order to ensure that you and your pet have a pleasant experience, we have been committed to providing high-quality products and excellent after-sales service.
- We are deeply honored during your purchase of LAMPICK pet feeder. Your choice is not only trust in our products, but also recognition of the unremitting efforts of our team. We will do our best to ensure your pet has a safe, convenient and efficient feeding experience.
- In order to allow you to better use the LAMPICK pet feeder, we provide detailed instructions, including usage methods, precautions, etc. At the same time, if you encounter any problems or have any questions during use, our after-sales team will be at your disposal to provide support and assistance. You can contact us through our customer service hotline or email, and we will reply and solve your problem as soon as possible.

- Thank you again for choosing LAMPICK Pet Feeder, we look forward to providing you and your pets with the best service. We wish you and your pet family good health and happiness!

CONTACT

- 1-[888-980-9883](tel:888-980-9883)
- support@lampickhome.com
- www.lampickhome.com

FAQ

Q: How do I clean and maintain the Automatic Pet Feeder?

A: To clean the feeder, disconnect it from power, remove any remaining food, and use a damp cloth to wipe down the components. Regular maintenance includes checking for blockages and ensuring all parts are functioning properly.



Q: How can I troubleshoot issues with the feeder?

A: Refer to the troubleshooting section in the user manual for common issues and solutions. If problems persist, contact customer service for assistance.

Will there be ants crawling into the food barrel at the food outlet of the pet feeder?

The pet feeder has a sealing ring to protect it from other small animals.

Documents / Resources

	<p>LAMPICK DU-F07W Smart Automatic Cat Feeder [pdf] Instruction Manual DU-F07W, F07W-Product Manual-1, DU-F07W Smart Automatic Cat Feeder, DU-F07W, Smart Automatic Cat Feeder, Automatic Cat Feeder, Cat Feeder, Feeder</p>
	<p>LAMPICK DU-F07W Smart Automatic Cat Feeder [pdf] User Guide BDD0129-130, DU-F07W Smart Automatic Cat Feeder, DU-F07W, Smart Automatic Cat Feeder, Automatic Cat Feeder, Cat Feeder, Feeder</p>

References

- [Lampick - Enjoy Smart and Healthy Life – Lampickhome.com](http://www.lampickhome.com)
- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.