



DL-6-15DCF Led Disk Light Instruction Manual

[Home](#) » [LED DISK LIGHT](#) » DL-6-15DCF Led Disk Light Instruction Manual 

DL-6-15DCF Led Disk Light Instruction Manual



Contents

- [1 IMPORTANT SAFETY INSTRUCTIONS](#)
- [2 TOOLS AND MATERIALS REQUIRED:](#)
- [3 INSTALLATION](#)
- [4 Documents / Resources](#)


IMPORTANT SAFETY INSTRUCTIONS




SAVE THESE INSTRUCTIONS

TOOLS AND MATERIALS REQUIRED:

- Phillips Screwdriver

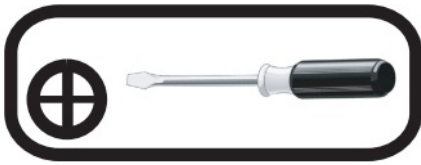

- Wire Cutters

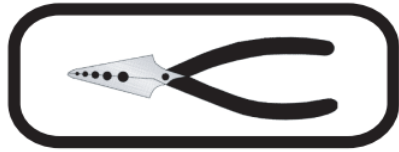

- Pliers



- Wrench



Wiring supplies as required by local electrical code


WARNING

1. READ ALL INSTRUCTION BEFORE INSTALLATION.
2. SYSTEM IS INTENDED FOR INSTALLATION BY A QUALIFIED ELECTRICIAN IN ACCORDANCE WITH THE NATIONAL ELECTRICAL CODE AND LOCAL REGULATIONS.
3. GO TO THE MAIN FUSE BOX, OR CIRCUIT BREAKER. PLACE THE MAIN POWER SWITCH IN THE "OFF" POSITION AND UNSCREW THE FUSE(S) OR SWITCH "OFF" THE CIRCUIT BREAKER SWITCH(ES) THAT CONTROL THE POWER TO THE FIXTURE OR ROOM THAT YOU ARE WORKING ON.
4. PLACE THE WALL SWITCH IN THE "OFF" POSITION.
5. SUPPLY CONDUCTORS (POWER WIRES) CONNECTING THE FIXTURE MUST BE RATED MINIMUM 90°C. IF UNCERTAIN, CONSULT AN ELECTRICIAN.

CAUTIONS

1. THESE LUMINAIRES (FIXTURES) ARE DESIGNED TO MEET THE LATEST NEC REQUIREMENTS AND ARE LISTED IN FULL COMPLIANCE WITH ETL LIST.
2. BEFORE ATTEMPTING INSTALLATION, CHECK YOUR LOCAL ELECTRICAL CODE, AS IT SETS THE WIRING STANDARDS FOR YOUR LOCALITY.

INSTALLATION

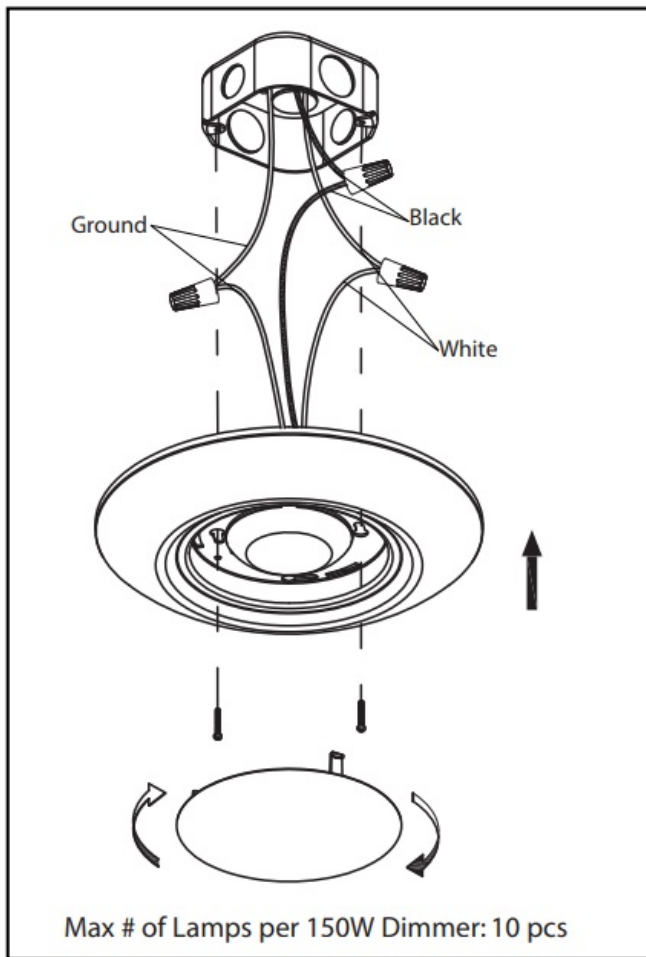

Over standard electrical junction box

1. Provide electrical service according to the "National Electrical Code" or your local electrical code to the outlet box.
2. Connect supply wires to fixture wires and insulate with proper size wire nuts
3. Connect incoming ground wire (green or bare) to fixture ground wire (green or bare).
4. Connect incoming common (white) wire to fixture white wire.
5. Connect incoming hot (typically black) wire to fixture black wire.
6. Twist the lens anticlockwise to open the fixture.
7. Raise the disc light to the junction box. Tighten screws to firmly hold the fixture in place.
8. Twist the lens clockwise on disk light metal enclosure and lock the lens in place.

Compatible wall dimmers : LEVITON# 742-6672-HLW
LEVITON# 722-6674-PDW , LUTRON# SCL-153PH-WH

Imported By: 2157 Parkedale Ave., Brockville, Ontario, K6V 5V6, Tel: (613) 342-5424, Fax: (800) 263-4598

Documents / Resources

