



legrand Adrone WNAL63 Wireless Smart Dimmer with Netatmo Instruction Manual

[Home](#) » [Legrand](#) » legrand Adrone WNAL63 Wireless Smart Dimmer with Netatmo Instruction Manual



No: 341335 - 05/21

Contents [[hide](#)]

- [1 adorne™](#)
- [2 Documents / Resources](#)
- [3 Related Posts](#)


adore™

WNAL63 Wireless Smart Dimmer with Netatmo

Installation Instructions


Catalog Number(s): WNAL63

Country of Origin: Made in China

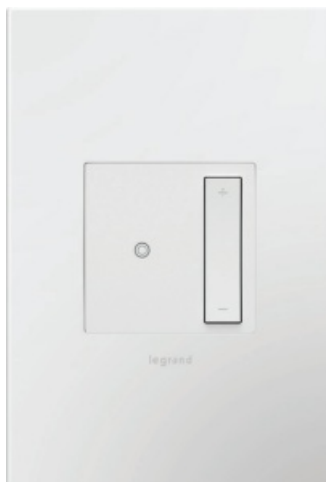

WNAL63
Wireless Smart Dimmer

Wall plate sold separately

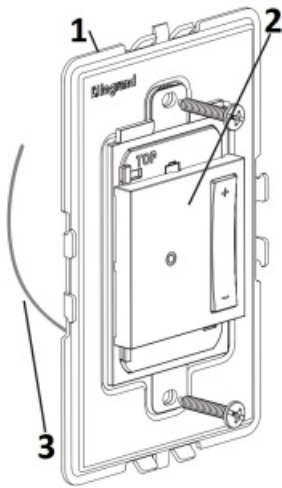

1. Frame
2. Wireless Smart Dimmer
3. Ground Wire



1. Wall Plate

REGULATORY INFORMATION

FCC NOTICE: This device complies with Part 15 of the FCC rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesirable operation.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna
- Increase the separation between the equipment and receiver
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected
- Consult the dealer or an experienced radio/TV technician for help

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with a minimum distance of 90 mm between the transmitter's

radiating structure(s) and the body of the user or nearby persons.

NOTE: Any changes or modifications to this device that are not expressly approved by the manufacturer will void the warranty and the user's authority to operate the equipment.

Contains FCC ID: 2AU5D-ASWDM

IC NOTICE: This device complies with Industry Canada license-exempt RSS standards. Operation is subject to the following two conditions: (1) this device may not cause interference; and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

RF EXPOSURE STATEMENT: This equipment meets the SAR evaluation limits given in RSS-102 Issue 5 requirements at the minimum separation distance of 90 mm to the human body. Note: Any changes or modifications to this device that are not expressly approved by the manufacturer, will void the warranty and the user's authority to operate the equipment.

IC: 25764-ASWDM

HVIN: WNAL63

For more information and helpful how-to videos, visit www.adornemyhome.com/install.

INSTALLATION INSTRUCTIONS

Please read these instructions completely before you begin. This **adorne™** wireless dimmer remote is designed for installation in standard electrical boxes. However, some of the installation methods vary slightly from traditional methods. If you do not understand these instructions or are unsure of your abilities, seek the assistance of a qualified electrician.

Use only with Legrand adorne™ system.

1

Choose a place to install the Device


For indoor installation only. This device can be installed in any standard electrical wall box of any gang size, or on any flat wall surface.

2

NOTE: Skip section 2, if installing in an electrical box.

Wall Surface Installation

Use provided double sided stickers to install on a tiled or other smooth surface. Markings on the back of the device indicate location for the stickers. If the wall surface is uneven or rough where the adhesive may not work, use drywall screws if going on a wall stud or drywall anchor if stud is not present.

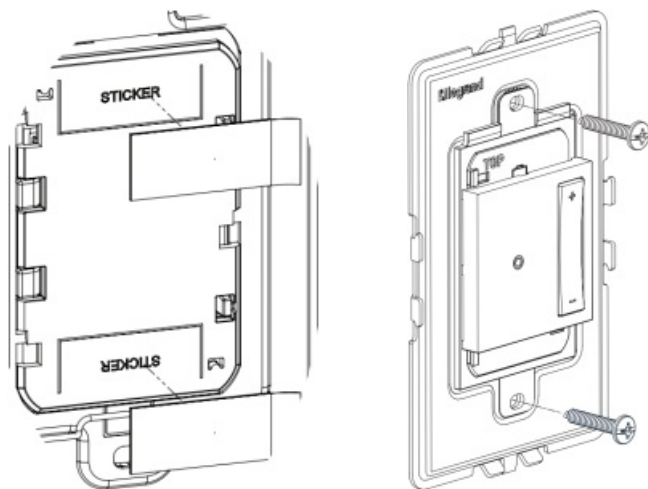

Using Adhesive

Using Screws

Adhesive mounting is not the recommended mounting method utilizing real materials, cast metal or Hubbardton Forge® Wall Plates

**WARNING**

To prevent severe shock or electrocution, always disconnect power at the service panel before beginning work.

**WARNING**

Failure to connect the ground wire will result in an unsafe installation that could lead to personal injury.


Note: Skip Section 3, if installing on a wall surface.

Electrical box installation

Remove the grounding wire label from back of device to access the ground wire. Connect it to box ground using provided end cap.

If installing this device with softTap smart dimmer with Netatmo, WNAL50 or other wired Netatmo devices, follow their instructions on how to terminate the spare wires in the box.


Mount device to wall box with screws provided. Tighten screws just enough to hold frame in place. Do NOT overtighten.

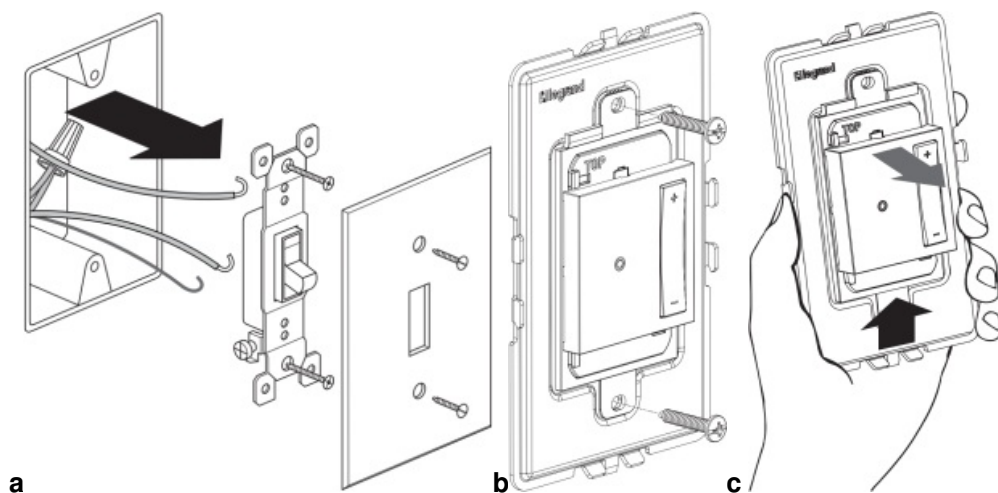

In case of multi-gang installation, replace the provided frame with adorne™ multi gang frame.

While holding the frame with one hand, push the device up slightly until it snaps out and then pull it out of the frame.

Secure the device to the multi gang frame using frame mounting screws.

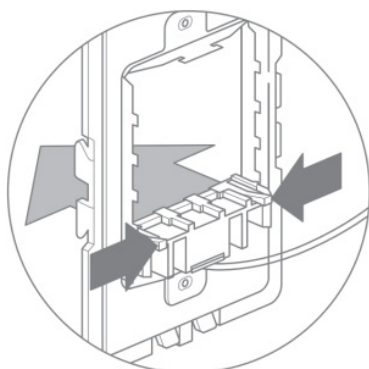**Remove spacers from the frame.**


Since this dimmer fills the frame completely, you will not need the spacers. From the back of the frame, pinch the

tabs on the spacer to release.


4

Snap wall plate to frame.

There are three click-stops to adjust the fit of the wall plate to the dimmer and the wall.

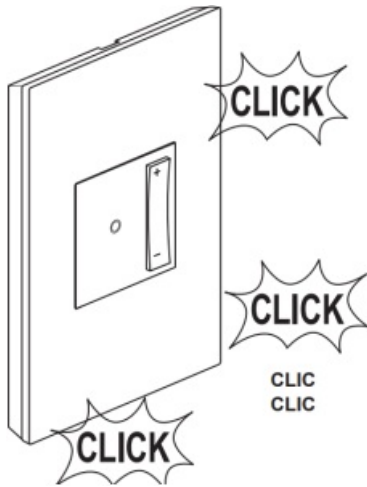

NOTE: To remove wall plate, insert a small, flat screwdriver in notches on wall plate and twist gently to pry from frame.



Never apply cleaner directly to the dimmer or wall plate. Apply to a soft cloth and use cloth to remove any smudges from the product.

5

Set Up Your System

Remove battery insulation tab before starting the setup.

- Download and launch the Legrand Home + Control app. The app is available on the App Store or on Google Play.
- Connect your smart device to your home network by following the step by step instructions in the app.
- Use the app to control your smart device.

6

Getting to Know Your Battery Powered Dimmer

Item	Name	Description
1	LED Indicator Light	Indicates the current state of device during setup
2	EZ Button	Used to initiate setup
3	Battery	CR2032 3V battery – Replaceable

LED Indicator Light Explanations

State of Light	Explanation
Blinking Green	Device is attempting to connect to the network.


Reset to Factory Default

Deleting a device from the app will reset it to factory defaults.

To manually reset the device to factory defaults press and hold the EZ button for 15 seconds until you see the LED blink green and red then release. The LED will turn off when the reset is complete.

Due to ongoing product improvements, Legrand reserves the right to change specifications without notice. For the most recent instruction sheets or more information on this product, please see this link or scan the QR code:


<https://www.legrand.us/p/wnal63w1>

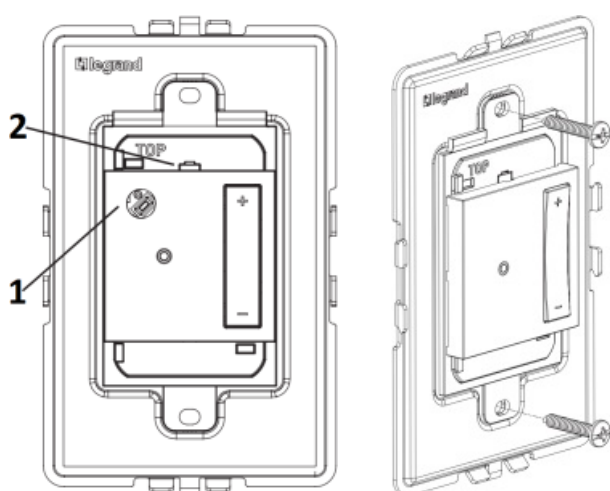

1. EZ Button
2. LED

Battery Replacement

The device includes a CR2032 battery. To replace the battery, Remove the cover as shown.

**Technical Assistance:**

(877) 295-3472

www.adornemyhome.com/install

LIMITED TWO-YEAR WARRANTY

Limited two-year warranty information for adorne™ products is available at www.legrand.us/adorne/warranty.

Limited warranty information for adorne™ products may also be obtained free of charge by sending a written request, along with your proof of purchase (including purchase date), to:

Legrand
Attn: adorne Customer Service/Warranty Department
50 Boyd Avenue
Syracuse, NY 13209

No: 341335 - 05/21

© Copyright 2021 Legrand All Rights Reserved.

60 Woodlawn Street CANADA
West Hartford, CT 06110 905.738.9195
1.877.BY.LEGRAND www.legrand.ca
(295.3472)
www.legrand.us

**Documents / Resources**

[legrand Adrone WNAL63 Wireless Smart Dimmer with Netatmo](#) [pdf] Instruction Manual
ASWDM, 2AU5D-ASWDM, 2AU5DASWDM, Adrone WNAL63, Wireless Smart Dimmer with Ne
tatmo, Interrupteur intelligent sans fil avec Netatmo