


lighting styles ICH1130A05 Chandelier Lamp



lighting styles ICH1130A05 Chandelier Lamp Instruction Manual

[Home](#) » [Lighting Styles](#) » lighting styles ICH1130A05 Chandelier Lamp Instruction Manual 

Contents

1 TOOLS AND MATERIALS

REQUIRED:

2 SAFETY PRECAUTIONS:

3 INSTALLATION

3.1 Documents / Resources

3.1.1 References

3.2 Related Posts

INSTRUCTIONS PERTAINING TO RISK OF FIRE OR INJURY TO PERSONS
READ ALL INSTRUCTIONS IMPORTANT SAFETY INSTRUCTIONS SAVE THESE INSTRUCTIONS

harmonizedhome
CANARMING


CHANDELIER

ICH1130A04
ICH1130A05
10/22

TOOLS AND MATERIALS REQUIRED:



Phillips
Screwdriver



Wire Cutters



Pliers



Wrench

Wiring supplies
as required by
local electrical
code



SAFETY PRECAUTIONS:

1. TURN OFF ELECTRICAL POWER BEFORE STARTING INSTALLATION OF LIGHT FIXTURE.
2. THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.
3. CONNECT THE GROUND WIRES (BARE COPPER OR GREEN) FROM YOUR FIXTURE TO THE GROUND WIRE (BARE COPPER OR GREEN) OR GROUND SCREW IN THE ELECTRICAL BOX.
4. TO CLEAN THE FIXTURE, TURN OFF THE POWER, WAIT FOR IT TO COOL, AND WIPE THE FIXTURE WITH A CLEAN, SOFT CLOTH.


NOTE: Product may not look exactly as shown in figures.

INSTALLATION


1. Spread the arms evenly. Tighten the bottom box with the finial against the stud. Tighten the cap against the assembly by the nut.

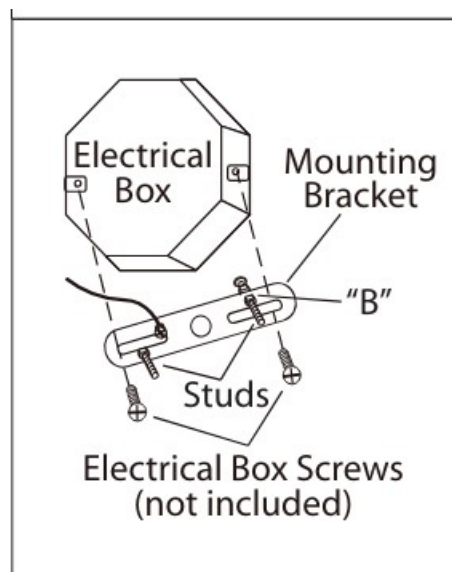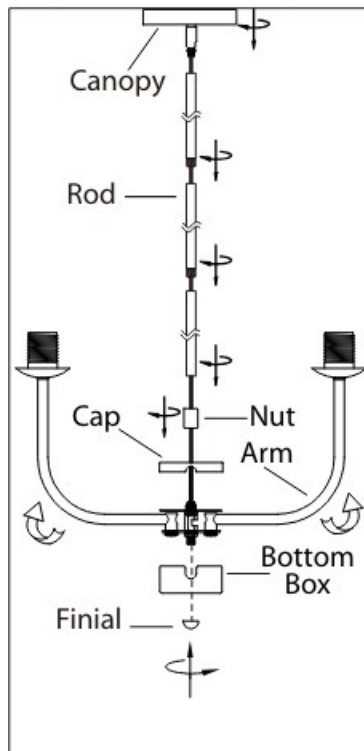

2. Install the length of rod that is required by threading wire through the rod and screwing it to the fixture. Screw the canopy to the fixture.
3. Loosen "B". Adjust stud to desired length and lock in place with "B". Mount the mounting bracket to electrical box using electrical box screws (not included). Make sure the studs on the mounting bracket are facing out from the electrical box.
4. Connect the ground wires (bare copper or green) from your fixture to the ground wire (bare copper or green) or ground screw in the electrical box. Connect the black wire (or wire with marking) from the fixture to the black wire in the electrical box and connect the white wire from the fixture to the white wire in the electrical box.

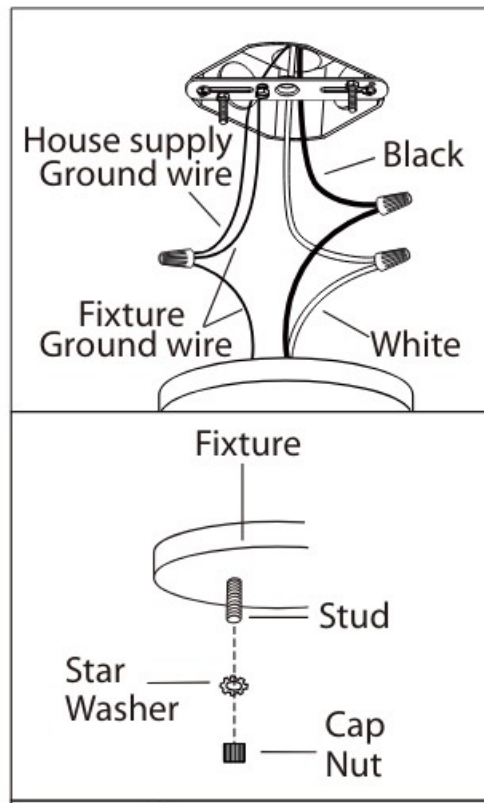


5. Once connections of wires are completed, carefully tuck wires and wire nuts into the electrical box making sure no bare wire (on the black and white) is visible at the wire nuts.
6. Position fixture over studs on mounting bracket assembly. Secure fixture in place with star washers and cap nuts.
7. Remove spinner nut and support bracket from socket. Position glass on lamp and secure with spinner nut to attach the glass to the fixture.)

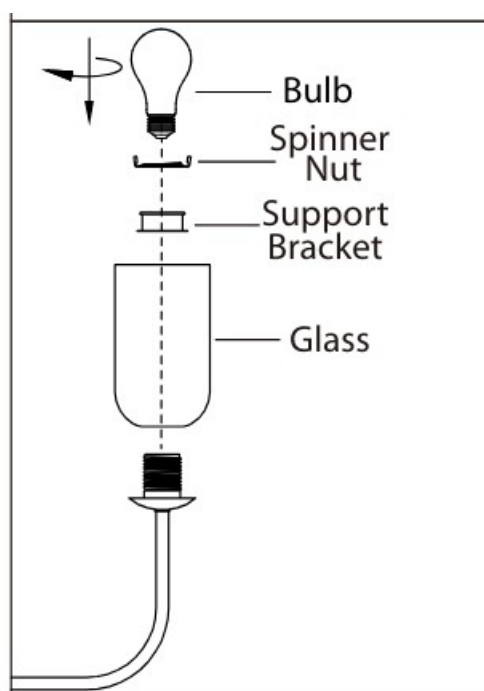

8. Install specified bulb type and wattage (not included).

Documents / Resources



[lighting styles ICH1130A05 Chandelier Lamp](#) [pdf] Instruction Manual
ICH1130A04, ICH1130A05, ICH1130A05 Chandelier Lamp, ICH1130A05, Chandelier Lamp,
Lamp

References

- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.