



LINKZONE MW45V2 LTE Cat4 Mobile WiFi User Manual

[Home](#) » [LINKZONE](#) » LINKZONE MW45V2 LTE Cat4 Mobile WiFi User Manual 

Contents

- [1 LINKZONE MW45V2 LTE Cat4 Mobile WiFi](#)
- [2 LTE Cat4 Mobile WIFI MW45V2 PRODUCT SPEC](#)
- [3 Documents / Resources](#)
- [4 Related Posts](#)

LINKZONE

LINKZONE MW45V2 LTE Cat4 Mobile WiFi




Product Information

Product Name	LINKZONE LTE Cat4 Mobile WiFi MW45V2
4G LTE Category	CAT4
Download Speed	Up to 150 Mbps
Upload Speed	Up to 50 Mbps
User Connections	Up to 15
Wi-Fi Hotspot	802.11 b/g/n 2.4 GHz – 2x2 MIMO
Battery Life	Up to 8 hours
Dimensions	87.6mm * 59.6mm * 12.9mm
Weight	78g
Commercial Name	LINKZONE LTE Cat4 Mobile WiFi MW45V2
Form Factor	Type A
Color Available	White, Black
Platform	Qualcomm MDM9207 + RTL8192ES
Memory	256MB NAND flash + 128MB DDR
Antenna	Internal 2X2 MIMO
Wi-Fi Interface	2X2 MIMO 802.11b/g/n, Single SSID
SIM Slot	1 x 3FF SIM slot
Ports	1 x Power, 1 x WPS, 1 x Micro USB 2.0
LED Indicators	Signal, Battery, WLAN, SMS
Battery	2150mAh Battery
Certifications	CE, WiFi Alliance, RoHs, REACH, WEEE, GCF
In Box	Mobile WiFi, Quick Start Guide, PSI, 1m USB cable 2.0, English/Italian/French/Spanish for generic version. Other languages available upon request. FOTA
Other Features	Sim Lock / IP Filter / DMZ
Date Rate	FDD-LTE DL up to 150Mbps, UL up to 50Mbps
Frequency	FDD LTE, DC-HSPA+, HSPA+, HSUPA, HSDPA, UMTS, EDGE, GPRS FDD LTE: B1/3/7/8/20 UMTS/HSPA/HSPA+: B1/8 GSM: 900/1800 MHz
High-Speed Internet Access	Cat 4
Setup	Simply plug in a 3FF SIM card to connect to the 4G network
User Connections	Supports up to 15 user connections
Management	Easy setup and management with a dedicated app

Product Usage Instructions

1. Make sure the device is charged or connected to a power source.
2. Locate the 3FF SIM slot and insert a compatible SIM card.
3. Power on the device by pressing the power button.
4. Wait for the device to establish a connection to the 4G network.
5. On your mobile or computer, search for available Wi-Fi networks.
6. Select the Wi-Fi network with the SSID (network name) of the device.
7. Enter the Wi-Fi password, if prompted.
8. Once connected, you can now access the internet through the device.
9. For advanced settings and management, download and install the dedicated app on your mobile device.

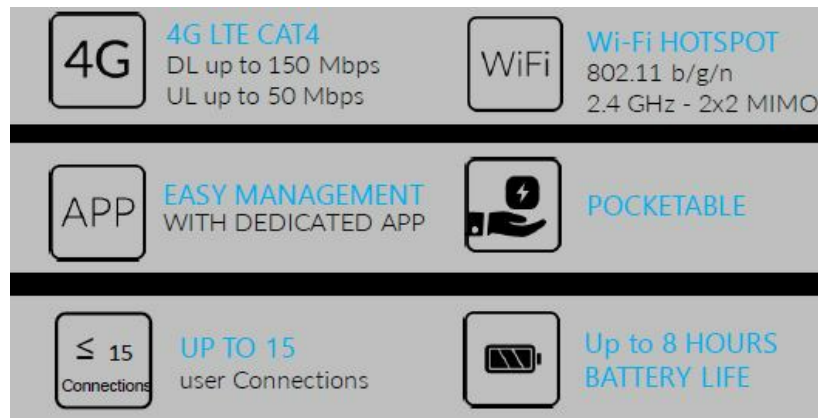

LTE Cat4 Mobile WIFI MW45V2 PRODUCT SPEC



Cat 4 High-speed internet access Simply plug 3FF SIM card, and you can have a 4G network right away to Support up to 15 user connections Easy set up & management

Commercial name	MW45V2
Form Factor	4G Mobile WiFi, (Type A)
Color Available	White, Black
Platform	Qualcomm MDM9207 + RTL8192ES
Memory	256MB NAND flash + 128MB DDR
Antenna	LTE DL 2x2MIMO WiFi Internal 2X2 MIMO
WiFi	802.11b/g/n, Single SSID, Up to 15 connections
Interface	1 x 3FF SIM slot, 1 x Power, 1 x WPS, 1 x Micro USB 2.0,
LED	Signal, Battery,WLAN, SMS
Battery	2150mAh Battery, Working status: 8 hours
Certifications	CE, WiFi Alliance, RoHS, REACH, WEEE, GCF
In Box	Mobile WiFi, Quick Start Guide, PSI, 1m USB cable 2.0,
Other Features	English/Italian/French/Spanish for generic version. Other languages available upon request. FOTA
Optional Features	Sim Lock /IP Filter / DMZ
Date Rate	FDD-LTE DL up to 150Mbps, UL up to 50Mbps
Frequency	FDD LTE, DC-HSPA+, HSPA+, HSUPA, HSDPA, UMTS, EDGE, GPRS FDD LTE: B1/3/7/8/20 UMTS/HSPA/HSPA+: B1/8 GSM: 900/1800 MHz

Documents / Resources



[LINKZONE MW45V2 LTE Cat4 Mobile WiFi](#) [pdf] User Manual

MW45V2 LTE Cat4 Mobile WiFi, MW45V2, LTE Cat4 Mobile WiFi, Cat4 Mobile WiFi, Mobile WiFi, WiFi

[Manuals+](#).