



logickeyboard TITAN Wireless Backlit Keyboard Instruction Manual

[Home](#) » [logickeyboard](#) » logickeyboard TITAN Wireless Backlit Keyboard Instruction Manual 

Contents

- 1 [logickeyboard TITAN Wireless Backlit Keyboard](#)
- 2 [Product Information](#)
- 3 [Product Usage Instructions](#)
- 4 [FAQ](#)
- 5 [Introduction](#)
- 6 [Get to know](#)
- 7 [Status LED indicators](#)
- 8 [First Use](#)
- 9 [Keyboard Controls And Functions](#)
- 10 [Titan Powered And Cleaning](#)
- 11 [Specifications](#)
- 12 [Warranty Information](#)
- 13 [Documents / Resources](#)
 - 13.1 [References](#)



logickeyboard TITAN Wireless Backlit Keyboard



Product Information

Specifications

- Product Name: Titan Mac Keyboard
- Features: Backlit keys for precise typing experience
- Included in the Box: Titan Mac Logickeyboard, USB cable, User guide
- Connectivity: USB-C wire connection port
- Controls: Backlit keys, Mac OS function controls, 5 LED status indicators, Backlight controls, Connectivity controls

Product Usage Instructions

Getting Started

- Connect the Titan Mac Keyboard to your Mac using the provided USB-C cable.

Backlit Keys

- Press the Backlight controls to adjust the brightness of the backlit keys for better visibility in low light conditions.

Mac OS Functions

- Use the Controls for Mac OS functions to access specific features on your Mac easily.

LED Status Indicators

- Check the LED indicators for Caps Lock, fn Lock, Battery status, Bluetooth connection, and USB wired connection. The color of Caps Lock and Fn Lock LEDs will match the connectivity setting.

Connectivity Controls

- Use the Connectivity controls to switch between Bluetooth and USB wired connections as needed.

On/Off Switch

- Toggle the On/Off switch to turn the keyboard on or off. When on, the keyboard uses the 5 LED status indicators.

FAQ

Frequently Asked Questions

- **Q:** What do the different LED indicators on the Titan Mac Keyboard signify?
 - **A:** Caps Lock and Fn Lock LEDs indicate the connectivity settings. Battery LED shows charging status. Bluetooth and USB wired connection LEDs show the current connection type.

Introduction

Thank you for purchasing the Titan Mac Logickeyboard. It features backlit keys delivering a precise typing experience, and a dual-connectivity system enabling use as USB wired or Bluetooth wireless – selectable with a keypress.


The Titan keyboard uses a long-lasting rechargeable lithium battery for the Bluetooth system and is designed and optimized for use with Mac OS. However, it can easily be connected to an iPad or iPhone as well, or to two Macs – one corded and another wirelessly – making it ideal to control two workstations.

What's in the box

- Titan Mac Logickeyboard
- USB cable
- User guide

Get to know

Get to know the Titan Mac Logickeyboard

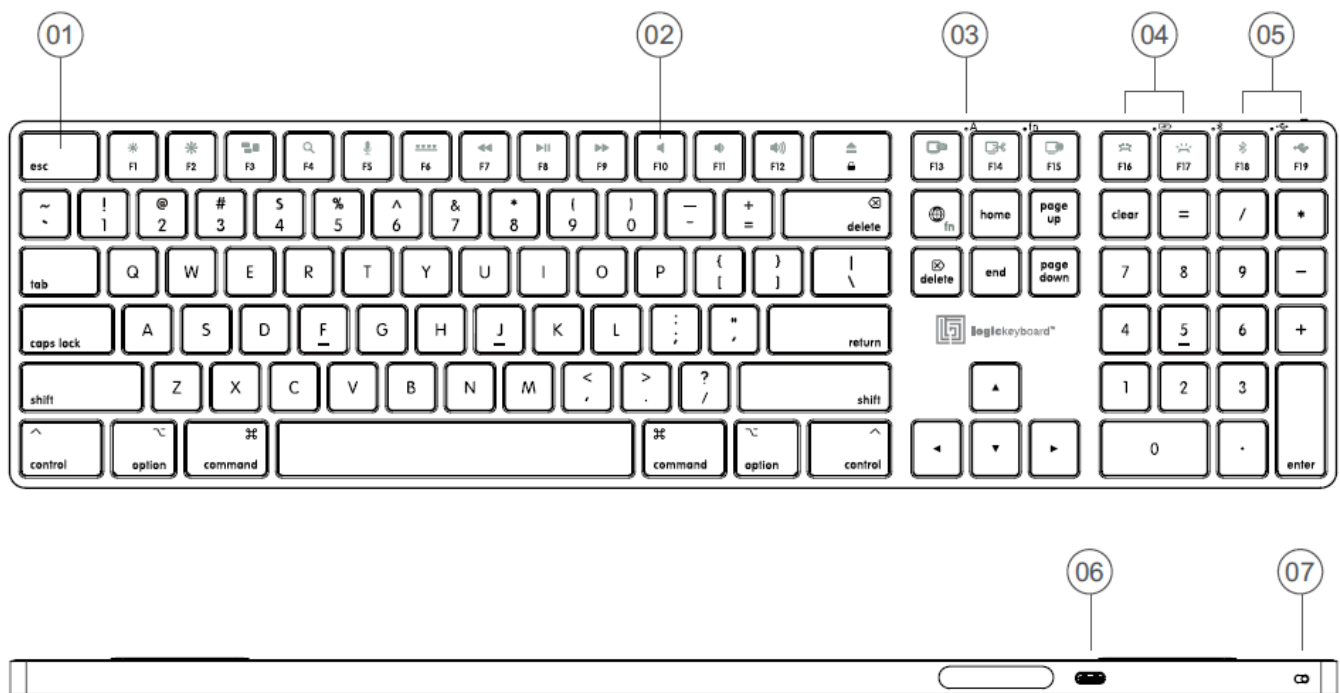


1. Backlit keys
2. Controls for Mac OS functions
3. 5 pcs status LED indicators
4. Backlight controls
5. Connectivity controls
6. USB-C wire connection port
7. On/Off switch



Status LED indicators

When the Titan keyboard's on/ off switch is in On position, the keyboard uses 5 LED status indicators. What do they mean?

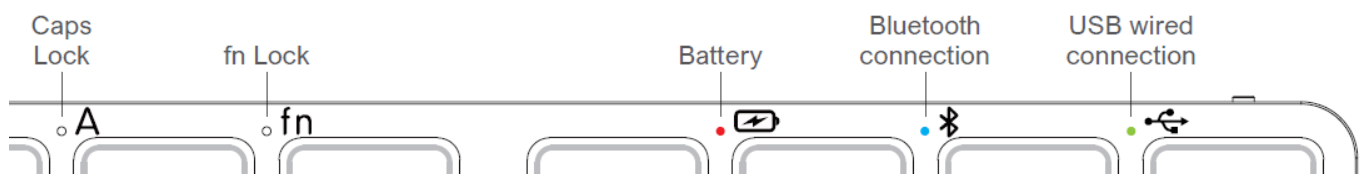

☐ **Caps Lock [A] and Fn Lock [fn]** LED indicators illuminate in color matching the connectivity setting.

☒ Battery indicator

- **On** = Battery being charged
- **Off** = Battery is fully charged, or USB cable is not connected
- **Slowly flashing (est. 1 flash/sec)** = Battery power level is below <5%. Insert cable to recharge.
- **Fast flashing (est. 3 flashes/sec)** = Battery power is critical low <1%. Backlight turns off when battery is critically low.

☒ Bluetooth connection

- **On** = Keyboard is connected wirelessly via the Bluetooth system.
- **Off** = Bluetooth system is deactivated, and keyboard is connected via USB cable.
- **Slowly flashing (est. 1 flash/sec)** = Bluetooth system is in pairing mode, searching for a new host.
- **Fast flashing (est. 3 flashes/sec)** = Bluetooth connection is selected but the Bluetooth system is unable to pair with the last connected host. Make sure the device Titan keyboard is connected to is turned on and within operating distance. After 30 seconds of searching in vain for its host, the Titan keyboard will enter Power Saving Mode.

☒ USB wired connection


- **On** = Keyboard is connected via USB cable.

- **Off** = Keyboard is connected wirelessly via the Bluetooth system.
- **Fast flashing (est. 3 flashes/sec)** = USB wired connection is selected, but keyboard is unable to connect. Make sure the USB cable is properly inserted in both the Titan keyboard and your Mac or try connecting it to another USB port. To avoid battery power drainage in such an unintentional situation, the keyboard will enter Power Saving Mode after 30 seconds.

First Use

Let's begin – first use

At first time usage, it is recommended to charge the battery to full power. Connect the included USB cable to your Titan keyboard and a USB port on your Mac, or an external 5V USB charger. The battery indicator will light permanently red when charging. When the battery is fully charged the battery indicator will turn off. You can start

using the keyboard before the battery is fully charged. Slide the keyboard on/off switch to position On  so green is visible. The three LED indicators for Battery (red) Bluetooth connection (blue) and USB connection (green) will light up for 2 seconds.

Bluetooth pairing

When you power up the Titan keyboard for the first time, it automatically enters Bluetooth pairing mode. The Bluetooth indicator LED (blue) will flash slowly (est. 1 sec flashes). This indicates the keyboard is searching for a Bluetooth host for connection.

1. When you power up the Titan keyboard first time, it automatically enters Bluetooth pairing mode. The Bluetooth indicator LED (blue) will flash slowly (est. 1 sec flashes). This indicates the keyboard is searching for a Bluetooth host for connection. Go to System Preferences on your Mac, iPad or iPhone, and choose Bluetooth.
2. Search for TITAN keyboard and click to connect.
3. When the keyboard is successfully paired, the associated blue Bluetooth indicator LED will light permanently.
4. If you later wish to pair your Titan keyboard to another Bluetooth device, you can easily enter pairing mode again with a long key press of [Fn+F18]. Press and hold the two keys for 2 seconds. The blue LED Bluetooth indicator will flash slowly indicating the keyboard is searching for a new host. Follow steps 1 to 3.

USB connection

1. Connect the included USB cable to the Titan keyboard and to your Mac.
2. Press [Fn+F19] to switch to USB wired connection.
3. After the keyboard's connectivity is changed to USB wired, the associated green USB indicator will light permanently.











Switch connectivity











- For wireless connection press  + 
- For USB wired connection press  + 

Keyboard Controls And Functions

Keyboard Controls

The function keys (F-keys) in the top row of the Titan keyboard provide controls for several common Mac OS functions. These controls are accessible by pressing the designated F-key in combination with the Fn modifier key simultaneously.

	Dim screen
	Brighten screen
	Mission control
	Spotlight Search
	Dictation/ Siri
	Hide/show dock
	Rewind/Back one song
	Play/Pause
	Fast forward/Next song
	Mute speaker

	Decrease speaker volume
	Increase speaker volume
	Eject
	Screenshot, entire screen
	Screenshot, selection of screen
	Screenshot and recording opt
	Keyboard illumination down
	Keyboard illumination up
	Bluetooth connection
	USB wired connection


Locking Fn modifier key

To eliminate pressing the Fn modifier key for every Mac OS shortcut control, the Fn key can be locked with the key combination [Command+Fn]. When locked the Mac OS controls are directly accessible and the designated fn LED indicator lights up.



System Lock

To avoid unintentional activation of the System Lock key it requires a long key press.



- Press and hold for 2 seconds (without the use of Fn key)

Typing options

If two or more keyboard languages are installed under your System Preferences, ex if using other language-specific characters, you can toggle between the keyboard languages using the Fn/Globe key.

Change keyboard language



- Press and hold for 2 seconds

Alternatively, you can toggle a longer list of keyboard languages, or show emoji symbols using the following key combinations.

- Toggle list of keyboard languages



- Show emoji symbols



Backlit keys

- The Titan keyboard's backlit keys are adjustable in five levels: 100%, 80%, 60%, 40%, 20%, and 0% off. When using the keys' backlight feature the Titan keyboard consumes more power, and cabled connection is recommended to preserve battery drainage.
- If the Titan keyboard is being used wirelessly with backlight, we recommend dimming the light as much as possible to save power.
- To prevent unintentional loss of battery power, the backlight goes to 0% after 2 minutes of inactivity (no keys pressed) and comes back on with a key press.
- The keys' illumination is controlled with the following key combinations.

- Keyboard illumination down



- Keyboard illumination up




Titan Powered And Cleaning

Keep the Titan powered

We recommend never letting the Titan keyboard's lithium battery run completely out of power. When the battery power is low and the battery LED indicator starts flashing, insert the USB cable and recharge the keyboard timely to ensure uninterrupted work.

If battery runs critically low the battery LED indicator starts flashing fast. To prevent sudden shutdown the backlight turns off.


Note: If the lithium battery runs completely out of power, slide the keyboard on/off switch to Off  so black is visible, before connecting the USB cable and recharging. Once the charging cable is connected to a power source, you can slide the on/off switch back to On and start using the Titan keyboard again.

To preserve battery power when the keyboard is set to Bluetooth wireless connectivity, the Titan keyboard uses a Power Saving feature. After 2 minutes of inactivity (no keys pressed) the backlight turns off. After 15 minutes of inactivity the Titan keyboard enters Power Saving Mode and sets the Bluetooth system to stand-by. It is reactivated by pressing any key. Allow it a couple of seconds to reconnect.

Note

- When the Titan keyboard is connected to a USB port or an 5V external power supply, the power saving features are disabled despite the keyboard is set to Bluetooth wireless connection.

Cleaning your Titan

- We recommend keeping your keyboard clean for an optimal user experience and for a healthy keyboard. Clean only the outside of the keyboard.
- Before you clean it, make sure the on/off switch is set to Off 
- Use a lint-free cloth and clean the keys gently. Avoid using any strong chemicals such as solvents or abrasives, and be careful not to get any liquids or moisture under the keys or into any openings of the keyboard.

Specifications

System requirements

- Mac OS X (10.10 or later version)
- USB-C port and/or Bluetooth receiver

Keyboard specifications

- Dual connectivity: Bluetooth wireless and USB wired connection
- Backlit low-profile keys
- Scissors switch key mechanism
- Key travel 0.075" ~ 2 mm
- 5 LED indicators for: Caps Lock, fn Lock, Battery, Bluetooth connection and USB connection
- Aluminum body
- Dimensions: 16.93" X 4.69" X 0.54" ~ 430 mm X 119 mm X 13 mm
- Net weight: 20 oz ~ 567 gr
- Certifications: FCC-ID, CE-RED, UKCA & RoHS

Battery

- Rechargeable lithium battery
- Capacity: 1500mAh
- Battery life without backlight: 300 hours
- Battery life with backlight: up to 40 hours (backlight at 20%)
- Charging time from 0 – 100% est. 4.5 hours

Bluetooth system

- Bluetooth v 5.1
- Connection distance: up to 30 ft ~ 10 m

USB cable

- USB-C to USB-C
- Length: 59.0" ~ 1.5 m

Warranty Information

Your Titan Mac Logickeyboard contains no user-serviceable parts. Do not attempt to disassemble or open your Titan Mac Logickeyboard, or expose it to liquids or high temperatures. The Titan Mac Logickeyboard has a limited warranty covering factory defects for 12 months from the date of delivery. The warranty does not cover defects caused by misuse or from spills into the keyboard.

Any claim must be made to Logickeyboard within the warranty period and must be made in writing with the proof of purchase identifying the products), date of purchase, purchase price, and a statement of the defect and its location at the time of claim. Due to the nature of the products supplied, and the inability of Logickeyboard to control the use of the merchandise on site, faulty products must be sent to a Logickeyboard facility for inspection. Returns are on buyers' expense and risk.

The liability of Logickeyboard for a defective product is limited to either: (i) replacement or repair of the faulty product or (ii) the refund of the purchase price of the defective part, whichever is the smaller amount. Logickeyboard bears no liability for defects if the product has been altered or modified in any way. In no circumstances can Logickeyboard be liable for any consequential damage howsoever caused, or any injury, loss or damage which may be caused to any other merchandise or to any loss of business or loss of profit resulting there from.

Protect the environment

- The Titan Mac Logickeyboard contains a lithium-ion battery. At the End of Life of the keyboard, don't try to open or crush the battery.
- The Titan Mac Logickeyboard must be disposed of separately from household waste. Logickeyboard accepts receiving EOL products to ensure proper waste. However, to save unnecessary transportation of the product, we recommend disposing of it at the nearest recycling site taking electronics waste.
- The gift box of the Titan Mac Logickeyboard is made from 100% recyclable cardboard. We recommend wasting it separately at the nearest recycling station taking cardboard.

WWW.LOGICKEYBOARD.COM

Disclaimer – the content of this manual is subject to changes without notice. We assume no responsibility for any errors or inaccuracies that may appear in this user guide. Nor do we assume responsibility for any damage on other products or services than supplied or provided by Logickeyboard

Logickeyboard is a trademark of BSP Europe A/S. All other names, product names and trademarks in this documentation are the property of their respective holder.

Copyright 2024© by BSP Europe A/S – Denmark

Documents / Resources

	logickeyboard TITAN Wireless Backlit Keyboard [pdf] Instruction Manual 2024-06-15, UK Manual, TITAN Wireless Backlit Keyboard, TITAN, Wireless Backlit Keyboard, Backlit Keyboard, Keyboard
---	--

References

- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.