

LUMINTOP EDC03 Pocket EDC Flashlight



LUMINTOP EDC03 Pocket EDC Flashlight Instruction Manual

[Home](#) » [LUMINTOP](#) » LUMINTOP EDC03 Pocket EDC Flashlight Instruction Manual 

Contents

- [1 LUMINTOP EDC03 Pocket EDC Flashlight](#)
- [2 Technical Parameters](#)
- [3 Features](#)
- [4 Operation](#)
- [5 Battery Usage](#)
- [6 Warranty](#)
- [7 Documents / Resources](#)
 - [7.1 References](#)



LUMINTOP EDC03 Pocket EDC Flashlight



Technical Parameters


ANSI/NEMA FL1		Low	Med	High	Turbo	Strobe
Output	14500	8LM	130LM	450LM	800LM	450LM
	Alkaline	2LM	20LM	150LM	280LM	150LM
	Ni-MH	2LM	20LM	130LM	320LM	130LM
Runtime	14500	50h	4h10m	58m	5m+ 1h 5min	/
	Alkaline	65h	9h37m	50m	20m	/
	Ni-MH	80h	16h	2h28m	1h5m	/
Distance	70 Meters (Max)					
Intensity	1235 Candela (Max)					
Impact Resistant	1.5Meters					
Waterproof	IP68 (Underwater 2meters)					
Light Source	OSRAM LED					
Power	8W (Max)					
Battery	1 x 14500 Li-ion / 1 x AA Battery					
Size	83*18.5mm					
Net Weight	~28g(Battery excluded)					

Notice:

- The above-mentioned parameters are lab-tested by Lumintop, using a Lumintop 3.7V/920mAh 14500 Li-ion cell, Eneloop Ni-MH and Alkaline cells, it may vary due to the difference in environment and batteries.

Features

- Utilizes OSRAM LED with a lifespan of 50,000 hours
- Powered by 1 x AA or 1 x 14500 rechargeable Li-ion battery
- 4 output levels plus strobe with max 800 lumens output
- Mode memory function recalls the last use output when turning on the next time
- Super long runtime up to 2.5 days in "LOW Mode"
- **Size:** 83 x 18.5mm, N.W.: 28g
- Aircraft-grade aluminium alloy, premium II-type hard-anodized anti-abrasive finish, toughened and wear-resistant
- P68-rated waterproof, dust-proof, submersible to 2 meters

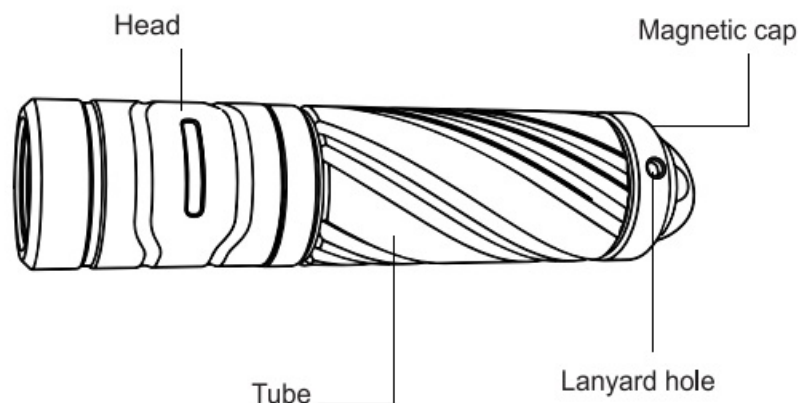

Operation

- **ON/OFF:** Twist and tighten/loosen the light head to turn ON/OFF
- **Output Selection:** Rapidly twist the light head from loosen to tighten to change modes
- **Strobe:** Continuously rotate the light head (on then off) for 6 times
- **Intelligent Memory Function:** The light will memory and recall the last use output when turning on again (2 seconds after turning off). Excluding "Strobe Mode".

Battery Usage

Type	Model	Voltage	
Lithium-ion	14500	3.7V	✓
Ni-MH	AA	1.2V	✓
Alkaline	AA	1.5V	✓

Notice

1. 14500 Lirion cells are industry batteries. It is recommended to use a reliable and high-quality Li-ion battery with a protective circuit.
2. When replacing the battery, a high-quality cell is recommended, and make sure the anode side (+) of the battery towards the light head.

Warnings

1. Do not shine the light directly into anyone's eyes, this may hurt the eyes.
2. If a long time no uses the light, please take out the battery to prevent damage from battery leakage.
3. Lockout or unscrew the lamp to cut off the electricity to prevent accidental activation when carrying it in a pocket or package, etc.

Warranty

1. **30-day free replacement:** LUMINTOP will replace or repair products with manufacturing defects within 30 days of purchase.
2. **5 years repair:** LUMINTOP will repair the products free of charge within 5 years (accessories 1 year, products


with built-in battery 2 years)of purchase if problems develop with normal use.

3. **Lifetime warranty:** free repair is required after the guarantee period, we'll charge for parts accordingly.
4. **This warranty does** not cover normal wear or tear, abuse, damage by force majeure or human factors.

Environmental Disposal:

- Information about environmental disposal of electrical and electronic equipment from private households, complying with waste electrical and electronic equipment(WEEE)regulation.
 - This symbol on the electrical and electronic products and attached documents indicate that such products shall not be disposed of as general household waste.
 - Instead, they shall be sent to the recycling stations where they will be received free of charge for appropriate disposal.
 - Proper disposal of waste products can help preserve natural resources and reduce the adverse impacts of improper disposal of waste on human health and the environment.
 - Please contact relevant authorities for information about your nearest WEEE collection points.
 - Improper disposal of such wastes may result in fines or other penalties following the law.
-

Documents / Resources

	LUMINTOP EDC03 Pocket EDC Flashlight [pdf] Instruction Manual EDC03, EDC03 Pocket EDC Flashlight, Pocket EDC Flashlight, EDC Flashlight, Flashlight
---	--

References

- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.