




See Everthing, Miss Nothing

We hope you never have the need,
but if you do our service is friendly and hassle-free.

✉ support@czeview.net

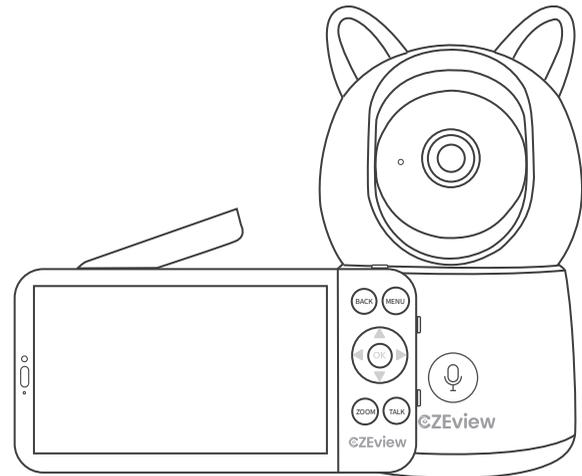

Baby Monitor User Manual

CONTENTS

IMPORTANT SAFETY INSTRUCTIONS	P01
BATTERY	P02
CAUTIONS	P02
WHAT'S INCLUDED	P03
PRODUCT OVERVIEW	P04
SPECIFICATIONS	P06
PREPARATION	P07
CONNECTING/DISCONNECTING THE CAMERA FROM THE MONITOR	P08
• CONNECTING THE CAMERA TO THE MONITOR	P08
• UNBINDING THE CAMERA FROM THE MONITOR	P11
NIGHT VISION	P13
SAFETY PROTECTION	P13
SET UP THE SYSTEM	P14
• DOWNLOAD APP	P14
• REGISTER AND LOG IN TO YOUR ACCOUNT	P14
SET UP THE CAMERA ON THE APP	P15
• METHOD 1 CONNECT VIA BLUETOOTH ENABLED (RECOMMENDED)	P15
IMPORTANT TIPS	P18
• SCAN THE QR CODE FOR DETAILED USER GUIDE	P18
FCC STATEMENT	P18

IMPORTANT SAFETY INSTRUCTIONS

- Ensure adherence to all warnings and instructions marked on the product.
- Adult setup is mandatory.
- The product serves as an aid only and should not replace responsible and proper adult supervision.
- Not designed for use as a medical monitor.
- Avoid usage near water to prevent the risk of electric shock.
- Utilize only the adapters provided to avoid damaging the product.
- Employ only attachments and accessories endorsed by the manufacturer.
- Disconnect from the power source before cleaning. Avoid liquid cleaners; use a dry cloth instead.
- Unplug during prolonged periods of non-use.
- Keep power cords clear of obstructions and ensure they are not a tripping hazard.
- Operate solely with the power source type indicated on the product.
- Avoid placing on unstable surfaces to prevent falls.
- Ensure proper ventilation to avoid overheating. Never cover ventilation slots.
- Do not attempt to disassemble. Contact authorized service facilities for maintenance.
- Supervise children to prevent product tampering.
- Store small, detachable parts away from young children to prevent choking hazards.
- Not for use by individuals with limited physical, sensory, or mental capabilities without proper supervision.


BATTERY

- Use only the specified battery to prevent explosion risks.
- Avoid exposure to extreme temperatures and pressures, which can cause explosions or leaks.
- Do not dispose of the battery in fire or attempt to damage it mechanically.
- Follow proper disposal guidelines for used batteries to minimize environmental harm.

CAUTIONS

- Handle batteries with care to avoid burn, fire, and explosion hazards.
- Protect the product from extreme temperatures, sunlight, and heat sources.
- Prevent strangulation by keeping cords out of children's reach.
- Do not place the camera within or too close to the baby's crib or playpen to avoid suffocation and strangulation risks.
- Install the camera safely away from the crib to prevent injury.
- Be mindful of potential interference from other electronic devices and position the camera unit accordingly.
- Regularly test sound reception for optimal performance.
- Maintain a distance of at least 1.5m/4.9ft between the monitor and camera to prevent microphone feedback.

WHAT'S INCLUDED



CZView Camera



Monitor



Power Adapter



Power Cord



Screw Pack



Mounting Bracket



User Manual



Adhesive



Reset Pin

! Note:

This package is designed exclusively for Single-Camera Baby Monitor purchasers. Dual-Camera Baby Monitor buyers receive an additional camera, power adapter, cord, screws, bracket, and adhesive.

PRODUCT OVERVIEW

•Camera

- Use the monitor/app to activate the light switch for three unique lighting modes.

Night Light

Indicator Light

Lens

SD Card Slot

- Supports SD card storage up to 128GB.

Reset Button

- To reset, press and hold Reset for 5 seconds.

Voice Call

- Press to call; Hold until a 'cuckoo' sound for pairing mode.

Microphone



Speaker

Power Input

Indicator Light

Solid Red Light	• Device abnormal
Slow Red Flashes	• Awaiting Wi-Fi connection
Fast Red Flashes	• Search for Wi-Fi networks
Steady Blue Light	• Camera is normal
Slow Blue Flashes	• Connecting to Wi-Fi / AP Connection Status
Fast Blue Flashes	• Device Upgrading

• Monitor

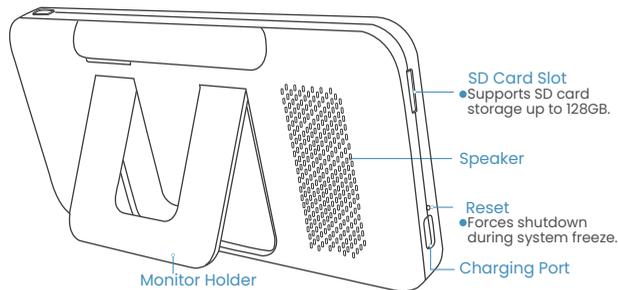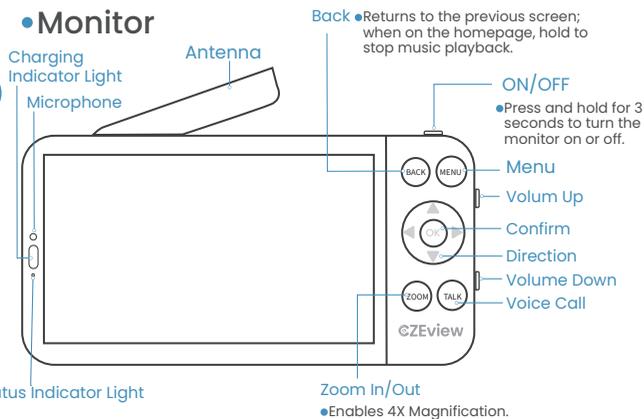

Charging Indicator Light

Solid Orange Light	• The monitor is charging
Solid Green Light	• The monitor is fully charged.
Light Off	• The monitor is not charging (not plugged in).

Status Indicator Light

Solid Orange Light	• The monitor is in use.
Light Off	• The monitor is powered off.


SPECIFICATION

SCREEN SIZE	5.5"
WIFI BAND	2.4GHz
PAN/TILT	355°/100°
TWO-WAY AUDIO	SUPPORTED
NIGHT LIGHT	THREE UNIQUE LIGHTING MODES AVAILABLE
LULLABY	14 LULLABIES VIA APP WITH SD CARD; 3 VIA MONITOR
HUMIDITY& TEMPERATURE DETECTION	SUPPORTED
MOVEMENT DETECTION	SUPPORTED
POWER SUPPLY	DC 5V/1A
LENGTH OF THE POWER CORD	4.9 FT
WORKING TEMP	32°F-104°F
LOCAL STORAGE	MICRO SD CARD (UP TO 128G)

PREPARATION


• LOCAL MONITORING

Operates independently of the internet, requiring a Micro SD card (up to 128GB, NOT INCLUDED) for recording and storage—optional if video and image storage isn't needed.

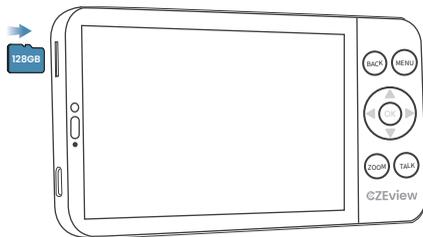

• APP MONITORING

Remote monitoring is enabled through an app, also necessitating a Micro SD card (up to 128GB, NOT INCLUDED) for storing videos and playing lullabies. Using an SD card is optional unless utilizing the specified feature. Alternatively, for video storage, consider subscribing to a cloud storage plan.

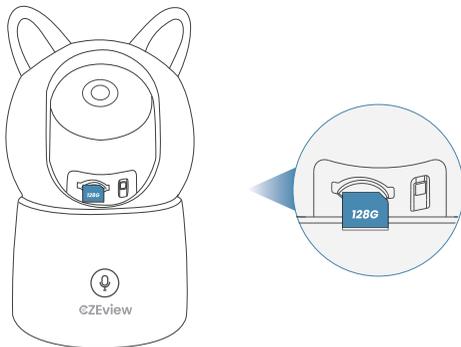


CONNECTING THE CAMERA TO THE MONITOR


To ensure a seamless setup, please observe the following guidelines before beginning:

- Ensure the monitor is fully charged prior to initial use.
- Maintain a distance of at least 1.5 meters (approximately 4.9 feet) between the monitor and camera to prevent microphone feedback.
- For successful pairing, the camera and monitor should not be more than 200 meters (approximately 656 feet) apart.


Power on the camera.

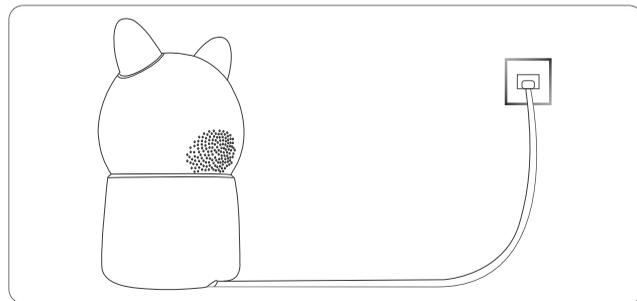


Press and hold the ON/OFF button on the monitor for three seconds to turn it on.

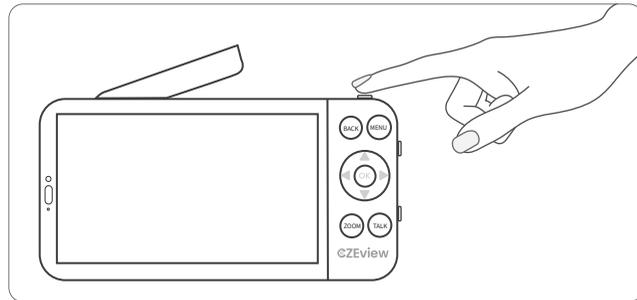

For optimal reception, fully extend the monitor's antenna.

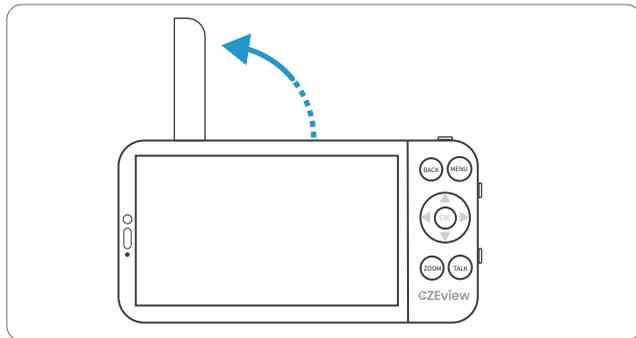


The camera will then automatically initiate and complete the connection process with the monitor.

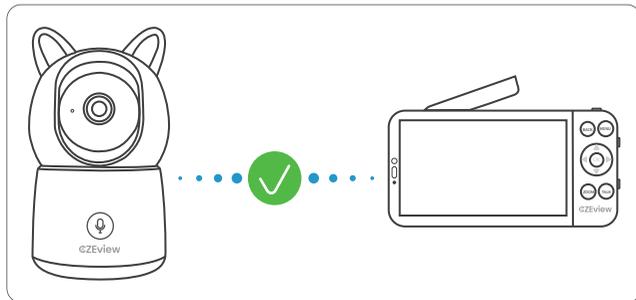


! Note:

If the camera fails to connect automatically, manually establish the connection as follows:

1. On the monitor, press the 'Menu' button (MENU).
2. Go to 'Settings' (gear icon) > 'Camera' (camera icon).
3. Under 'Camera Management,' choose 'Camera 1' or 'Camera 2' to pair.
4. Press and hold the 'Voice Call' button (microphone icon) on the camera until you hear a 'cuckoo' sound.
5. Press 'OK' (OK) on the monitor to complete the connection.

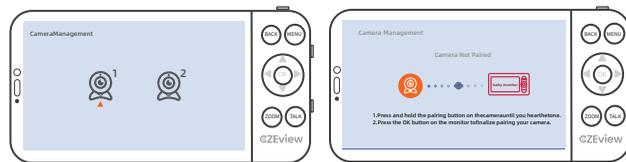

6. A solid blue indicator light on the camera and a success message on the monitor will confirm the connection.

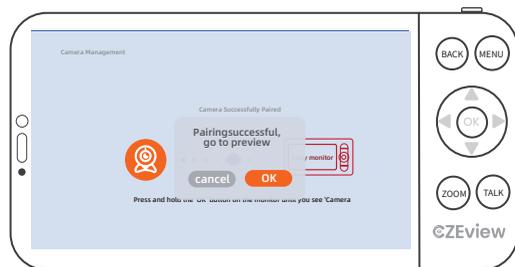


UNBINDING THE CAMERA FROM THE MONITOR

- On the monitor, press the 'Menu' button .
- Navigate to 'Settings'  > 'Camera' .
- In 'Camera Management', select either 'Camera 1' or 'Camera 2' that you wish to unbind.



- Press and hold the 'OK' button on the monitor until you see 'Camera Not Paired' on the screen.

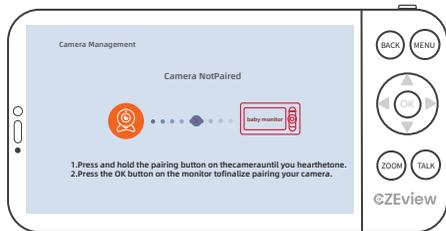

After unbinding, if the camera was not previously connected to the app, it will perform a pan/tilt check after 15 seconds, and its indicator light will start to flash red slowly. If it was already connected to the app, the camera will remain stationary, and the indicator light will stay solid blue.



! Note:

If you wish to reconnect the camera with the monitor, please follow the steps outlined in 'CONNECTING THE CAMERA TO THE MONITOR'.


CAMERA SELECTION METHOD (FOR DUAL-CAMERA BABY MONITORS ONLY)

The Dual-Camera Baby Monitor supports simultaneous live viewing from both cameras. To zoom in or out on a specific camera, it's necessary to select that camera first.

From the home screen, use the Zoom button  to alternate between Camera 1 and Camera 2 views.



To zoom, select the desired camera by pressing the 'OK' button  on the monitor. This action switches the view to full-screen mode for the selected camera, enabling the zoom function.



! Note:

To exit full-screen viewing mode and return to dual-screen mode, press the back button.

NIGHT VISION

When the camera lens is obstructed or there are obstructions near the lens, it can cause the night vision image to be blurry and whitened. Please use the pan/tilt function to adjust the direction of the camera until the quality of the night vision image returns to normal.



SAFETY PROTECTION

Adjust the Wi-Fi network channel for your privacy needs by turning it ON or OFF.

Press 'Menu' (MENU) on the monitor and select  > 'Safety Protection' .

- Disable the Wi-Fi network channel to keep live view videos private and inaccessible through the network.
- Once enabled, remotely monitor your baby and enjoy additional features offered by the APP. Access all visit records securely protected at home with AES 256-bit data encryption.



SET UP THE SYSTEM

• DOWNLOAD APP

Download 'CZEView' or 'Elemage Cam' from the App store (ios) or coogle Play (Android) or scan the QR code below.



• REGISTER AND LOG IN TO YOUR ACCOUNT.

Launch the app, register an account with a valid email address at your first use, then log in.

Note:

1. Please allow the app access to your WLAN & Cellular Data for a successful connection;
2. Please allow the app to access push messages for detection notifications.

SET UP THE CAMERA ON THE APP

• Before starting, please note:


1. Ensure the camera is on and press the 'RESET' button for 5 seconds until the indicator light flashes red, signaling it's ready for WiFi connection.
2. The monitor will be offline during WiFi setup, resuming once the app connects to the camera successfully.
3. Confirm 'CZView' or 'Elemage Cam' app is downloaded.
4. Select the correct device type and model when adding a device.
5. Check for a stable network and keep the camera and mobile device close to the router during setup.
6. Please enter the correct password according to the instruction manual, ensuring it contains between 8 and 32 characters for a seamless Wi-Fi connection.
7. Avoid using emojis, special characters, or symbols in your WiFi name and password. Public networks (like in apartments, subways, airports, hotels, etc.) are not recommended.
8. Networks requiring web authentication are not supported.
9. WiFi networks with hidden hotspot names are not supported; ensure your hotspot name is visible.
10. VPNs or Proxy Servers are not compatible.

I. METHOD 1 CONNECT VIA BLUETOOTH ENABLED (RECOMMENDED)


! Note:


Please allow the app to access your Bluetooth and Location services to guarantee a successful connection.

1. On the 'Home' page, tap 'Add' or  in the upper right corner to add a device.
2. Grant the app permission to access your Bluetooth.
3. Locate your device's serial number in the list. (The serial number is located on the sticker affixed to the camera.)

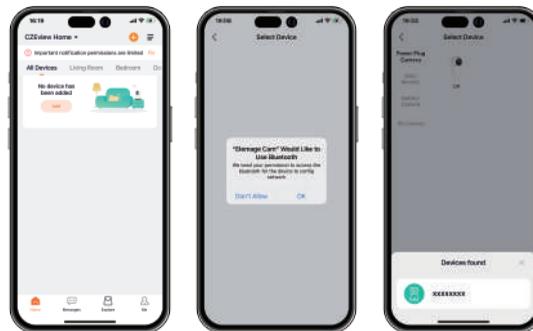

4. Select the same WiFi network your phone is connected to and enter the correct password.
5. Grant the app permission to access your Location.
6. Wait to hear a 'cuckoo' sound, signaling the start of the connection process. Then, ensure that the indicator light changes to a steady blue, which signifies the setup has been successful. Afterward, press 'Next' to assign a name to your camera.

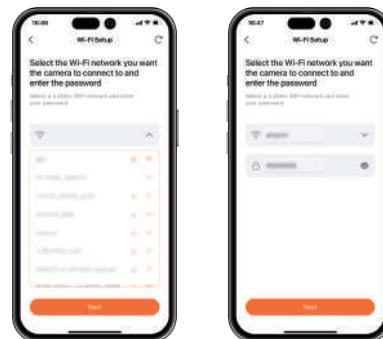

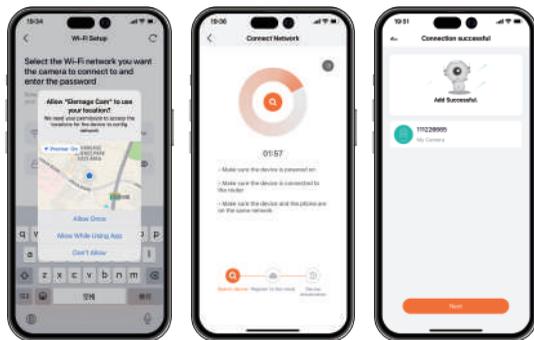

! Caution:

During the Wi-Fi setup, if the app displays a page indicating a connection failure, tap 'Re-add' in the upper left corner. Then, press and hold the 'Reset' button until you hear a 'cuckoo' sound. Ensure the indicator light changes to slow red flashes. Follow the instructions in the 'METHOD 1: CONNECT VIA BLUETOOTH ENABLED (RECOMMENDED)' section to re-add the camera to the app. Alternatively, tap the 'Other Methods' button to try a different method as outlined in 'METHOD 2: SCAN QR CODE', which is detailed in the 'IMPORTANT TIPS' section for further guidance.



IMPORTANT TIPS

For detailed instructions on 'MONITOR FUNCTION', 'SETTING UP THE CAMERA ON THE APP', 'INSTALLING THE CAMERA', 'CONTROLLING THE CAMERA WITH ALEXA', 'APP FUNCTIONS', and 'TROUBLESHOOTING', please scan the QR code provided below.



NOTICE FCC Statement:

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

! Note:

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

RF Exposure Statement:

To maintain compliance with FCC RF exposure guidelines, this equipment should be installed and operated with a minimum distance of 20 cm between the radiator and your body. This device and its antenna(s) must not be co-located or operating in conjunction with any other antenna or transmitter.



CET PRODUCT SERVICE SP. Z O.O.

Ul. Długa 33 102

Zgierz 95-100 Polen

Tel: +49 1734543507

Email: info@cetproduct.com

FCC ID: 2AZL7-ZY-BB1 (Camera)

FCC ID: 2AZL7-ZY-BM1 (Monitor)

Made in China

Manufacturer: Shenzhen CTV Int Cloud Technology Co., Ltd
Address: 501, Building A, Debaoli Industrial Park, Shangxue-
Technology City, Xinxue Community, Bantian Street,
Longgang District, Shenzhen, China



FR

Cet appareil,
ses accessoires/piles,
Piles et cordons
se recyclent

A DÉPOSER EN
MAGASIN



OU

A DÉPOSER
EN DÉCHÈTERIE




cZView

See Everthing, Miss Nothing

Wir hoffen, dass Sie es nie benötigen werden,
aber falls doch, ist unser Service
freundlich und unkompliziert.

✉ support@czeview.net

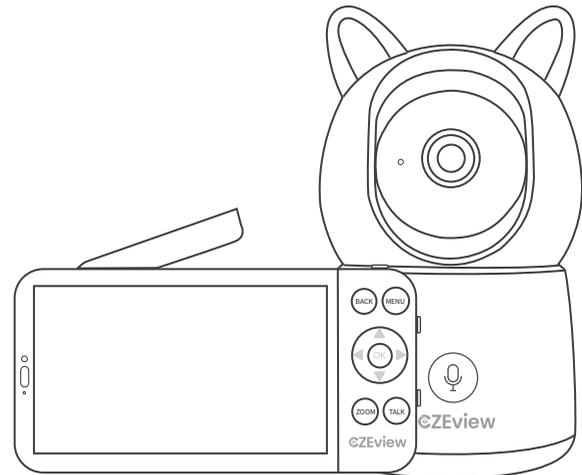

Babyphone Bedienungsanleitung

INHALT

WICHTIGE SICHERHEITSHINWEISE	P01
BATTERIE.....	P02
VORSICHTSMASSNAHMEN	P02
WAS IST ENTHALTEN	P03
PRODUKTÜBERSICHT	P04
SPEZIFIKATIONEN	P06
VORBEREITUNG	P07
VERBINDEN/TRENNEN DER	P08
KAMERA VOM MONITOR	
• DIE KAMERA MIT DEM MONITOR VERBINDEN	P08
• ENTBINDUNG DER KAMERA VOM MONITOR	P11
NACHTSICHT	P13
SICHERHEITSSCHUTZ	P13
DAS SYSTEM EINRICHTEN	P14
• APP HERUNTERLADEN	P14
• REGISTRIEREN UND IN IHREM KONTO ANMELDEN	P14
DIE KAMERA IN DER APP EINRICHTEN	P15
• METHODE 1 VERBINDUNG ÜBER	P15
BLUETOOTH AKTIVIERT (EMPFOHLEN)	
WICHTIGE TIPPS	P18
• SCANNEN SIE DEN QR-CODE FÜR DIE	P18
DETAILLIERTE BEDIENUNGSANLEITUNG	

WICHTIGE SICHERHEITSHINWEISE

- Befolgen Sie alle Warnungen und Anweisungen, die auf dem Produkt markiert sind.
- Die Einrichtung durch einen Erwachsenen ist obligatorisch.
- Dieses Produkt dient nur als Hilfe und sollte keine verantwortungsvolle und angemessene Aufsicht durch Erwachsene ersetzen.
- Nicht als medizinisches Überwachungsgerät konzipiert.
- Vermeiden Sie die Nutzung in der Nähe von Wasser, um das Risiko eines elektrischen Schlages zu verhindern.
- Verwenden Sie ausschließlich die mitgelieferten Adapter, um Schäden am Produkt zu vermeiden.
- Verwenden Sie nur vom Hersteller empfohlene Anhänge und Zubehörteile.
- Trennen Sie das Gerät vor der Reinigung von der Stromquelle. Vermeiden Sie flüssige Reinigungsmittel und verwenden Sie stattdessen ein trockenes Tuch.
- Ziehen Sie den Stecker bei längerer Nichtbenutzung.
- Halten Sie Stromkabel frei von Hindernissen und stellen Sie sicher, dass sie keine Stolpergefahr darstellen.
- Betreiben Sie das Gerät ausschließlich mit dem auf dem Produkt angegebenen Stromquellentyp.
- Vermeiden Sie die Platzierung auf instabilen Oberflächen, um Stürze zu verhindern.
- Sorgen Sie für eine angemessene Belüftung, um Überhitzung zu vermeiden. Decken Sie nie Lüftungsschlitze ab.
- Versuchen Sie nicht, das Gerät zu zerlegen. Kontaktieren Sie autorisierte Serviceeinrichtungen für Wartungsarbeiten.
- Beaufsichtigen Sie Kinder, um zu verhindern, dass sie mit dem Produkt spielen.
- Bewahren Sie kleine, abnehmbare Teile außerhalb der Reichweite von kleinen Kindern auf, um Erstickungsgefahren zu vermeiden.
- Nicht für die Nutzung durch Personen mit eingeschränkten physischen, sensorischen oder mentalen Fähigkeiten ohne angemessene Aufsicht bestimmt.

BATTERIE


- Verwenden Sie nur die spezifizierte Batterie, um Explosionsrisiken zu vermeiden.
- Vermeiden Sie die Exposition gegenüber extremen Temperaturen und Drücken, die Explosionen oder Lecks verursachen können.
- Entsorgen Sie die Batterie nicht im Feuer oder versuchen Sie nicht, sie mechanisch zu beschädigen.
- Befolgen Sie die richtigen Entsorgungsrichtlinien für gebrauchte Batterien, um Umweltschäden zu minimieren.

VORSICHTSMASSNAHMEN

- Behandeln Sie Batterien vorsichtig, um Verbrennungs-, Feuer- und Explosionsgefahren zu vermeiden.
- Schützen Sie das Produkt vor extremen Temperaturen, Sonnenlicht und Wärmequellen.
- Verhindern Sie Strangulation, indem Sie Kabel außerhalb der Reichweite von Kindern halten.
- Platzieren Sie die Kamera nicht innerhalb oder zu nah am Kinderbett oder Laufstall, um Erstickungs- und Strangulationsgefahren zu vermeiden.
- Installieren Sie die Kamera sicher außerhalb des Kinderbetts, um Verletzungen zu vermeiden.
- Achten Sie auf mögliche Störungen durch andere elektronische Geräte und positionieren Sie die Kameraeinheit entsprechend.
- Testen Sie regelmäßig die Tonwiedergabe für optimale Leistung.
- Halten Sie einen Mindestabstand von 1,5 m / 4,9 ft zwischen Monitor und Kamera, um Mikrofonrückkopplungen zu vermeiden.

WAS IST ENTHALTEN

DE



CZEView Kamera



Monitor



Netzteil



Stromkabel



Schraubenpaket



Montagehalterung



Benutzerhandbuch



Klebstoff



Reset-Stift

! Note:

Dieses Paket ist exklusiv für Käufer des Einzelkamera-Babyphones. Käufer des Zweikamera-Babyphones erhalten eine zusätzliche Kamera, ein Netzteil, ein Stromkabel, ein Schraubenpaket, eine Halterung und Klebstoff.

PRODUKTÜBERSICHT

DE

• Kamera

- Nutzen Sie den Monitor/die App, um den Lichtschalter für drei einzigartige Beleuchtungsmodi zu aktivieren.

Nachtlicht

Kontrollleuchte

Linse

SD-Kartenslot

- Unterstützt SD-Kartenspeicher bis zu 128GB.

Reset-Knopf

- Zum Zurücksetzen den Reset-Knopf 5 Sekunden lang drücken und halten.

Sprachanruf

- Drücken, um anzurufen; halten Sie gedrückt, bis ein "Kuckuck"-Ton für den Kopplungsmodus ertönt.

Mikrofon

Lautsprecher

Stromanschluss


Kontrollleuchte

Dauerhaft rotes Licht	• Gerät defekt
Langsames rotes Blinken	• Warten auf WLAN-Verbindung
Schnelle rote Blitze	• Suche nach Wi-Fi-Netzwerken
Kontinuierliches blaues Licht	• Kamera funktioniert normal
Langsame blaue Blitze	• Verbindungsaufbau zu Wi-Fi / AP-Verbindungsstatus
Schnelle blaue Blitze	• Geräte-Upgrade

VORBEREITUNG


• LOKALE ÜBERWACHUNG

Funktioniert unabhängig vom Internet, benötigt jedoch eine Micro-SD-Karte (bis zu 128GB, NICHT INBEGRIFFEN) für Aufnahme und Speicherung – dies ist optional, wenn Sie Videos oder Bilder nicht speichern müssen.

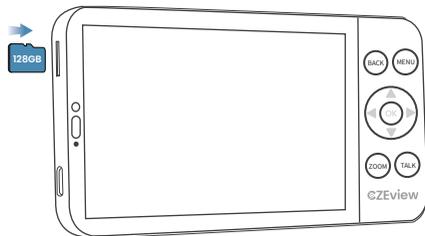

• APP-ÜBERWACHUNG

Die Fernüberwachung ist über eine App verfügbar, die ebenfalls eine Micro-SD-Karte (bis zu 128GB, NICHT INBEGRIFFEN) für die Speicherung von Videos und das Abspielen von Wiegenliedern benötigt. Eine SD-Karte ist nicht erforderlich, wenn Sie die oben genannte spezifische Funktion nicht nutzen. Für die Videospeicherung können Sie alternativ ein Cloud-Speicher-Abonnement in Erwägung ziehen.

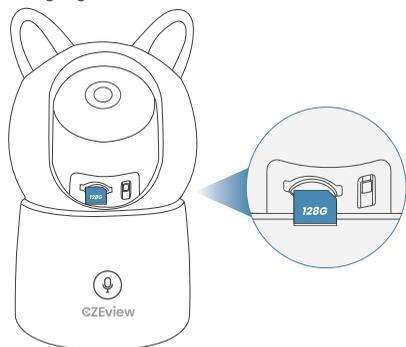


DIE KAMERA MIT DEM MONITOR VERBINDEN


Um eine reibungslose Einrichtung zu gewährleisten, beachten Sie bitte folgende Hinweise vor Beginn:

- Stellen Sie sicher, dass der Monitor vor der ersten Verwendung vollständig aufgeladen ist.
- Halten Sie einen Abstand von mindestens 1,5 Metern (ungefähr 4,9 Fuß) zwischen Monitor und Kamera, um Mikrofon-Rückkopplungen zu vermeiden.
- Für eine erfolgreiche Kopplung sollten Kamera und Monitor nicht weiter als 200 Meter (ungefähr 656 Fuß) voneinander entfernt sein.


Schalten Sie die Kamera ein.

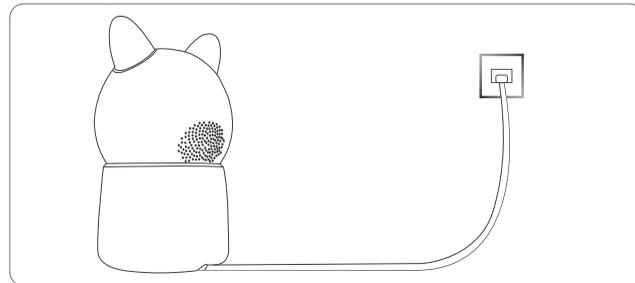


Drücken und halten Sie die Ein-/Aus-Taste am Monitor für drei Sekunden, um ihn einzuschalten.

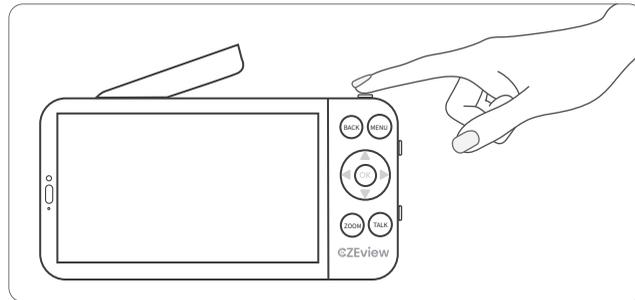

Für optimalen Empfang, ziehen Sie die Antenne des Monitors vollständig aus.

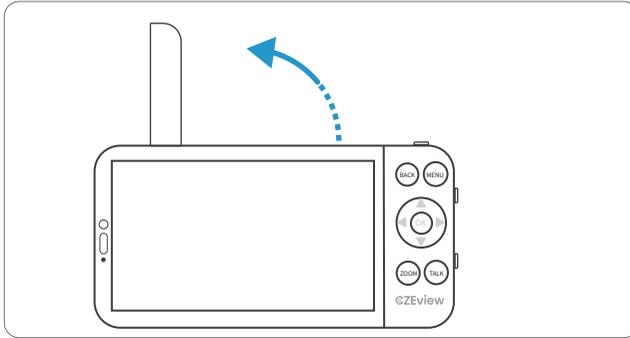


Die Kamera wird dann automatisch den Verbindungsprozess mit dem Monitor initiieren und abschließen.

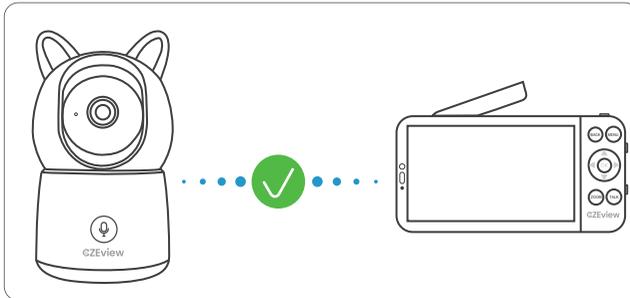


! Hinweis:

Wenn die automatische Verbindung fehlschlägt, verbinden Sie die Kamera manuell wie folgt:

1. Drücken Sie auf dem Monitor die 'Menü'-Taste .
2. Gehen Sie zu 'Einstellungen'  > 'Kamera' .
3. Wählen Sie unter 'Kameraverwaltung' 'Kamera 1' oder 'Kamera 2' zum Verbinden.
4. Halten Sie die 'Voice Call'-Taste  an der Kamera gedrückt, bis ein 'kuckuck'-Ton zu hören ist.
5. Drücken Sie 'OK'  auf dem Monitor, um die Verbindung herzustellen.

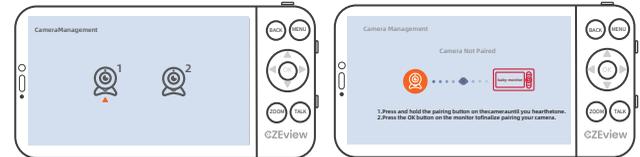

6. Ein blaues Dauerlicht an der Kamera und eine Erfolgsmeldung auf dem Monitor bestätigen die Verbindung.

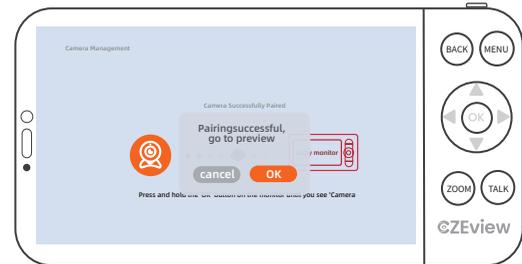


ENTBINDUNG DER KAMERA VOM MONITOR

- Drücken Sie auf dem Monitor die 'Menü'-Taste .
- Navigieren Sie zu 'Einstellungen'  > 'Kamera' .
- Wählen Sie in 'Kameraverwaltung' entweder 'Kamera 1' oder 'Kamera 2', die Sie entbinden möchten.



- Halten Sie die 'OK'-Taste auf dem Monitor gedrückt, bis auf dem Bildschirm 'Kamera nicht gepaart' angezeigt wird.

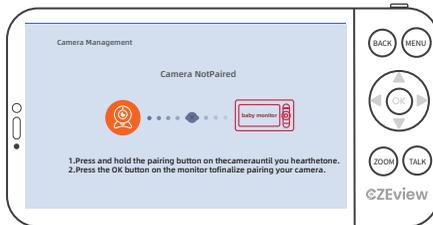

Nach der Entbindung führt die Kamera, wenn sie zuvor nicht mit der App verbunden war, nach 15 Sekunden eine Schwenk-/Neigeprüfung durch, und die Anzeileuchte beginnt langsam rot zu blinken. War sie bereits mit der App verbunden, bleibt die Kamera in Position, und die Anzeileuchte bleibt durchgehend blau.

! Hinweis:

Wenn Sie die Kamera erneut mit dem Monitor verbinden möchten, folgen Sie bitte den Anweisungen unter 'DIE KAMERA MIT DEM MONITOR VERBINDEN'.

AUSWAHLMETHODE FÜR DIE KAMERA (NUR FÜR BABY-MONITORE MIT ZWEI KAMERAS)

Der Baby-Monitor mit zwei Kameras ermöglicht die gleichzeitige Live-Ansicht beider Kameras. Um an einer bestimmten Kamera heranzuzoomen oder herauszuzoomen, müssen Sie diese zunächst auswählen.

Vom Startbildschirm aus können Sie mit der Zoom-Taste  zwischen den Ansichten von Kamera 1 und Kamera 2 wechseln.



Wählen Sie die gewünschte Kamera durch Drücken der 'OK'-Taste  am Monitor aus, was den Bildschirm in den Vollbildmodus für die ausgewählte Kamera wechselt und die Zoomfunktion aktiviert.



! Hinweis:

Um den Vollbildmodus zu verlassen und in den Dual-Bildschirm-Modus zurückzukehren, drücken Sie die Zurück-Taste.

NACHTSICHT

Wenn das Kameraobjektiv blockiert ist oder sich Hindernisse in der Nähe des Objektivs befinden, kann dies dazu führen, dass das Bild der Nachtsicht verschwommen und aufgehellt wird. Bitte verwenden Sie die Schwenk-/Neigefunktion, um die Richtung der Kamera anzupassen, bis die Bildqualität der Nachtsicht wieder normal ist.



SICHERHEITSSCHUTZ

Stellen Sie den Wi-Fi-Netzwerkkanal je nach Ihren Datenschutzbedürfnissen EIN oder AUS.

Drücken Sie 'Menü'  auf dem Monitor und wählen Sie  > 'Sicherheitsschutz' .

- Deaktivieren Sie den WLAN-Netzwerkkanal, um sicherzustellen, dass Live-View-Videos privat bleiben und nicht über das Netzwerk zugänglich sind.
- Wenn aktiviert, können Sie Ihr Baby aus der Ferne überwachen und zusätzliche Funktionen nutzen, die die APP bietet. Gleichzeitig können Sie alle Besuchsprotokolle einsehen. Mit der AES 256-Bit-Datenverschlüsselung sind Ihre Daten zu Hause sicher geschützt.



DAS SYSTEM EINRICHTEN

• APP HERUNTERLADEN

Laden Sie 'CZEView' oder 'Elemage Cam' aus dem App store (ios) oder Google Play (Android) herunter, oder scannen Sie den untenstehenden QR-Code.



• REGISTRIEREN UND IN IHREM KONTO ANMELDEN

Starten Sie die App, registrieren Sie sich bei der ersten Nutzung mit einer gültigen E-Mail-Adresse und melden Sie sich an.

Hinweis:

1. Bitte erlauben Sie der App den Zugriff auf Ihr WLAN & Mobilfunkdaten für eine erfolgreiche Verbindung;
2. Bitte erlauben Sie der App den Zugriff auf Push-Nachrichten für Erkennungsbenachrichtigungen.

DIE KAMERA IN DER APP EINRICHTEN

• Bevor Sie beginnen, beachten Sie bitte:


1. Stellen Sie sicher, dass die Kamera eingeschaltet ist und drücken Sie die 'RESET'-Taste für 5 Sekunden, bis die Anzeigeleuchte rot blinkt, was bedeutet, dass sie auf eine WiFi-Verbindung wartet.
2. Während der WiFi-Verbindung wird der Monitor offline sein, bis die App erfolgreich mit der Kamera verbunden ist.
3. Bestätigen Sie, dass die 'CZView' oder 'Elemage Cam' App heruntergeladen wurde.
4. Wählen Sie den richtigen Gerätetyp und das Modell beim Hinzufügen eines Geräts aus.
5. Überprüfen Sie das stabile Netzwerk und halten Sie die Kamera und das Mobilgerät während der Einrichtung in der Nähe des Routers.
6. Bitte geben Sie das korrekte Passwort gemäß der Bedienungsanleitung ein. Stellen Sie sicher, dass es zwischen 8 und 32 Zeichen enthält, um einen reibungslosen Wi-Fi-Verbindungsprozess zu gewährleisten.
7. Vermeiden Sie die Verwendung von Emojis, Sonderzeichen oder Symbolen in Ihrem WLAN-Namen und Passwort. Öffentliche Netzwerke (wie in Wohnungen, U-Bahnen, Flughäfen, Hotels usw.) werden nicht empfohlen.
8. Netzwerke, die eine Webauthentifizierung erfordern, werden nicht unterstützt.
9. WLAN-Netzwerke mit verborgenen Hotspot-Namen werden nicht unterstützt; stellen Sie sicher, dass Ihr Hotspot-Name sichtbar ist.
10. VPNs oder Proxy-Server sind nicht kompatibel.

I. METHODE 1 VERBINDUNG ÜBER BLUETOOTH AKTIVIERT (EMPFOHLEN)


! Hinweis:


Bitte erlauben Sie der App den Zugriff auf Ihre Bluetooth- und Standortdienste, um eine erfolgreiche Verbindung zu gewährleisten.

1. Auf der 'Startseite', tippen Sie auf 'Hinzufügen' oder das  in der oberen rechten Ecke, um ein Gerät hinzuzufügen.
2. Erteilen Sie der App die Erlaubnis, auf Ihr Bluetooth zuzugreifen.
3. Finden Sie die Seriennummer Ihres Geräts in der Liste. (Die Seriennummer befindet sich auf dem Aufkleber, der an der Kamera angebracht ist.)

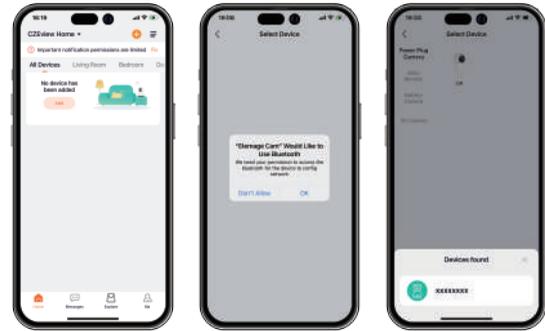

4. Wählen Sie dasselbe WLAN-Netzwerk, mit dem Ihr Telefon verbunden ist, und geben Sie das richtige Passwort ein.
5. Erteilen Sie der App die Erlaubnis, auf Ihren Standort zuzugreifen.
6. Warten Sie, bis Sie ein 'Kuckuck'-Geräusch hören, was den Beginn des Verbindungsprozesses signalisiert. Stellen Sie dann sicher, dass das Kontrolllicht zu einem beständigen Blau wechselt, was auf eine erfolgreiche Einrichtung hinweist. Drücken Sie danach auf 'Weiter', um Ihrer Kamera einen Namen zu geben.

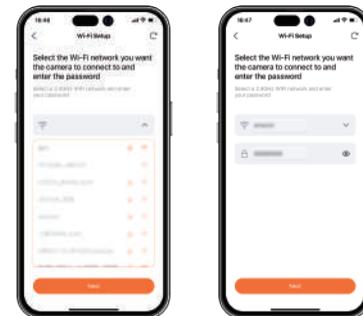

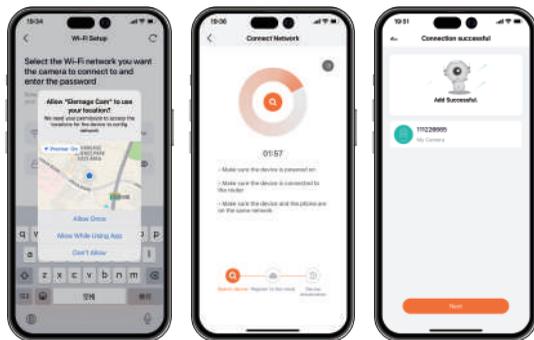

! Vorsicht:

Während der WLAN-Einrichtung, wenn die App eine Seite anzeigt, die auf einen Verbindungsfehler hinweist, tippen Sie in der oberen linken Ecke auf 'Erneut hinzufügen'. Halten Sie dann die 'Reset'-Taste gedrückt, bis Sie ein 'Kuckuck'-Geräusch hören. Stellen Sie sicher, dass die Anzeigeleuchte auf langsame rote Blitze wechselt. Befolgen Sie die Anweisungen im Abschnitt 'METHODE 1 VERBINDUNG ÜBER BLUETOOTH AKTIVIERT (EMPFOHLEN)', um die Kamera erneut zur App hinzuzufügen. Oder tippen Sie auf die Schaltfläche 'Andere Methoden', um eine andere Methode auszuprobieren, wie im Abschnitt 'METHODE 2 QR-CODE SCANNEN' beschrieben, den Sie im Abschnitt 'WICHTIGE TIPPS' für weitere Anleitungen finden.



WICHTIGE TIPPS

Für detaillierte Anweisungen zu 'MONITORFUNKTION', 'DIE KAMERA IN DER APP EINRICHTEN', 'INSTALLIEREN DER KAMERA', 'STEUERN DER KAMERA MIT ALEXA', 'APP-FUNKTIONEN' und 'FEHLERBEHEBUNG', scannen Sie bitte den unten bereitgestellten QR-Code.

