

# PYLEPRO

PyleUSA.com

# PYLE

PyleUSA.com



VISIT US ONLINE:

*Have a question?*

*Need service or repair?*

*Want to leave a comment?*

[PyleUSA.com/ContactUs](http://PyleUSA.com/ContactUs)

PYLE





## PCAU46BA

### Audio Speaker Power Amplifier System

2x120 Watt Digital Amp w/ Headphone Jack, MP3/USB/  
SD/MMC Card Reader/FM Radio/Wireless BT Receiver  
w/AUX, CD Inputs & Blue LED Display

## USER MANUAL

## Features and Controls

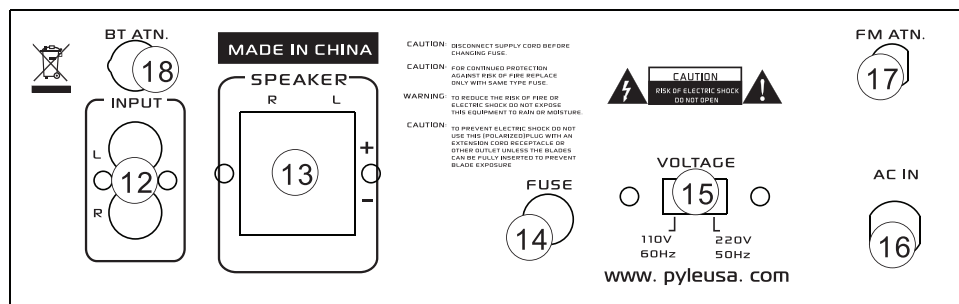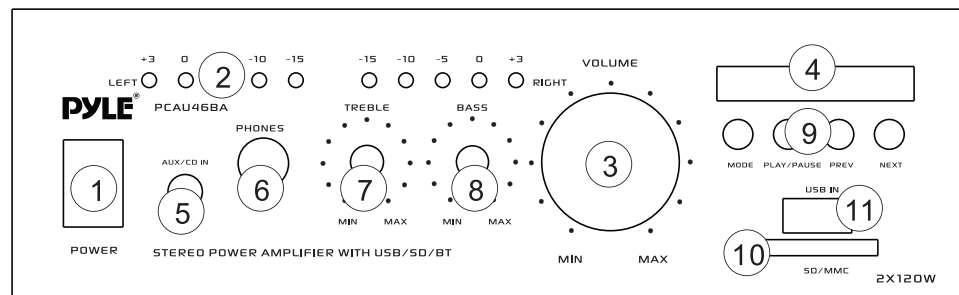


1. **Power ON LED Indicator:** Lights to indicate power is turned on.
2. **Blue LED Output Level Display**
3. **Master Volume Control:** Lets you adjust the overall sound level, turn the knob clockwise to increase the volume.
4. **Function Blue LED Display Window**
5. **AUX/CD IN:** Lets you easily connect the computerized MP3 Device (player) sources, such as PC (CD ROM), laptop, Walkman, iPod, and cell phone.
6. **1/4" PHONE JACK:** Accept headphones with 1/4" plug.
7. **TREBLE:** Lets you adjust the TREBLE volume to high or low.
8. **BASS:** Lets you adjust the BASS volume to high or low.
9. **Buttons for MP3(USB/SD/MMC) Function Control**
  - Mode: For audio input selection.
  - Play/Pause: Play and pause control.
  - Prev./Next: Quick backward or next song.
10. **SD/MMC:** Socket for playing SD/ MMC cards
11. **USB:** Socket for playing the USB function.

12. **RCA L/R LINE Input:** Let you connect to the desired LINE input source
13. **Push Type Speaker L/R Terminals:** Let you easily connect the speakers' wires directly to the amplifier.
14. **Fuse:** The amplifier uses a fuse for protection against surges and short circuit. If the amplifier suddenly turn off and will not turn on, check the fuse. If necessary, replace it with a 1- amp, 250-volt, fast-acting, 5x20mm fuse (not supplied)
15. **110V/220V Switch:** According to power voltage, push this button to the correct station of the 110V or 220V.
16. **AC IN PowerCord:** Connect to AC 110V/60Hz or 220V/50Hz
17. **FM ANTENNA CONNECTOR:** Connect for FM antenna; please connect it when using FM Radio inputs.
18. **WIRELESS BT ANTENNA:** Please pull the antenna out when using Wireless BT input.

## REMOTE CONTROL

1. Press this button to turn on the MP3.
2. When in FM mode, press this two buttons to select previous or next station.
3. Press these two buttons to select the previous or next track in USB or SD or BT mode.
4. Volume up or down.
5. Press the numbers to select the tracks directly. The Unit takes 1-2 seconds to response
6. Press this button to select the different repeat mode.
7. Press this button to select the playing mode, such as USB/SD/ FM/BT/LINE
8. EQ function
9. Play and pause function for MP3 and BT.

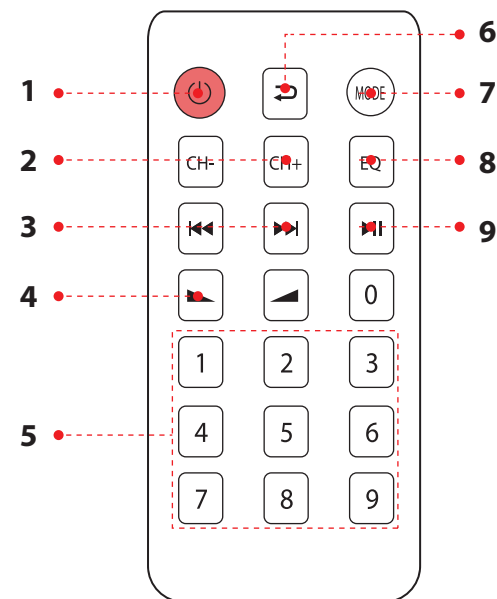

## CARE AND MAINTENANCE

Your Pyle Pro Amplifier is an example of superior design and craftsmanship. The following suggestions will help you care for your amplifier so you can enjoy years of use.

- Keep the amplifier dry. If it gets wet, wipe immediately.
- Use the amplifier only in well ventilated installations.
- Handle the amplifier gently and carefully! DO NOT DROP!
- Keep the amplifier away from dust and dirt.
- Wipe occasionally with a damp cloth to keep it looking new.

**DO NOT Use harsh chemicals, solvents or detergents!**

### PCAU46BA

#### Audio Speaker Power Amplifier System

2x120 Watt Digital Amp w/ Headphone Jack, MP3/USB/SD/MMC Card Reader/FM Radio/Bluetooth Receiver w/AUX, CD Inputs & Blue LED Display

#### Features:

- 1/4" Headphone Jack
- 2 x 120 Watt Peak at 4-Ohm
- Blue LED Display for Media Playback Information
- Double Decoder Digital Media Function with Remote Control
- Built-in USB/SD Memory Card Readers
- Compatible with MP3/WMA Files
- FM Radio
- Bluetooth Receiver
- Blue LED Output Level Indicators
- Power On/Off Switch LED Indicator
- Bass, Treble, Master and Volume Controls
- RCA Cable L/R Input, Four Push Type Speaker L/R Terminals
- Fuse for protection against Surges and Short Circuit
- Connect More Audio/Computer Devices via 3.5mm to RCA Converter
- Bluetooth external antenna
- Bluetooth Network Name: 'PyleUSA'

#### Technical Specs:

- Battery Operated Remote, Requires (1) x CR-2025 Button Cell Battery, Included
- AUX Input Jack for iPod/iPhone/iPad/CD/MP3 Players: 3.5mm/1/8"
- Compatible with Audio/Computer (Device MP3 Players) Via 3.5mm to RCA Converter
- AC IN Power Cord - Connect to AC 110V/60Hz or 220V/50Hz
- Frequency Response: 20Hz-20 kHz
- Voltage Selector: 120/240V
- Product Dimension ( L x W x H): 5.39" x 2.87" x 8.41" -inches



#### Questions? Issues?

We are here to help!  
Phone: (1) 718-535-1800  
Email: [support@pyleusa.com](mailto:support@pyleusa.com)



WARNING:

This product can expose you to a chemical or group of chemicals, which may include "Nickel Carbonate" which is known in the state of California to cause cancer, birth defects, or other reproductive harm. For more info, go to <https://www.p65warnings.ca.gov/>.