


中





Monster Maxstar MQT39
真无线 蓝牙耳机
使用说明书


产品参数


- 蓝牙版本----- V6.0
- 传输距离----- ≥10m
- 喇叭直径----- Φ13mm
- 喇叭阻抗----- 32Ω±15%
- 灵敏度----- 115±3dB
- 频率范围----- 20Hz-20KHz
- 电池容量 (充电盒)----- 230mAh 3.7V
- 电池容量 (耳机)----- 30mAh 3.7V
- 充电时间 (充电盒)----- ≈1.5小时
- 播放时间 (耳机)----- ≈5小时
- 配合充电盒播放时间----- ≈24小时

包装清单


 耳机 *2

 使用说明书 *1


 充电盒 *1

 Type-C充电线 *1

产品示意图




指示灯
功能触摸键 (MFB)
耳机
充电触点



Type-C
充电盒

给充电盒充电

用Type-C充电线连接充电盒到5V电源适配器。



额定输入: 5V==30mA(耳机) 额定输入: 5V==230mA(充电盒)

温馨提示: 当关闭充电盒盖, 充电盒指示灯呈蓝色, 请给充电盒充电。


指示灯指南

模式	描述	语音提示
开机	耳机白色指示灯闪烁3次	"Power on"
关机	耳机白色指示灯长亮1秒熄灭	"Power off"
配对	耳机白色指示灯闪烁	"Pairing"
连接	耳机指示灯熄灭	"Connected"
断开	主耳白灯闪烁, 副耳熄灭	"Disconnected"
耳机低电	耳机白色指示灯快闪	"Battery low"
充电盒给耳机充电	耳机白色指示灯长亮	—
充电盒低电	充电盒白色指示灯闪烁	—
充电盒充电	充电盒白色指示灯闪烁	—
充电盒充满	充电盒白色指示灯长亮	—


耳机佩戴指引




第一步
将耳机从充电盒中取出。



第二步
使用图示方式, 大拇指和食指按住耳机杆两侧利用中指推开前后耳耳面盖部分保持该状态。



第三步
右耳为例, 耳机两边面盖分别夹住耳道两侧, 如图所示调整至耳道中下部位置, 让喇叭出声孔对齐耳道, 左耳同理。



第四步
以右耳为例, 戴好耳机, 即可享受音乐。

产品操作说明

1. 开机

方式一: 充电盒开盖, 耳机自动开机。
方式二: 长按左/右耳机的MFB按键约3秒, 耳机开机。


2. 关机

方式一: 将耳机放回充电盒中关上盖子, 耳机自动关机。
方式二: 与蓝牙设备断开连接3分钟后, 自动关机。

3. 配对

步骤一: 充电盒开盖, 耳机自动开机。
步骤二: 打开智能设备的蓝牙列表, 搜索 "Monster Maxstar MQT39" 进行配对, 连接成功后, 你会听到提示音 "Connected"


* 超出距离, 在断开连接3分钟内, 回到有效距离, 自动连接设备。

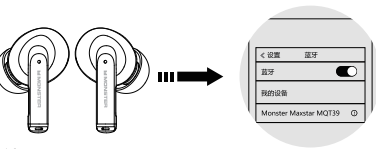



步骤一: 长按2秒左/右耳机MFB
步骤二: 长按2秒左/右耳机MFB
步骤三: 长按2秒左/右耳机MFB

触控操作


常规模式


 语音助手: 长按2秒左耳机MFB


 音量加: 单击右耳机MFB

 音量减: 单击左耳机MFB


音乐播放模式


 暂停/播放: 双击左/右耳机MFB


 上一曲: 三击左耳机MFB

 下一曲: 三击右耳机MFB


电话免提


 接听: 双击左/右耳机MFB

 挂断: 双击左/右耳机MFB

 拒接: 长按2秒左/右耳机MFB

音乐模式/游戏模式切换: 已连接设备

 音乐模式: 长按2秒右耳机MFB进入音乐模式

 游戏模式: 长按2秒右耳机MFB进入游戏模式

恢复出厂设置

1. 耳机开机后未与蓝牙设备配对状态下, 左/右耳机配对成功, 连击左/右耳机5次后左/右耳机关机 (清除配对和连接的所有信息)

2. 开机连接状态, 左/右耳机连击5次, 35s内长按10s后关机 (清除配对和连接的所有信息)。

注意

1. 充电盒开盖后, 不需按任何按键, 耳机自动开机。配对并连接耳机后放入充电盒并合盖后, 充电盒将自动给耳机充电, 耳机关机。

2. 常清洁, 寿命长, 如长期不用, 建议15天充电1次, 延长电池寿命, 耳机脱离充电盒部分经常用棉签酒精擦拭, 能够避免充电不畅, 避免接触不良, 影响使用体验。

3. 电池/电池组或电池组合不得暴露在明火、烘箱或类似过热的环境中; 禁止拆解、撞击、挤压或投入火中, 若出现严重膨胀, 切勿继续使用; 切勿置于高温环境中; 请勿禁止使用。

4. 由于本产品采用无线连接方式, 在日常使用过程中, 受到环境、手机品牌、使用行为等因素影响, 可能在播放音乐过程中, 会出现短暂、轻微的声音卡顿属于正常现象。

警告

1. 长时间以高音量使用耳机可能会损害听力, 建议只使用适当音量收听、通话和听音乐。

2. 请不要中洗或将产品浸入水中, 以免造成故障。

3. 不要自行拆卸产品及配件, 以免造成损坏及保修失效。

4. 请勿使产品受到强烈冲击或震动以免损坏。

5. 请勿使用有机溶剂或清洁剂清洗本产品。

Name of the Parts 部件名称		Hazardous Substances 有害物质					
	Pb 铅	Hg 汞	Cd 镉	Cr(VI) 六价铬	PBB 多溴联苯	PBDE 多溴二苯醚	
Housing 外壳	0	0	0	0	0	0	0
Loudspeakers 喇叭(单元)	0	0	0	0	0	0	0
PCBA 电路板组件	X	0	0	0	0	0	0
Accessories 电源线、连接线	X	0	0	0	0	0	0

This table is compiled according to SJ/T 11364.
本表格依据SJ/T 11364的规定编制。

0: Indicates that this hazardous substance contained in all of the homogeneous materials for this part is below the limit requirement in GB/T 26572.
0: 表示该有害物质在该部件所有均质材料中的含量均在 GB/T 26572 标准规定的限值以下。

X: Indicates that this hazardous substance contained in at least one of the homogeneous materials used for this part is above the limit requirement in GB/T 26572.
X: 表示该有害物质至少在该部件的某一均质材料中的含量超过 GB/T 26572 标准规定的限值要求。

保修卡

尊敬的客户, 本保修卡是您将来申请保修的凭证, 请配合销售商填写并妥善保管备用!

用户信息

用户姓名

电子邮件

联系电话

邮政编码

通讯地址

产品信息

产品名称

产品型号

产品条码/编号/批号

销售商信息

名称

地址

联系电话

邮政编码

销售日期


发票号码

备注

M MONSTER 合格证

产品编号: _____
生产日期: _____
销售商: _____

英





Monster Maxstar MQT39
True wireless Bluetooth headphone
instruction manual


Product parameters


- Bluetooth version----- V6.0
- Transmission distance----- ≥10m
- Driver diameter----- Φ13mm
- Driver Impedance----- 32Ω±15%
- sensitivity----- 115±3dB
- Frequency response----- 20Hz-20KHz
- Battery capacity(Charging case)----- 230mAh 3.7V
- Battery capacity(Headphone)----- 30mAh 3.7V
- Charging time(Charging case)----- ≈1.5hours
- Music playtime(Headphone)----- ≈5 hours
- Music playtime with charging case----- ≈24 hours

Product Schematic Description


 Headphone*2

 Instructions Manual*1


 Charging case*1

 Type-C Charging cable*1

Product Schematic Description




Light
Function touch keys (MFB)
Headphone
Charge electrocution



Type-C
Charging case

Charge the charging case

Connect the charging case to the 5V power adapter with Type-C charging cable.



Rated input: 5V==30mA(Headphone) Rated input: 5V==230mA(Charging case)

Tips: When the lid of the charging case is closed, the indicator light of the charging case is blue, please charge the charging case.


Indicator guide

Mode	Describe	Sound prompt
Power On	White indicator of the earbuds flashes 3 times	"Power on"
Power Off	White indicator light of the earbuds stays on for 1 second and turns off	"Power off"
Pairing	White indicator of the earbuds flashes	"Pairing"
Connected	Headset indicator is off	"Connected"
Disconnected	White light of the main ear flashes, and the secondary ear goes out	"Disconnected"
Low Battery	White indicator light of the earbuds flashes quickly	"Battery low"
Headphones placed in charging case	White indicator light of the earbuds is always on	—
Charging case low power	Blue indicator of the charging case flashes	—
Charging case charged	White indicator of the charging case flashes	—
Charging case fully charged	The charging case's white indicator light stays on	—


Headset Wearing Instructions




Step 1
Take the earbuds out of the charging case.



Step 2
Using the illustrated method, the thumb and index finger hold both sides of the earphone stem, and use the middle finger to push open the front and rear earphone cover ports to maintain this state.



Step 3
For example, the right earbud covers on both sides of the ear and adjusted to the middle and lower position of the ear as shown in the figure, so that the sound hole of the speaker is aligned with the ear canal, and the same is true for the left ear.



Step 4
Take the right ear as an example, clip the earphone, and enjoy the music.

Product operating instructions

1. Power on

Method 1: When the charging case is opened, the earphones will automatically power on.
Method 2: Long press the MFB button of the left/right headset for about 3 seconds to power on the headset.


2. Power off

Method 1: Put the earbuds back into the charging case and close the lid, and the earbuds will power off automatically.
Method 2: The device automatically shuts down after 3 minutes of disconnection from the Bluetooth device.

3. Pairing

Step one: Open the lid of the charging case, and the earbuds will automatically turn on.
Step two: Open the Bluetooth list of smart devices, search for "Monster Maxstar MQT39" to pair, and the connection is successful. After that, you will hear the "Connected" tone


* Headphones will try reconnecting to the device within 3 minutes when connection is lost.

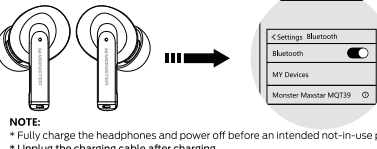



NOTE:
* Fully charge the headphones and power off before an intended not-in-use period.
* Unplug the charging cable after charging.

Operation


Normal


 Voice Assistant: Press and hold left MFB for 2 S


 Volume ++: Click right MFB

 Volume --: Click left MFB


Music playback


 Pause/Play: Double click Left/Right MFB


 Last song: Three hits left MFB

 Next song: Three hits right MFB


Phone


 Answer: Double click the left/right MFB

 Hang up: Double click the left/right MFB

 Reject: Long press left/right MFB for 2 S

Music Mode/Game Mode Switching: Connected device

 Music Mode: Press and hold the right earphone MFB for 2 seconds to enter music mode

 Game Mode: Press and hold the right earphone MFB for 2 seconds to enter the game mode

Restore factory settings

1. When the earbuds are not paired with the Bluetooth device after powering on, the left/right earbuds are paired successfully, and the left/right earbuds are doubled 5 times after the left/right earbuds are tapped Powered off (clears all information about pairing and connection)

2. Power on connection status, left/right earphone tap 5 times in a row, press and hold for 10S within 3S and then power off (clear all information of pairing and connection).

Precautions

1. Take out the earphone from the charging box, without pressing any button, the earphone will automatically turn on, connect or pair, put the earphone into the charging box, and the charging box will automatically charge your headphones. Turn them off.

2. Often clean, long life, if not used for a long time, it is recommended to charge once every 15 days to extend battery life, and the charging part of the headset is often used with cotton swabs. Alcohol wipe, can help smooth charging, avoid bad contact, affect the use experience.

3. The battery (battery pack or battery combination) shall not be exposed to lightning, baking or similar overheating environment; Do not disassemble, knock, squeeze or throw in the fire, if there is serious swelling, do not continue to use; Do not place in high temperature environment; Do not use after soaking water.

4. Because this product adopts wireless connection mode, it is affected by environment, mobile phone brand, usage behavior and other factors in daily use, it may be normal to have a brief, slight sound delay during the playing of music.

Warnings

1. Do not use headphones at high volume for an extended period of time.

2. Keep the headphones away from dust and water.

3. Do not disassemble the headphones and accessories, otherwise warranty will be voided.

4. Keep headphones away from any impact or vibration.

5. Do not use any chemical solvents or cleaning agent on the headphones.

Name of the Parts		Hazardous Substances					
	Pb	Hg	Cd	Cr(VI)	PBB	PBDE	
Housing	0	0	0	0	0	0	0
Loudspeakers	0	0	0	0	0	0	0
PCBA	X	0	0	0	0	0	0
Accessories	X	0	0	0	0	0	0

This table is compiled according to SJ/T 11364
0: Indicates that this hazardous substance contained in all of the homogeneous materials for this part is below the limit requirement in GB/T 26572.
X: Indicates that this hazardous substance contained in at least one of the homogeneous materials used for this part is above the limit requirement in GB/T 26572.

Warranty Service

Dear user, this warranty card is the proof of your future warranty application, please cooperate with the seller to fill it out and keep it for future use!

User info

User name

Email

Contact number

Postal code

Mailing address

Product information

Product name

Product number

Product barcode / Serial number / Batch number

Vendor information

Name

Address

Contact number

Postal code

Sales date

Invoice number

Remark

M MONSTER Certificate of Approval

Product No.: _____
Production Time: _____