

# LSA800-002 Loudspeaker Amplifier ASM-LSA800 Installation and Operation Manual Supplement

This supplement contains installation and operation information that is unique to the LSA800-002 Loudspeaker Amplifier. Installation and operation information common to the LSA800-001 base unit can be found in the ASM-LSA800 Installation and Operation Manual.

Prepared By:



Checked By:



Adam Pembleton Designer 13-Feb-2024 Approved By:



Johnathon White Program Manager 13-Feb-2025

# **Section 1.0 Description**

The LSA800-002 Loudspeaker Amplifier is identical to the LSA800-001 with the following exception:

 The rated speaker output level is 28.3 Vrms into 4 Ohms instead of 34.65 Vrms into 3 Ohms

## **Section 2.0 Installation**

For installation information and drawings, see ASM-LSA800 Section 2.0. Select the appropriate revision of the drawing for the serial number of the unit. The drawings specific to this derivative are listed below and can be found at the end of this supplement.

## 2.1 Installation Drawings

DOCUMENT NO.	REV.	DESCRIPTION	TYPE	SERIAL NO.
LSA800-002-403-0	1.01	Loudspeaker Amplifier	Interconnect	111699 and up
LSA800-002-405-0	1.00	Loudspeaker Amplifier	Connector Map	111699 and up
LSA800-002-922-0	1.00	Loudspeaker Amplifier	Mechanical Installation	111699 and up

## **Section 3.0 Operation**

For operational information, see ASM-LSA800 Section 3.0.

**End of Supplement** 

August 16, 2024 Rev: 1.01 Page 1

 REVISIONS

 REV
 DESCRIPTION
 DATE
 BY

 1.01
 ECO 1232 - PINS D & E INTERCHANGED ON LS800-34xx CONNECTOR
 13-FEB-2025
 AMP

#### LSA800-002 INSTALLATION NOTES

### NOTES:

1. ALL WIRES SHOULD BE 22 AWG UNLESS OTHERWISE SPECIFIED. ALL UNSHIELDED WIRE SHALL BE SELECTED IN ACCORDANCE WITH AC43.13-1B CHANGE 1, PARAGRAPHS 11-76 THROUGH 11-78. WIRE TYPES SHOULD BE TO MIL-W-22759 AS SPECIFIED IN AC43.13-1B CHANGE 1, PARAGRAPHS 11-85, 11-86 AND LISTED IN TABLE 11-11. ALL SHIELDED WIRE/CABLE SHOULD BE IN ACCORDANCE WITH

MIL-C-27500.

2. CABLE LENGTH NOT TO EXCEED 30 FT [9.14 M], UNLESS OTHERWISE SPECIFIED.

CABLE LENGTH NOT TO EXCEED 1 FT [0.3 M].

SYSTEM CROSSTALK MAY BE EFFECTED BY STYLE OF HEADSET AND JACK. CHECK SPECIFICATIONS AND SYSTEM REQUIREMENTS BEFORE SELECTING AND INSTALLING SAME.

OPTIONAL. PARALLEL TO HEADPHONE (1 ONLY) CONNECTION FOR MONITORING RADIOS VIA EXTERNAL P.A. SPEAKER.

CABLE LENGTH NOT TO EXCEED 3.3 FT [1.0 M].

SHIELD LENGTH NOT TO EXCEED 1 FT [0.3 M]. SPEAKER OUTPUT WIRES TO BE BUNDLED AND ROUTED SEPERATELY FROM LOW LEVEL AUDIO INPUT LINES.

riangle no connection in the aircraft.

SWITCHED TO POWER GROUND WHEN ACTIVE. CURRENT (SINK) 0.4A MAX.

THE LS800-34xx LOUDSPEAKER CAN ONLY BE USED WITH THE LSC22-1xx LOUDSPEAKER CONTROLLER AND LSA800-002 AMPLIFIER.

#### **DEFINITIONS:**

N/C: NO CONNECTION. THE PIN IS NOT CONNECTED TO ANYTHING

INTERNALLY, AND THEREFORE SHALL HAVE NO CONNECTION EXTERNALLY.

N/C SPARE: NO CONNECTION INTERNALLY, BUT A SPARE WIRE SHALL BE

INSTALLED IN THE WIRE HARNESS.

RESERVED: MAY BE CONNECTED AND USED IN THE FUTURE.

THE CIRCUITRY MAY BE PRESENT OR ADDED TO ACTIVATE THE FUNCTION.

THE PIN MAY BE USED FOR TEST PURPOSES.


THERE IS NO EXTERNAL CONNECTION.

RESERVED SPARE: RESERVED, BUT INSTRUCTIONS SHALL BE FOLLOWED TO ACTIVATE

(RSV SP) THE CIRCUITRY. A SPARE WIRE SHALL BE INSTALLED IN

THE WIRE HARNESS.

DRAWN	NAME LAC/AJV	10-Apr-2024	UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES TOLERANCES:			ANODYNI ELECTRO MANUFA			NA BC CANADA (250)-763-1088 EM-CORP.COM
CHECKED	Tall Day	13-Feb-2025	FRACT <b>I</b> ONAL ± 0.5 Deg ANGULAR: MACH ± BEND ±	TITLE:					
APPROVED	11 /w	13-Feb-2025	TWO PLACE DECIMAL ± 0.01 THREE PLACE DECIMAL ± 0.005	111221		LHS4x	LOUDHAILER SYS	TEM	
PROPRIETARY AND CONFIDENTIAL INTERPRET GEOMETRIC TOLERANCING PER:			TITLE						
drawing is the sole property of		mater <b>i</b> al N/A	SIZE CAGE CODE PART No.					REV	
ANODYNE ELECTRONICS MANUFACTURING. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF ANODYNE ELECTRONICS MANUFACTURING IS PROHIBITED.		,	Α	L90	15	LSA800-002		1.01	
		DO NOT SCALE DRAW <b>i</b> ng	SCALE	SCALE: 1:1 DRAWING No.: 4		No.: 403-0	SHEET 1	of 2	

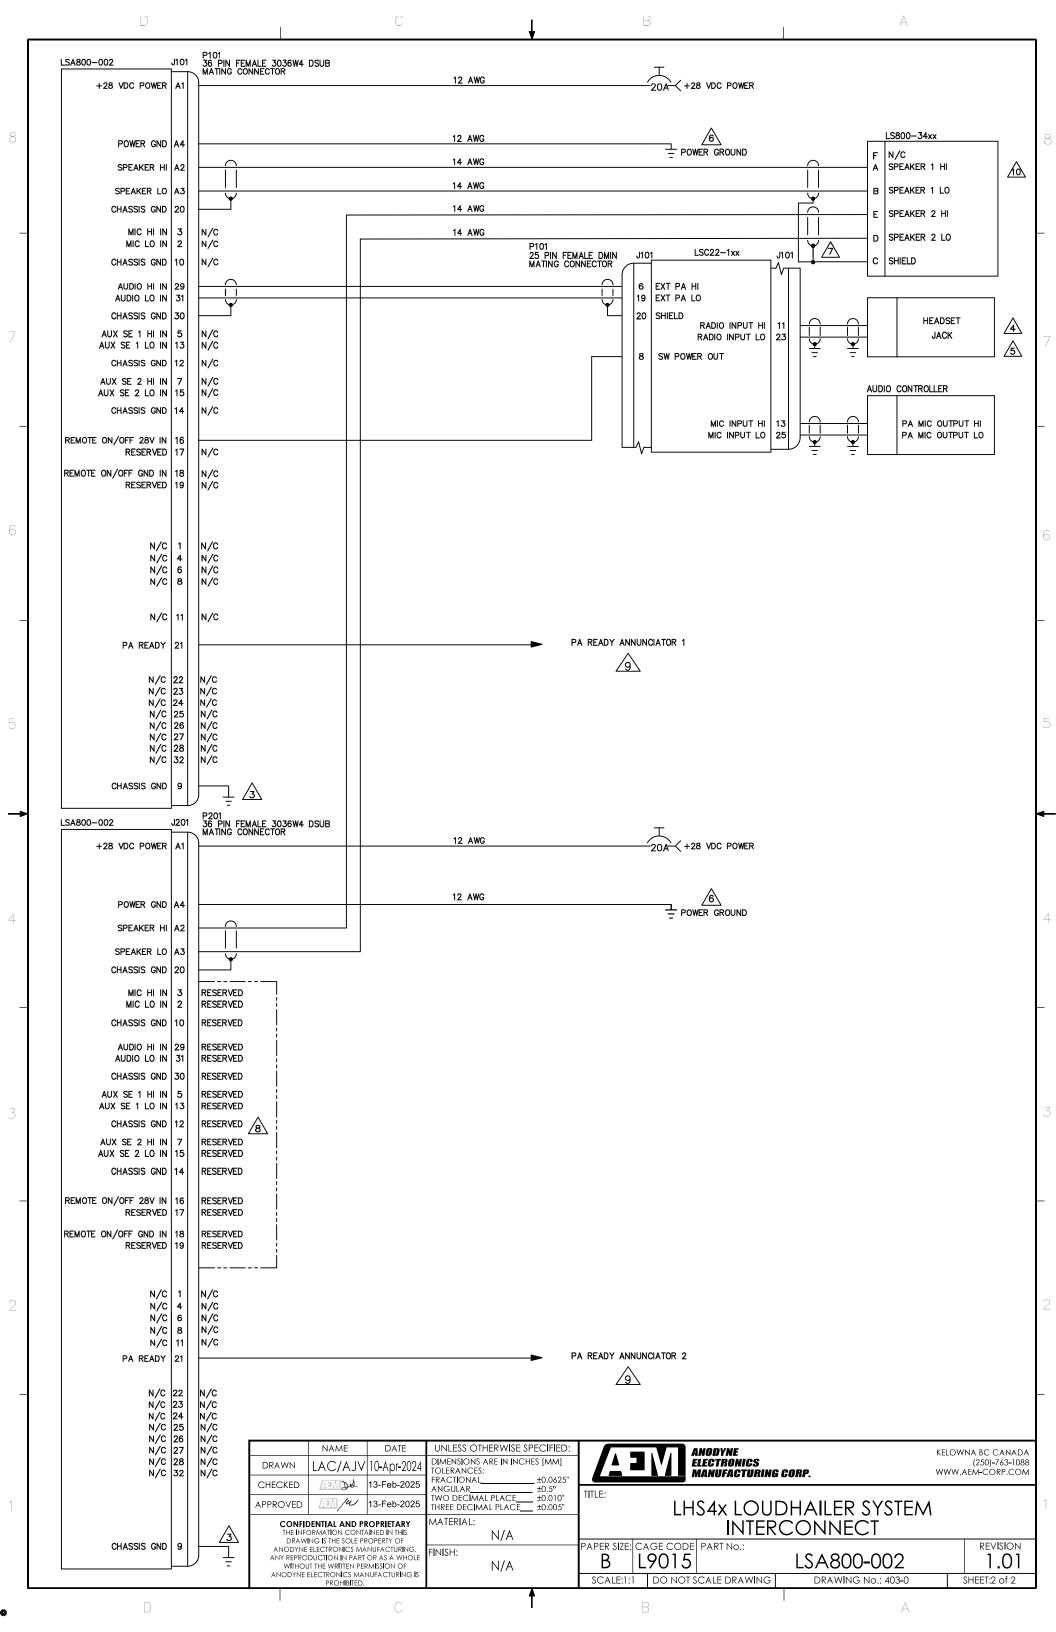

M C M C N/C N/C N/C PO⊗ER SPEAKER A U X A U X SPEAKER V D C S E S E O G N D 1 2 POWER Н 1 2 O 0 9 10 3 **O** 6 **O** 7 **O** Α2 8 Α1 А3 Α4 (**O**/ **, O**/ 0 10 13 12 15 0 0 O **O O** 16 **O** 18 **O** 20 **O** 21 23 26 **O O** 29 30 **O** 17 **O** 19 **O** 22 0 0 31 32 REMOTE ON/OFF 287 P A CHASSIS REMORE OZ/OFF アロの田内 フロフ CHASS-S CHASS-S AUX SE 2 AUD-0 L N P G N D

P101

36 PIN D-MIN SOCKET MATING CONNECTOR

VIEW IS FROM REAR OF AIRFRAME CONNECTOR.

	NAME	DATE	UNLESS OTHERWISE SPECIFIED:			<b>ANODYN</b>	E	KELOW	NA BC CANADA	
DRAWN	LAC	18-Jan-2024	TOLLIN II TOLO.			ELECTRO MANUFA	NICS CTURING CORP.	www.	(250)-763-1088 AEM-CORP.COM	
CHECKED	MDd.	19-Jan-2024	ANGULAK: MACH ± BEND ±	TITLE:						
APPROVED	13/1/8	09-Apr-2024	TWO PLACE DECIMAL ± 0.01 THREE PLACE DECIMAL ± 0.005	LOUD SPEAKER AMPLIFIER						
PROPRIETA	PROPRIETARY AND CONFIDENTIAL INTERPRET GEOMETRIC TOLERANCING PER:				CONNECTOR MAP					
	THE INFORMATION CONTAINED IN THIS MATER DRAWING IS THE SOLE PROPERTY OF		MATERIAL	SIZE CAGE CODE PART No.			REV			
ANODYNE ELECTRONICS MANUFACTURING. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF ANODYNE ELECTRONICS MANUFACTURING IS PROHIBITED.		FINISH —	Α	L90	)15 LSA800-002			1.00		
		DO NOT SCALE DRAWING	SCALE	SCALE: 1:1 DRAWING No		No.: 405-0	SHEET 1	of 2		

+ 2 8 N/C N/C N/C N/C POWER SPEAKER SPEAKER RESERVED RESERVED RESERVED RESERVED V D C G N D POWER Н 1 2 O O 3 **O** 6 7 **O** Α2 8 Α1 А3 Α4 (**O**/ (**O**) 0 13 10 12 15 O 0 0 **O** 29 23 **O** 16 **O** 18 **O** 20 **O** 21 26 **O** 31 **O** 17 **O** 19 **O** 22 **O** 30 0 32 ス〜の REWERNED REWERNED P A RESERVED RESERVED RESERVED REVERSED IN THE SECOND IN THE CHASS-S CHASS-S GND

P201

36 PIN D-MIN SOCKET MATING CONNECTOR

VIEW IS FROM REAR OF AIRFRAME CONNECTOR.

DRAWN	NAME LAC	18-Jan-2024	UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES TOLERANCES:		EV	ANODYN ELECTRO MANUFA			NA BC CANADA (250)-763-1088 AEM-CORP.COM
CHECKED APPROVED	[]] Jd	19-Jan-2024	TWO PLACE DECIMAL ± 0.01	TITLE:			) SPEAKER AMPLIF	IFR	
APPROVED 09-Apr-2024 THREE PLACE DECIMAL ± 0.005  PROPRIETARY AND CONFIDENTIAL INTERPRET GEOMETRIC TOLERANCING PER:				CONNECTOR MAP					
DRAWING IS THE SOLE PROPERTY OF		MATERIAL —	SIZE CAGE CODE PART No.			REV			
WITHOUT THE WRITTEN PERMISSION OF		FINISH —	A L9015		15	LSA800-002		1.00	
ANODYNE ELECTRONICS MANUFACTURING IS PROHIBITED.		DO NOT SCALE DRAWING	SCALE	CALE: 1:1 DRAWING No.: 405-0		SHEET 2 of 2			

