



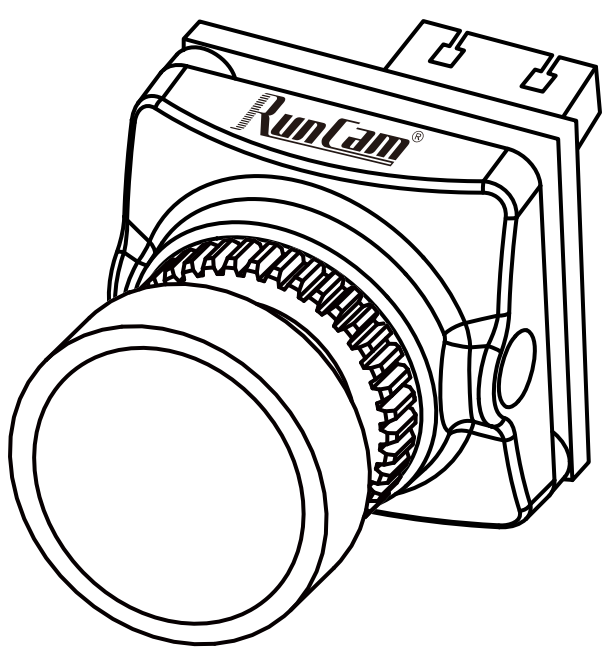


RunCam Eagle 3

USER MANUAL

Joystick Control

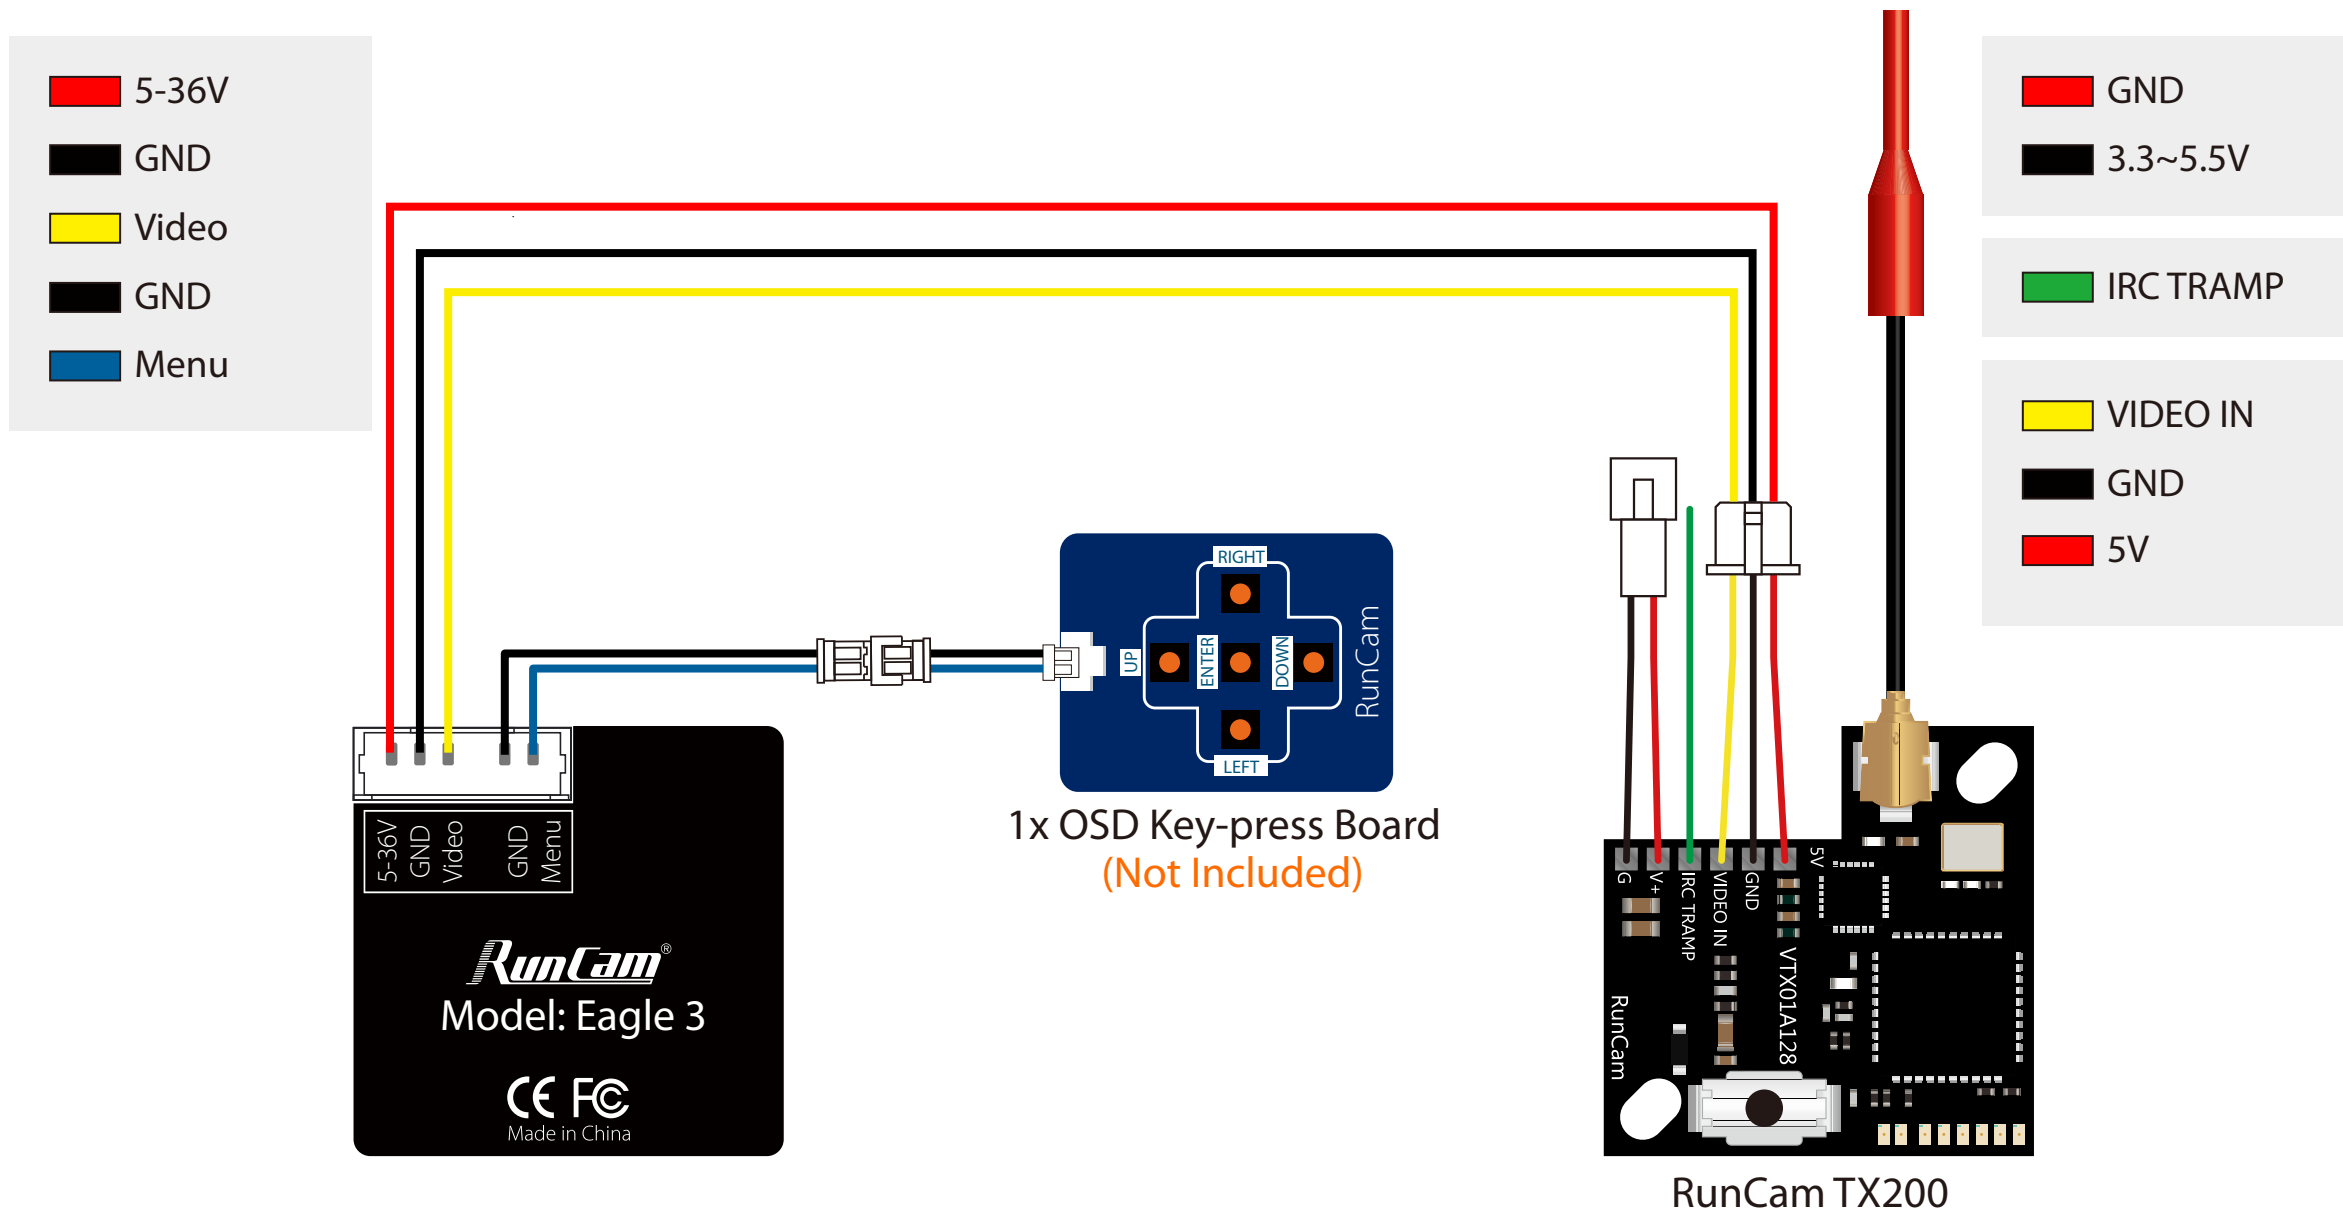

Dimensions & Installation

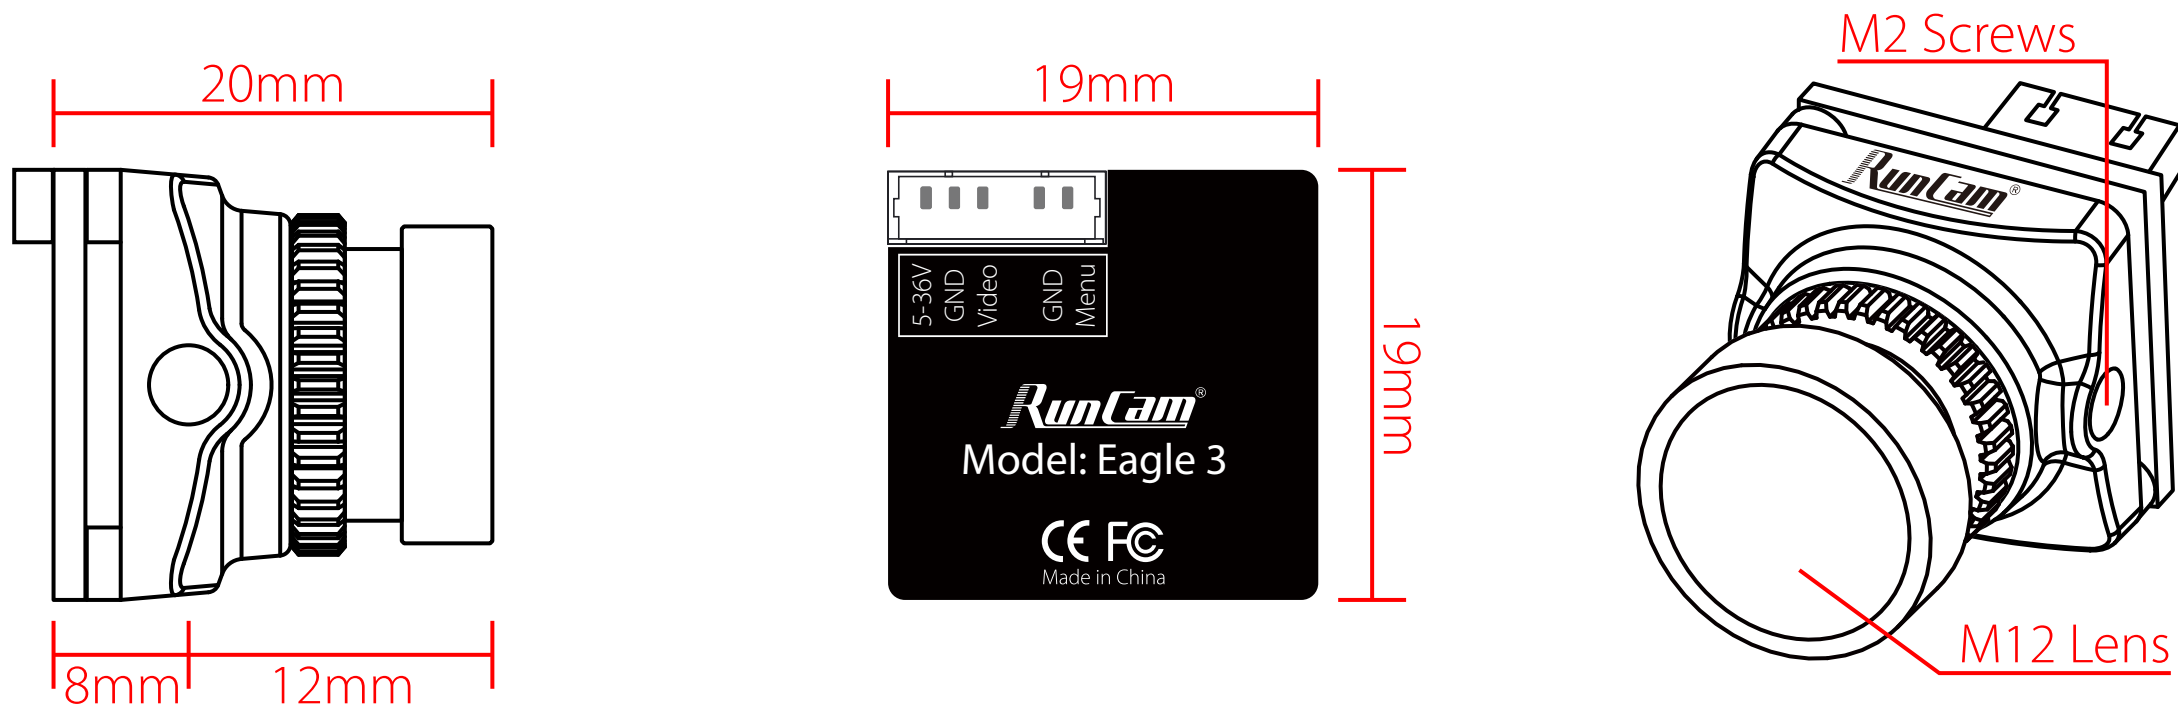

Camera Menu

MAIN MENU

AE

WB

DAY NIGHT

IMAGE ENHANCE

VIDEO SETTING

LANGUAGE

RESET

SAVE XEIT

EXIT

⏮

⏮

⏮

⏮

⏮

⏮ ENGLISH ⏭

EXPOSURE

BRIGHTNESS

EXPOSURE MODE

RETURN

⏮ 10 ⏭

⏮ GLOBE ⏭

- EXPOSURE MODE (GLOBE/BLC)

WB

MODE

RETURN

⏮ ATW ⏭

- MODE (ATW/MWB)

DAY NIGHT

MODE

RETURN

⏮ COLOR ⏭

- MODE (COLOR / BW / EXT / AUTO)

VIDEO SETTING

IMAGE RATIO

HORIZONTAL INVERTED

VERTICAL INVERTED

RETURN

⏮ 4:3 ⏭

⏮ OPEN ⏭

⏮ OPEN ⏭

- IMAGE RATIO (4:3 / 16:9)

IMAGE ENHANCE

CONTRAST

SHARPNESS

COLOR GAIN

3DNR

RETURN

⏮ AUTO ⏭

⏮ AUTO ⏭

⏮ AUTO ⏭

⏮ AUTO ⏭

- CONTRAST (AUTO/MANUAL)
- SHARPNESS (AUTO/MANUAL)
- COLOR GAIN (AUTO/MANUAL)

Parameters

Model	RunCam Eagle 3	
Image Sensor	1/2.8" Starlight CMOS Sensor	
Horizontal Resolution	1000TVL	
Lens	2.1mm (M12) FOV155° (4:3)	
Screen Format	4:3 / 16:9 switchable	
Mirror/Flip	Available	
Signal System	NTSC only	
S/N Ratio	>50dB (AGC OFF)	
Electronic Shutter Speed	Auto	
Auto Gain Control (AGC)	Auto	
Min. Illumination	0.001Lux@1.2F	
WDR	Global WDR	
Day/Night	Color/BW	
Menu Control	Cable Control	
Power	DC 5-36V	
Current	220mA@5V	120mA@12V
Housing Material	ABS	
Net Weight	9g	
Dimensions	19mm*19mm*20mm	