





HAYLOU GT1 2022

True Wireless Earbuds


User Manual

Overview

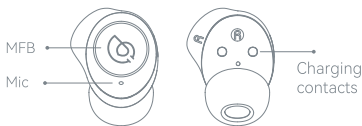

Type-C charging port

How to Wear



Gently insert the earbud into the ear canal, adjust the earbud to the most comfortable wearing state.




When calling, adjust Mic towards mouth to gain better talking experience.

How to Charge

For first time use, please remove the isolation film on the charging contacts of both earbuds. Then fully charge the charging case and earbuds.



Plug in the charging cable to charge the earbuds and the charging case at the same time. The charging indicator light will be solid red when the charging case is not fully charged. The indicator light goes out after fully charged.



Power-on

- Take out to auto power on when the earbuds are in case.
- If earbuds are out of case and in power-off state, keep touching the MFB button for about 1.5s to power on.



Power-off

- The earbuds will auto power off when put in the charging case.
- Keep touching the MFB button for 4.5s to power off.



How to Pair

Take two earbuds out from the charging case simultaneously, then open device Bluetooth and search for "Haylou GT1 2022", finally click it to complete the connection. Put the earbuds back to the charging case and repeat the above operation if the connection fails. After the first connection, the earbuds can be automatically connected to the last paired device (Bluetooth needs to be turned on).



Manual connection: when earbuds are turned off, manually turn on both of them. Wait 2-3 seconds for them to turn on and connect to each other. Turn on device Bluetooth to connect when light on single earbud flashes white slowly.

Switch between mono and stereo mode: It is stereo mode after two earbuds are successfully connected. Put one back into the case to power off, the other will enter mono mode. Or pick it up again to resume stereo mode.

Functions



- Short touch MFB button**
Play/pause music
- Double touch left MFB button**
Skip track backward
- Double touch right MFB button**
Skip track forward
- Double touch MFB button**
Answer/hang up
- Triple touch left MFB button**
Activate voice assistant
- Triple touch right MFB button**
Turn on/off low latency mode

When there is a new incoming call during a call:

- Hold the previous call, then answer the second call: double touch
- Hold the previous call, then reject the second call: Keep touching for about 1.5s
- Switch two calls: double touch

Factory Setting

- Put both earbuds into the charging case and ensure the case has sufficient power.
- Clear phone pairing record, then turn off, and complete the connection again.

Common abnormalities:

- One of the earbuds is mute:
Try to put the mute earbud into the charging case and then take it out;
If the problem is still not solved after the above operation, try the reset steps;
- The earbud cannot be charged:
Check whether the charging case has sufficient power;
Wipe the charging contacts with a dry cloth or cotton swab;
- The earbud cannot automatically disconnect from the mobile phone;
Check whether the charging case has sufficient power. The earbud will not power off if the case is out of power and will not disconnect from the mobile phone.

Package List

Earbuds, charging case, charging cable, user manual.

Basic Parameters(earbuds)

Operation range: 10m (open space with no obstacle)
Battery capacity: 35mAh(single earbud)
Charging time: approx. 1.5hr
Talk time: approx. 3.5hr
Standby time: approx. 60hr
Input parameter: 5V = 50mA
Battery type: li-ion
Bluetooth version: V5.2

Basic Parameters(charging case)

Input parameter: 5V = 500mA
Output parameter: 5V = 100mA
Charging time: approx. 2hr
Battery capacity: 310mAh
Battery type: li-ion



FCC ID: 2AMQ6-GT9

Caveats

Warning

- Do not disassemble, repair or modify the product for any reason, as this may cause fire or even completely destroy the product.
- Do not expose the product to environments where the temperature is too low or too high (below 0°C or above 45°C).
- Keep the indicators away from the eyes of children and animals while using the earphones.
- Do not use this product during thunderstorms. Thunderstorms may cause the product to malfunction and increase the risk of electric shocks.
- Do not wipe and clean the earphones or their case with alcohol or other volatile liquids.
- Avoid any contact with liquids.

Note

- Please read this user manual carefully before using the product and please properly store it.
- When using for the first time, please fully charge this product.
- Please charge the product, in case it has not been used over two weeks.

- Please use certificated charger.
- Do not wear earphones for a long term to protect your hearing.
- Do not wear earphones in any situations with potential risks as wearing them may reduce your perception to the outside world.

FCC Requirement

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.
This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- This device may not cause harmful interference;
- This device must accept any interference received, including interference that may cause undesired operation.

Daily maintenance

Please do not shower with earbuds. Do not wear them in rainy day. Do not leave them in washing machine or other extreme situations. Clean them with dry cloth.

Warranty Card

Warranty Period
12 months after you purchase this item.
(or you may inquire your local shopper for more details.)
Free Service
Supposing any defects caused by quality issues occur within the warranty period, please take this warranty card and purchase receipts to your distributor for free exchange service.

Model Number	
Date of Purchasing	
User' s Name	
User' s Phone	
User' s Address	
Shop' s Name	
Shop' s Address	
Comments	

Free exchange service will not be accessed under following circumstances:
1. Damages caused by unauthorized disassembly.

- Defects or physical damages caused by leaking or dropping off.
- Damages by act of God.
Supposing your item is within any damages or defects except the above circumstances, please return to us or your distributor for free repairing.

Manufacturer: Dongguan Liesheng Electronic Co., Ltd.
Address: Room 401-410, Building 1, No. 86 Hongtu Road, Nancheng District, Dongguan City, Guangdong, China