




背页



正页



扉页

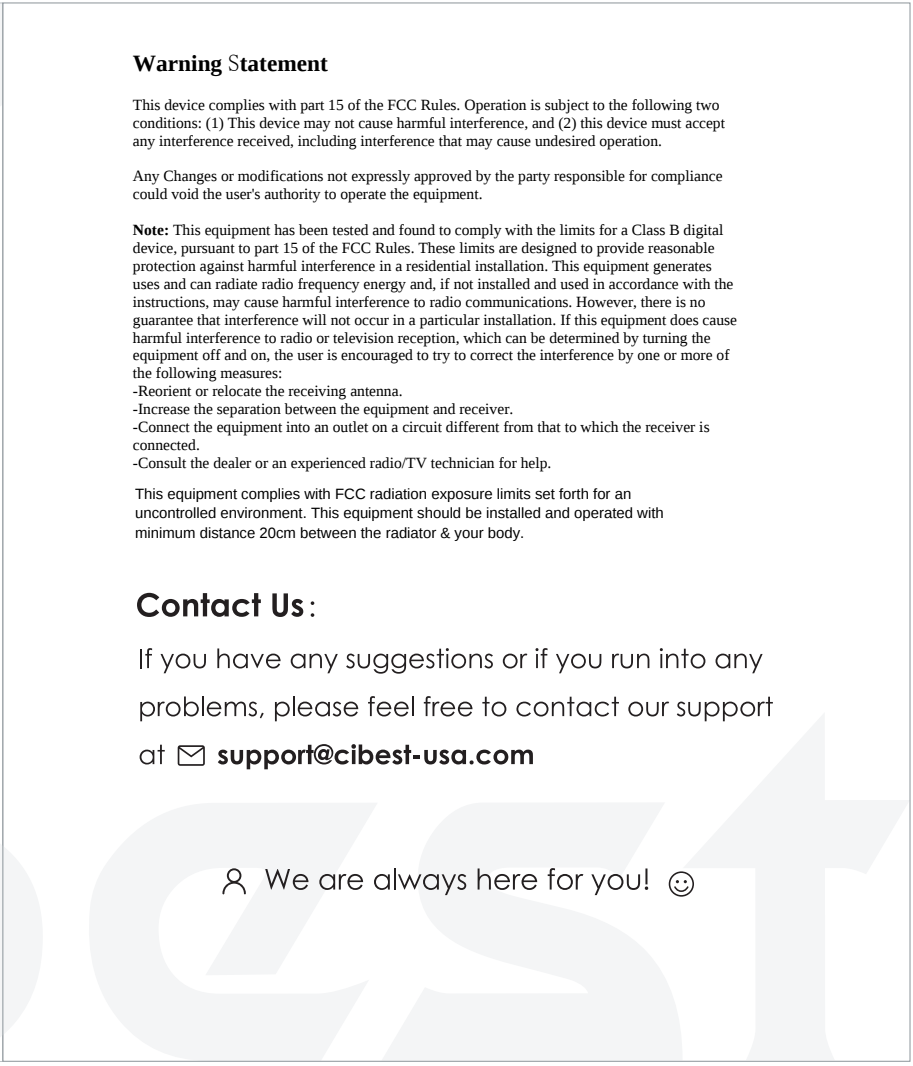

**Package Include**

**FAQ:**  
**1.Blurry Image**  
① First, correct the keystone to a rectangle.  
② Second, rotate the focus button to gain the best clarity.  
\*Effective Projection Distance: 3.6-19.7 FT  
**2.Mounting Hole**  
Adopting a single mounting hole dual-use design , projector is compatible with the standard camera tripod and 1/4 inch screw projector tripod stand. Meanwhile, you can rotate up and down the screw to meet different height needs.

EN01

**Product Function Structure Diagram**

02/EN

**Screen Mirroring Through Wireless Connection**

**Important:** Before screen mirroring, please press the on the projector/ on the remote to enter the interface of Input Source and Select Screen Mirroring.  
**For IOS**  
**\*Only can streaming with your router's WIFI**  
①Turn on the projector and select Screen Mirroring as the input source.  
②Press OK to enter the wifi selection interface. Choose your router's WIFI and select a password by remote control.

EN03

**Screen Mirroring Through Wireless Connection**

③Active Screen Mirroring on your device and search for the projector, then select BL108-B051EB from the searching results to connect.  
  
④The live streaming content from your IOS device will be projected to the wall/screen through WIFI connection.  
**Note:**  
If you would like to connect to another router's WIFI, please repeat the procedures mentioned in the section of Streaming with your router's WIFI.

04/EN

**Screen Mirroring Through Wireless Connection**

**For Android**  
**\* WIFI and cellular data both can connect with your Android phone**  
To active this function, your device must support Multi-Screen/Wireless display. Names may differ from different devices.  
  
① Turn on the projector and select Screen Mirroring as the input source.  
② Active Multi-Screen function on your device and search for the projector.  
③ Select **BL108-B051EB** from the searching results to connect.

EN05

**Screen Mirroring Through Wireless Connection**

④ Your device display will be projected to the wall/screen after a successful connection.  
**Important:**  
① The fluency of screen mirroring with wireless connection will be affected by the network environment. A bandwidth of 100Mbit or more is recommended when using screen mirroring.  
② Make sure your device is close to the projector when using wireless connection. A distance within 3.3 ft is recommended.  
③ Some mobile devices may not support screen mirroring due to the compatibility.  
④ If the projector image freezes when you switch the screen mirroring interfaces, please long press ok button for 5 seconds on the projector/ remote to do a reset, and the reset process will complete in 2 minutes, please wait patiently.

06/EN

**Screen Mirroring with the Original USB Cable**

**For IOS**  
① Turn on the projector and select Screen Mirroring as the input source  
② Connect your IOS device to the **USB1** port of the projector with the **original** lighting cable.  
③ Select Trust in the pop-us window of **Trust This Computer**.  
  
**For Android**  
**\*Some app voice will play by your android phone and image play by the projector. So we are not recommended Android devices connect via cable.**

EN07

**Screen Mirroring with the Original USB Cable**

**App Installation and Download Guide**  
**Step 1.** Turn on the projector and press the "S" key to select Screen Mirroring as the input source.  
**Step 2.** Connect your Android mobile device to the USB-T port of the projector using the original charging cable. A window will pop up automatically and prompts you to download the App. Please select "VIEW" to finish the download and installation.  
**Step 3.** Unplug the original cable and reconnect the device. A window will pop up to start the App. Please select "START NOW".  
**Step 4.** After starting the App, select "OK" in the pop-up windows of "RKCast". Your device's screen should be projected to the wall/screen in a few seconds.  
  
**USB Cast?**  
No installed apps work with this USB accessory! Learn more about this accessory at <http://update.rkcast.com/app/usb/USBCast.apk>  
**RKCast** will start capturing everything that's displayed on your screen.  
☐ Don't show again  
☒ Usb by default for this USB accessory  
**Please note:**  
a. The charging cable must be the original cable or a compatible cable, or the screen mirroring may be unsuccessful.  
b. Some mobile devices may not support screen mirroring.

08/EN

**Screen Mirroring with the Original USB Cable**

**Connect through device configuration if you choose not to use the App**  
**Step 1.** Turn on the projector and press the "S" key to select Screen Mirroring as the input source.  
**Step 2.** Go to the "Settings" on your device, find "Developer Options" and turn on the "USB Debugging."  
**Note:** The steps to turn on "Developer Options" may vary among Android devices. Please contact our customer service if you have questions about this step.  
**Example: Samsung Galaxy S8+**  
Go to the "Settings" and follow About Phone—Software Information—Build Number. Tap "Build Number" for several times until it shows "Developer mode had been turned on". Go back to the "Settings" and it should show "Developer Options" now.  
**Step 3.** Connect your Android mobile device to the USB-T port of the projector with the original charging cable.  
**Step 4.** Select "OK" in the pop-up windows of "Allow USB debugging?". Your device's screen should be projected to the wall/screen in a few seconds.  
  
**Allow USB debugging?**  
USB debugging is intended for development purposes only. It can be used to copy data between your computer and your device, install applications, and log data.  
   
**Allow USB debugging?**  
This computer's RSA key fingerprint is 50:8F:CE:2E:80:D7:12:89:2A:6E:1D:30:76:6E:3A:7B.  
☐ Always allow from this computer  
☒ Always allow from this computer  
   
**Please note:**  
a. The charging cable must be the original cable or a compatible cable, or the screen mirroring may be unsuccessful.  
b. Some mobile devices may not support screen mirroring.

EN09

**Projection Distance & Size**

**Multimedia Support Play Format**

| File         | Format  | Suffix          | Decoding       |
|--------------|---------|-----------------|----------------|
| Audio play   | Mp3     | mp3             |                |
|              | M4A     | mp4             |                |
| Picture play | JPEG    | .jpg            |                |
|              | BMP     | .bmp            |                |
| Video play   | MPEG1   | .DAT/.MPG/.MPEG |                |
|              | MPEG2   | .MPG            |                |
|              | MPEG4   | .AVI/.MP4       | DivX.XVID      |
|              | RM/RMVB | .RM/.RMVB       | RV8.RV9.RV10   |
|              | H264    | .MKV/.MOV       | H.264          |
|              | MJPEG   | .AVI            |                |
|              | DivX    | .DIVX/.AVI      | MPEG.DIVX.H264 |
|              | FLV     | .FLV            | H.264          |

10/EN

**Parameters**

|                 |                                 |                     |                    |
|-----------------|---------------------------------|---------------------|--------------------|
| Product Model   | BL108                           | Color               | 16777K             |
| Image System    | LCD                             | Light Source        | LED                |
| Mounting Screw  | 1/4"                            | Aspect Ratio        | 16:9/4:3           |
| Image Size      | 30"-200"                        | Projection distance | 3.6- 19.7 Ft       |
| Projection Mode | Front / Rear / Ceiling          | Keystone            | ±15° Correction    |
| Speaker         | 40.3W                           | Power               | AC100-240V         |
| Weight          | 1.02 KG                         | Size                | 8.27 x 7 x 3.14 IN |
| Input           | AV x 1 USB x 2 HDMI x 1 VGA x 1 | Output              | Audio x 1          |

EN11

**Important safety considerations**

The following safety instructions ensure the long service life of the projector to avoid fire or electric shock. Make sure to carefully read them and pay attention to all the following warnings.

12/EN