




# Anycubic Kobra S1

## User Manual

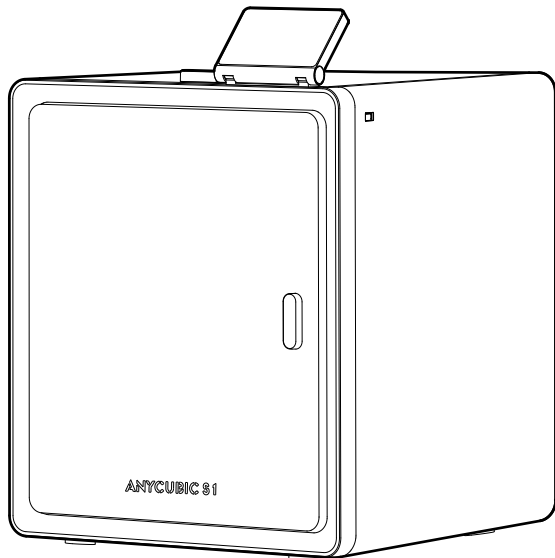

Installation Video

The product picture is for reference only. Please refer to the actual product.

Dear Customer,

Thank you for choosing **ANYCUBIC** products.

Maybe you are familiar with 3D printing technology or have purchased **ANYCUBIC** printers before, but we still highly recommend that you read this manual carefully. The installation techniques and precautions in this manual can help you avoid any unnecessary damage or frustration.

Please visit <https://support.anycubic.com/> to contact us if you have any question. You can also gain more information such as software, videos, models from the website.



**ANYCUBIC** APP



**ANYCUBIC** Wiki



**ANYCUBIC** Support Center



Multi-country User Manual

Team **ANYCUBIC**


Copyrighted by "Shenzhen Anycubic Technology Co., Ltd ", all rights reserved.

# Content

---

<b>1</b>	<b>Product Overview</b>	1
<b>2</b>	<b>Machine Installation</b>	3
	Unlock Printhead	3
	Unlock Hot Bed	3
	Install Spool Holder	4
	Install Activated Carbon	5
<b>3</b>	<b>Power-on Guide</b>	6
<b>4</b>	<b>Print Model</b>	8
<b>5</b>	<b>Printer Binding</b>	9
	APP	9
	Anycubic Slicer	10
<b>6</b>	<b>Other Function Descriptions</b>	13
<b>7</b>	<b>Attention</b>	15

# Product Overview

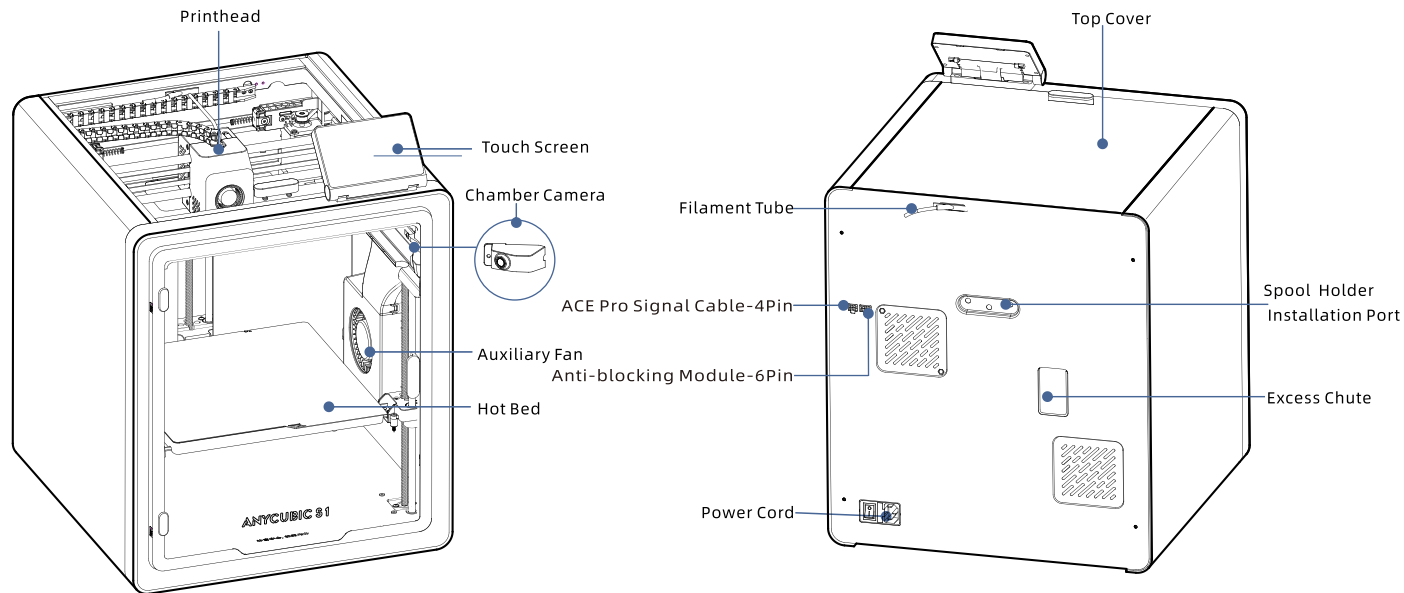

# Packing List

The following pictures are for reference only. Please refer to the actual object.



Kobra S1 Printer



Spool Holder



Screws  
M3\*6 (2pcs)



U-Disk  
(1Pcs)



Power Cord  
(1pcs)



2.5/2.0/1.5



Filament Sample



Activated Carbon  
(1Pcs)



Nozzle Cleaning  
Module(1Pcs)



Nozzle Silicone  
Part (1Pcs)



Nozzle Cleaner



Grease

## Technical Specification

### Printing

Technology: FDM (Fused Deposition Modeling)

Build Size: 250 mm (L) × 250 mm (W) × 250mm (H)

Layer Thickness: 0.08 ~ 0.28mm

Positioning Accuracy: X / Y / Z 0.0125 / 0.0125 / 0.0008 mm

Extruder Quantity: Single

Nozzle Diameter: 0.4 mm

Supported Materials: PLA/TPU/PETG/ABS/ASA

### Software

Slicing Software: Anycubic Slicer Next/Orca Slicer

Software Input Formats: .STL/.OBJ/.3mf

Software Output Formats: GCode

Connectivity: U-DISK, AC Cloud, Anycubic Slicer Next

### Electrical

Power Input: 100-120V~ /200-240V~

Rated Power: 500W/1500W

### WIFI

Frequency Band: 2.4G (2.400-2.4835GHz)

Working Mode: STA

### Physical Dimensions

Printer Dimensions: 400mm (L) × 410mm (W) × 490 mm (H)

Net Weight: ~18kg

ACE Pro Dimensions: 365.9mm (L) × 282.8mm (W) × 234.5 mm (H)

ACE Pro Net Weight: ~4.6kg