



Quick Start Guide



NovoStage

What is NovoStage ?

NovoStage is Windows™ based wireless collaboration software. No hardware setup needed, no cables required – total freedom. Share content from up to four devices simultaneously and start working together in the easiest way.



Key Features:

- Windows-based and enables to show multiple devices on the main display
- Maximum industry standard of security AES-256 bit encryption
- Supported 4K resolution
- Higher sound quality with Advanced Audio Coding
- Easily upgrade any Windows-based display into a wireless collaboration platform
- Allows you to share ideas by using existing VC applications from your device
- Compatible with USB LancherPlus

Getting Started

Hardware Requirement

NovoStage can be installed on a laptop or a display with Windows OPS.

Case 1: System requirements for PC

Operating System	Windows™ 10 Professional	
PC	Processor	Intel Core i5
	RAM	8GB
	SSD	128GB

Case 2: System requirements for Display / OPS

Operating System	Windows™ 10 Professional	
OPS	Processor	Intel Core i7
	RAM	8GB
	SSD	256GB

How to Download

Step1 Go to www.novoconnect.eu

Step2 Go to **Products > Wireless Collaboration > NovoStage > Download**

Step3 On your PC, open **File Explorer > Download > NovoStage_Setup_....exe >**

Allows changes

Step4 Follow the instructions on your screen to successfully install NovoStage.

Enjoy the free trial for 30 days!

Home Screen



① Ethernet IP Address

② Wi-Fi IP Address

③ Pin Code

④ Meeting ID

⑤ QR Code

⑥ Help Menu

⑦ Settings

Method to connect with LauncherPlus

Step1 Plug LauncherPlus into guest device

Step2 Browse the LauncherPlus USB storage > double click **Launch Novo.exe** (only for the first time set up)

Step3 Click the options menu (☰) and select Configure LauncherPlus


Step4 Select Edit in the LauncherPlus settings menu

Step5 A list of Wi-Fi connections will appear. Select the SSID of the access point which your NovoStage is connected from the list. A prompt will appear asking for the Wi-Fi password. Enter the Wi-Fi password.


Step6 Enter the IP address corresponding to NovoStage and press apply

How to register your license key

Step 1 Click **Activate my License**

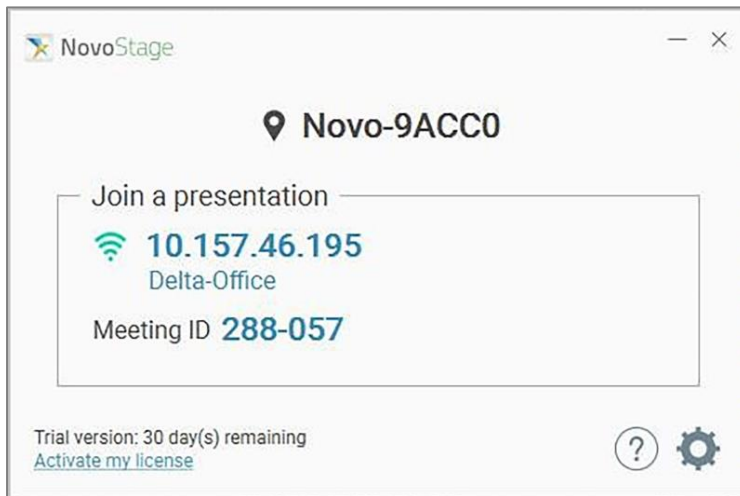

Step2 Enter License key

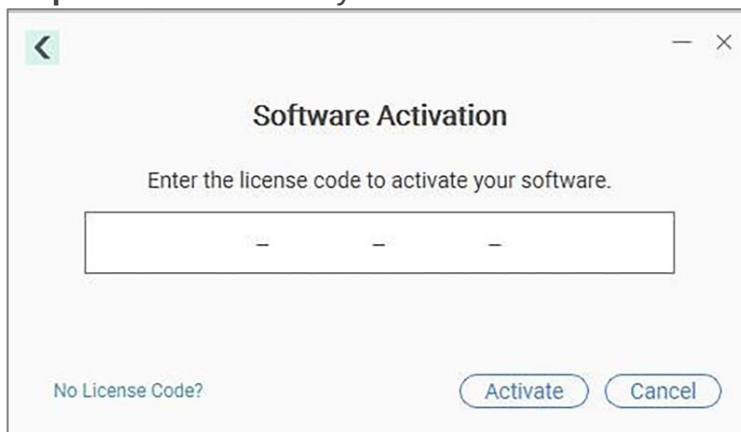

How to connect you devices to NovoStage

Scenario 1: With NovoConnect App/ Software

Users can download the NovoConnect app to connect to NovoStage and use advanced features like file sharing.

Step1 Download and install NovoConnect software for your devices

(Refer to NovoConnect Software Installation)
or download NovoConnect App from Play Store/ App store

Step2 Connect to the same Wi-Fi network as NovoStage

Step3 Launch NovoConnect and enter Meeting ID, IP address
Room Name



Enter Meeting ID, IP Address, or Room Name



Step4 Enter Pin (only if pin lock is enabled)

Scenario 2: Connect with AirPlay

Apple users can use native mirroring and connect to NovoStage via Airplay.



Step1 Connect your Apple device to the same Wi-Fi network as NovoStage

Step2 Go to **Control Center** > select **Screen Mirroring**

Step3 Select the Room Name of NovoStage

📍 NovoStage

Step4 Enter Pin code (only if AirPlay code is enabled)

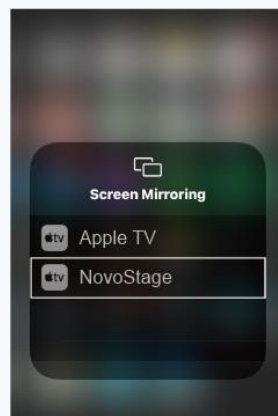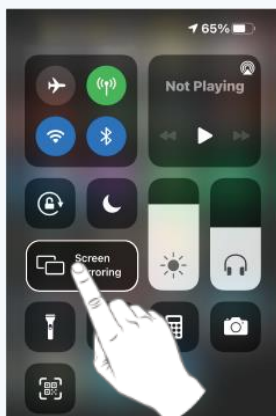

Scenario 3: Connect with LauncherPlus

The LauncherPlus is suited for guests who want to join a meeting on NovoStage. More information about the LaunchPlus can be found [here](#).

Step1 Plug LauncherPlus into guest laptop (Windows OS/ macOS)

Step2 Guest laptop needs to be connected to the guest Wi-Fi network

Step3 Browse the LauncherPlus USB storage > double click **Launch Novo.exe** (only for first time set up)

Step4 Press the center button to connect to NovoStage



Scenario 4: With Web portal

Step1 Go to www.launchnovo.com

Step2 Select your device OS and download the portal version

Step3 On NovoConnect software enter the Meeting ID, Room Name or IP Address to connect





Vivitek EMEA
Zandsteen 15, 2132 MZ Hoofddorp
The Netherlands
T: +31-20-800-3960
F: +31-20-655-0999
www.vivitekc corp.com

Vivitek Asia
7F, No. 186, Ruey Kuang Road, Neihu, Taipei 11491, Taiwan R.O.C.
T: +886-2-8797-2088
F: +886-2-6600-2358

Vivitek America
46101 Fremont Blvd, Fremont, CA 94538
U.S.A.
T: +1-510-668-5100
F: +1-510-668-0680



Visit www.vivitekc corp.com for more product info
Copyright (c) 2021 Delta Electronics, Inc. All Rights Reserved

A brand of  **DELTA**