
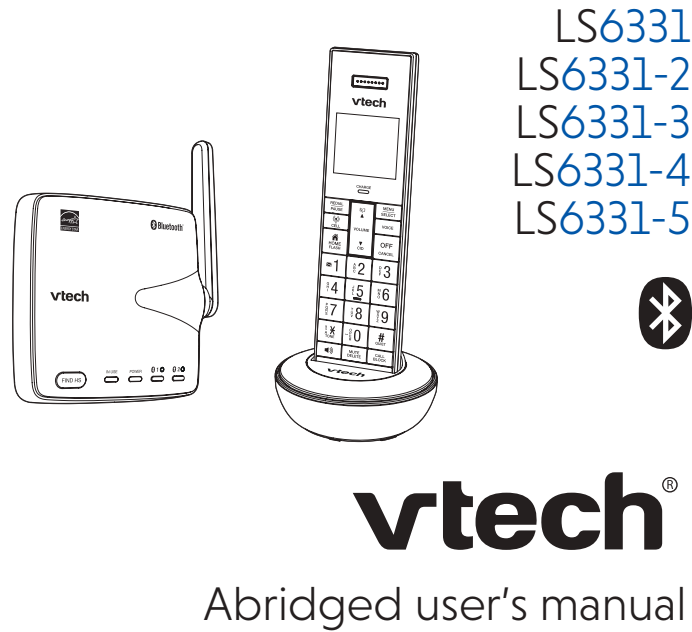


Go to www.vtechphones.com (US) to register your product for enhanced warranty support and latest Vtech product news.

Go to phones.vtechcanada.com (CA) for latest Vtech product news.



vtech
Abridged user's manual

IMPORTANT SAFETY INSTRUCTIONS


- When using your telephone equipment, basic safety precautions should always be followed to reduce the risk of fire, electric shock and injury, including the following:
 - Read and understand all instructions.
 - Follow all warnings and instructions marked on the product.
 - Use only with UL listed Bluetooth devices.
 - Unplug this product from the wall outlet before cleaning. Do not use liquid or aerosol cleaners. Use a damp cloth for cleaning.
 - CAUTION:** Do not install the telephone base at a height above 2 meters.
 - Do not use this product near water such as near a bath tub, wash bowl, kitchen sink, laundry tub or a swimming pool, or in a wet basement or shower.
 - Do not place this product on an unstable table, shelf, stand or other unstable surfaces.
 - Avoid placing the telephone system in places with extreme temperature, direct sunlight, or other electrical devices. Protect your phone from moisture, dust, corrosive liquids and fumes.
 - Slots and openings in the back or bottom of the telephone base and handset are provided for ventilation. To protect them from overheating, these openings must not be blocked by placing the product on a soft surface such as a bed, sofa or rug. This product should never be placed near or over a radiator or heat register. This product should not be placed in any area where proper ventilation is not provided.
 - This product should be operated only from the type of power source indicated on the marking label. If you are not sure of the type of power supply in your home or office, consult your dealer or local power company.
 - Do not allow anything to rest on the power cord. Do not install this product where the cord may be walked on.
 - Never push objects of any kind into this product through the slots in the telephone base or handset because they may touch dangerous voltage points or create a short circuit. Never spill liquid of any kind on this product.
 - To reduce the risk of electric shock, do not disassemble this product, but take it to an authorized service facility. Opening or removing parts of the telephone base or handset other than specified access doors may expose you to dangerous voltages or other risks. Incorrect reassembling can cause electric shock when the product is subsequently used.
 - Do not overload wall outlets and extension cords.
 - Unplug this product from the wall outlet and refer servicing to an authorized service facility under the following conditions:
 - When the power supply cord or plug is damaged or frayed.
 - If liquid has been spilled onto the product.
 - If the product has been exposed to rain or water.
 - If the product does not operate normally by following the operating instructions. Adjust only those controls that are covered by the operation instructions. Improper adjustment of other controls may result in damage and often requires extensive work by an authorized technician to restore the product to normal operation.
 - If the product has been dropped and the telephone base and/or handset has been damaged.

- If the product exhibits a distinct change in performance.
- Avoid using a telephone (other than cordless) during an electrical storm. There is a remote risk of electric shock from lightning.
- Do not use the telephone to report a gas leak in the vicinity of the leak. Under certain circumstances, a spark may be created when the adapter is plugged into the power outlet, or when the handset is replaced in its cradle. This is a common event associated with the closing of any electrical circuit. The user should not plug the phone into a power outlet, and should not put a charged handset into the cradle, if the phone is located in an environment containing concentrations of flammable or flame-supporting gases, unless there is adequate ventilation. A spark in such an environment could create a fire or explosion. Such environments might include: medical use of oxygen without adequate ventilation; industrial gases (cleaning solvents; gasoline vapors; etc.); a leak of natural gas; etc.
- Only put the handset of your telephone next to your ear when it is in normal talk mode.
- The power adapter is intended to be correctly oriented in a vertical or floor mount position. The prongs are not designed to hold the plug in place if it is plugged into a ceiling, under-the-table or cabinet outlet.
- For pluggable equipment, the socket-outlet shall be installed near the equipment and shall be easily accessible.
- CAUTION:** Use only the batteries indicated in this manual. There may be a risk of explosion if a wrong type of battery is used for the handset. Use only the supplied rechargeable batteries or replacement batteries (BT162342/BT262342) for the handset. Do not dispose of batteries in a fire. They may explode. Disposed of used batteries according to the instruction.
 - Do not use the battery in following conditions:
 - High or low extreme temperature during use, storage or transportation.
 - Replacement of a battery with an incorrect type that can defeat a safeguard.
 - Disposal of a battery into fire or a hot oven, or mechanically crushing or cutting of a battery, that can result in an explosion.
 - Leaving a battery in an extremely high temperature surrounding environment that can result in an explosion or the leakage of flammable liquid or gas.
 - A battery subjected to extremely low air pressure that can result in an explosion or the leakage of flammable liquid or gas.
- Use only the adapter included with this product. Incorrect adapter polarity or voltage can seriously damage the product.
- The applied nameplate is located at the bottom or rear of the product.

SAVE THESE INSTRUCTIONS


- Battery**
- Use only the battery provided or equivalent. To order a replacement, visit our website at www.vtechphones.com or call 1 (800) 595-9511. In Canada, go to phones.vtechcanada.com or call 1 (800) 267-7377.
 - Do not dispose of the battery in a fire. Check with local waste management codes for special disposal instructions.

WHAT'S IN THE BOX

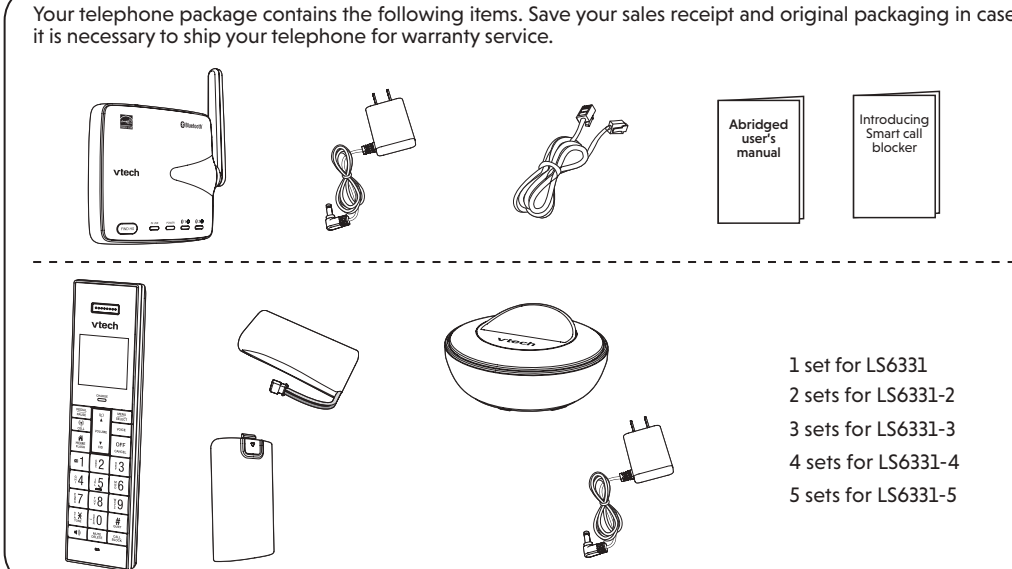

OVERVIEW


Handset

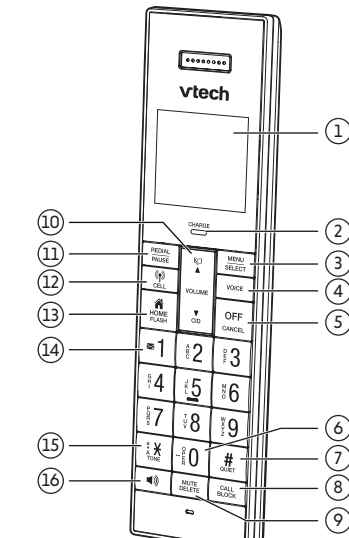

- LCD display
- CHARGE light
- MENU/SELECT
 - Display the menu.
 - Select an item or save an entry or setting while in the menu.
- VOICE
 - Activate the voice-controlled application of one of the connected devices when the system is in idle. If there is no paired device, then the handset will prompt **Pair cell first** to remind you for remote voice control activation.
- OFF/CANCEL
 - Hang up a call.
 - Return to the previous menu or idle mode without making changes.
 - Delete digits while predialing.
 - Silence the handset ringer temporarily while the phone is ringing.
- OPER 0
 - Enter space character during text editing.
- QUIET #
 - Press and hold to set and turn on the QUIET mode, or turn it off.
 - When reviewing a caller ID log entry, press repeatedly to view other dialing options.


INSTALL AND CONNECT

Install the battery

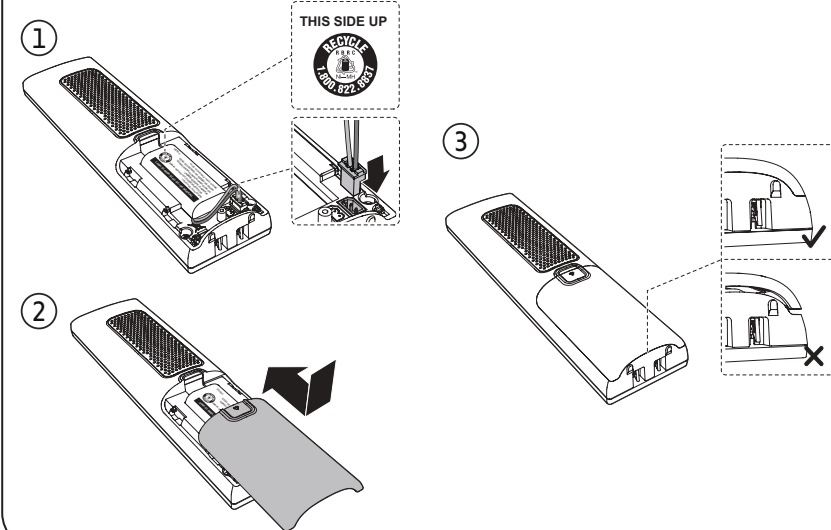


Connect and charge


Connect the telephone base
If you subscribe to digital subscriber line (DSL) high-speed Internet service through your telephone line, make sure you connect a DSL filter (not included) to the telephone wall jack.

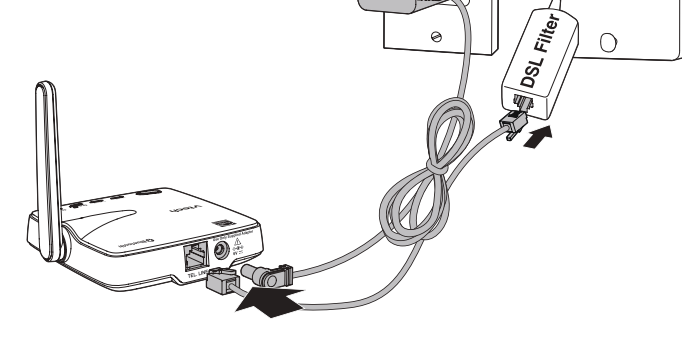

Connect the charger and charge the battery

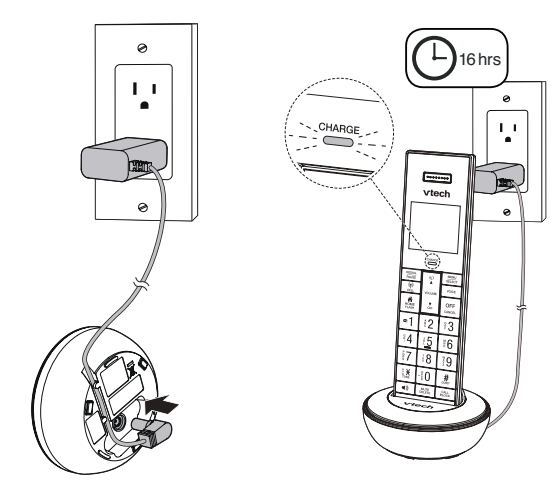

MOUNT (OPTIONAL)

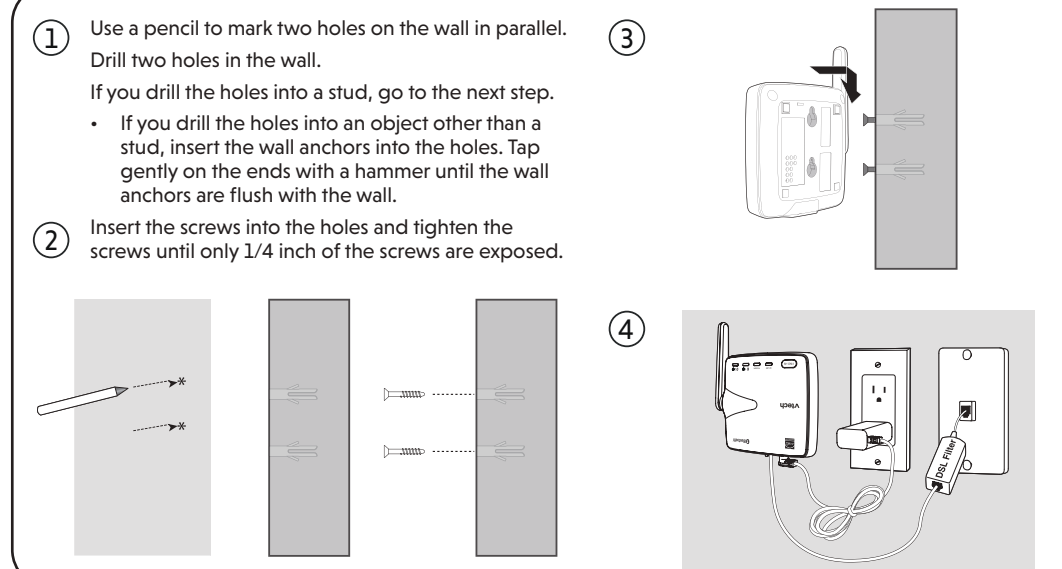


SETUP

After you install your telephone or power returns following a power outage and battery depletion, the handset will prompt you to set the date and time, and to configure the Smart call blocker through voice guide.

Date and time

Follow the steps below to set the date and time. For example, if the date is 25 April, 2024, and the time is 12:05 PM.

When the handset prompts you to set the date and time:

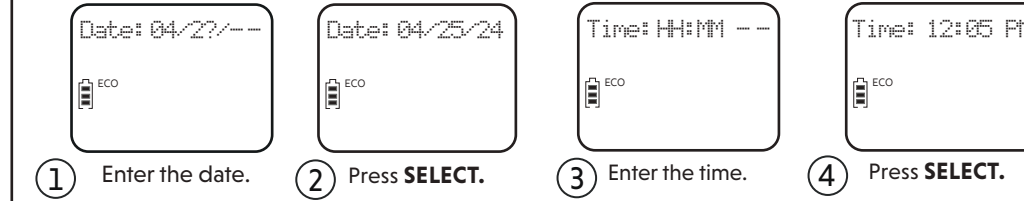

NOTES:
To skip the date and time setting, press **OFF/CANCEL**.

If you have skipped the prompt, you can set up again by pressing **MENU**. Scroll to select **Set date/time**, and then press **SELECT**. Then, follow the steps above.

Voice guide for Smart call blocker

After you have set or skipped setting the date and time, the handset will prompt if you want to set Smart call blocker. For more details, see **Use voice guide to set Smart call blocker** in the Complete user's manual.

When the handset prompts you to set up the Smart call blocker via voice guide:

- Press **MENU** on the handset to start voice guide setup.
- The handset prompts, "*Hello! This voice guide will assist you with the basic setup of Smart call blocker*".
- Input the designated option numbers as instructed in the voice guide.
 - To skip the voice guide, press **OFF/CANCEL**.

Change LCD language setting

You can select English, French, or Spanish to be used in all screen displays:

- Press **MENU** when the handset is not in use.
- Press **▼** or **▲** to scroll to **Settings** and then press **SELECT**.

BLUETOOTH®

NOTES:
Your **LS6331/LS6331-2/LS6331-3/LS6331-4/LS6331-5** is compatible with Bluetooth version 2.0 or above devices.

You can pair and connect up to two Bluetooth cell phones.

Before you begin, make sure that you have cellular coverage and your Bluetooth enabled cell phone is not connected to any other Bluetooth device.

Make sure you turn on the Bluetooth feature of your cell phone. Refer to your cell phone user's manual to learn how.

To use a Bluetooth enabled cell phone with your telephone system, you must first pair and connect your Bluetooth cell phone with the telephone base.

Bluetooth wireless technology operates within a short range (a maximum of approximately 15 feet). When you pair a Bluetooth cell phone to the telephone base, place your Bluetooth cell phone closer to the telephone base to maintain sufficient signal strength.


If you have trouble pairing your Bluetooth cell phone to the telephone base, try turning off the Bluetooth feature of the nearby devices that your cell phone has previously paired.

For more details about the Bluetooth feature, read the online Complete user's manual.

Pair and connect your Bluetooth enabled cell phone

- Choose a slot to pair the cell phone. Press and hold **1** or **2** on the telephone base for about 4 seconds until the **1** or **2** light flashes.
 - If there is already a cell phone paired to the slot, the existing cell phone will be erased from the cell devices list.
- Turn on the Bluetooth feature of your cell phone and search for or add new devices. Once your cell phone finds your Vtech phone (**Vtech DECT 6.0**), press the appropriate key on your cell phone to continue the pairing process.
 - All cell phones that are connected to the telephone base are disconnected temporarily until the pairing process is complete.

When a device is successfully paired and connected, the corresponding status icon (**1** or **2**) displays on the handset. The corresponding device light on the telephone base (**1** or **2**) turns on.

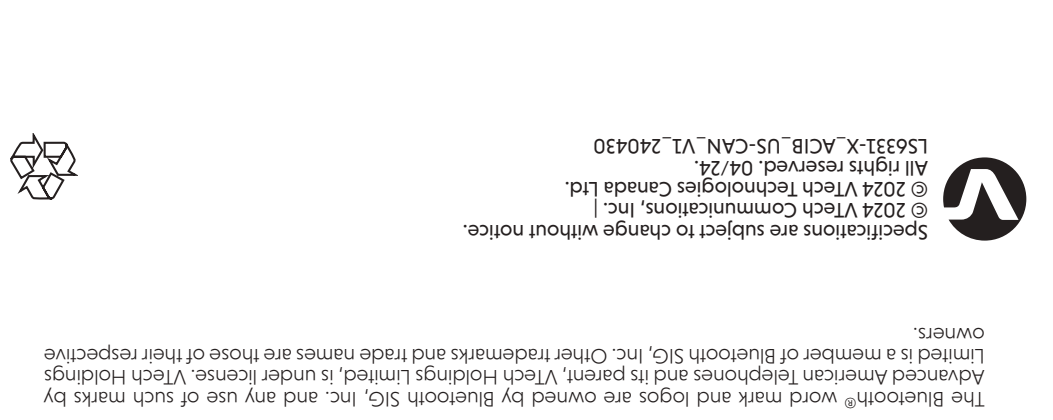

VTech Connect to Cell™ application

This application helps you integrate your Android phones with your **LS6331**.

For more information and application download, scan the QR code on the right, or go to www.vtechphones.com/app-connect-to-cell.



Download contacts from your Bluetooth cell phone

- Press **MENU** when the handset is not in use.
- Press **▼** or **▲** to scroll to **Bluetooth**, then press **SELECT**.
- Press **▼** or **▲** to scroll to **Download PB**, then press **SELECT**.
- Scroll to select the desired cell phone, and then press **SELECT**.

NOTES:

For certain cell phones, you may need to press a key on your cell phone to confirm the phonebook download.

Certain cell phones do not support SIM card download. If this is the case, transfer the contacts from your SIM card to your cell phone memory first. Then download from your cell phone memory. For more information on how to transfer contacts from your SIM card to your cell phone memory, see the user's manual of your cell phone.

The telephone system will remove any duplicate entries, and any entries that contain unrecognizable symbols; therefore, the number of entries downloaded from your cell phone phonebook may be less than the number of entries stored in your cell phone.

Review the device list

Up to two devices can be paired to the telephone base. All paired devices are shown on the device list. To use a paired device, it must be connected and in an active slot (**1** or **2**) on the device list. Only one active device can be on a call at a time.

- Press **MENU** when the handset is not in use.
- Press **▼** or **▲** to scroll to **Bluetooth**, then press **SELECT**.
- Press **SELECT** again to choose **Device list**.

TIP:

When a device (**1** or **2**) is displayed on the handset screen, press **DELETE** will remove the device.

Auto connection

When an active device moves within Bluetooth range of the telephone base, or is turned on within range, the telephone base tries to connect to the device.

- A connected device could also be disconnected by:
- Turning off the Bluetooth device.
 - Turning off the Bluetooth feature of the device.
 - The Bluetooth device is not within range of the telephone base.

Connect a paired device

If you need to connect your paired cell phone to the telephone base manually:

- Press **1** or **2** on the telephone base when it is not in use, and its light flashes.
- When the cell phone is connected to the telephone base, the corresponding status icon (**1** or **2**) displays on the handset screen. The corresponding device light (**1** or **2**) turns on.

REMOTE VOICE CONTROL

If you have connected a cell phone to your **LS6331** telephone system, you can activate the voice-controlled application (voice app) of the cell phone, such as Siri®, Google Now™ or S Voice®, via your handset.

The remote voice control feature works with:

Voice-controlled application	Siri	Google Now	S Voice
Operation System (Versions supported)	iOS (8 or above)	Android (4 or above)	Android (4 or above)

Before using the remote voice control feature, make sure you checked the following:

- Your cell phone is paired and connected to your telephone system via Bluetooth.
- No Bluetooth applications are running in the background of your cell phone.
- Place your cell phone next to the telephone base.
- Do not lock your cell phone's screen or set passcode for activating the voice app.
- Make sure you have turned on or logged in to the applications on your cell phone that you will be sending your voice commands, such as GPS, email and social networking accounts.
- Your cell phone's data or Wi-Fi signal is in full

strength and your cell phone can connect to the Internet.

- Try to activate the voice app on your cell phone to ensure it is in place.

To activate remote voice control on handset:

- Press **VOICE** on the handset.
 - If you have connected one cell phone to the telephone, the handset shows the device name of the connected cell phone directly.
 - If you have connected two cell phones to the telephone, the handset shows **Select a device**, followed by the device name list of the connected cell phones. Scroll to choose the desired cell phone, and then press **SELECT**.
- The handset then shows the remote voice control icon (📞).
 - If the activation fails, the handset displays **Not available**. When the screen returns to idle, try Step 1 again.
- When the handset plays the confirmation tone as forwarded by the cell phone's voice app, start speaking toward the handset, and then wait for feedback. Make reply to the voice app's feedback, if necessary.
 - You can press **📞** on the handset to turn off passcode for activating the voice app.
 - Make sure you have turned on or logged in to the applications on your cell phone that you will be sending your voice commands, such as GPS, email and social networking accounts.
- To end the current remote voice control session, press **OFF/CANCEL** on the handset. You can restart by following Steps 1-3 mentioned above.

NOTES:

Once you have activated the remote voice control feature, you are using your cell phone's voice app to operate your cell phone.

Please check the cell phone user's manual and the voice app's help topics to find out what commands you can use and any limitations of the voice app.

Some cell phone manufacturers or network carriers may customize the phone's operating system and implement their own voice app. If you want to use Google Now, you need to manually set it as your default voice app. For detailed instructions, refer to your cell phone user's manual, or contact your cell phone's manufacturer or network carrier. You may also go to "Google Product Forums" on the Internet and check the corresponding help topics.

Due to the settings of certain cell phones and voice apps, your cell phone may not support the remote voice control feature. Contact your cell phone's manufacturer or network carrier, or check the voice app's help topics if you encounter any problems.

During the remote voice control activation, if your Android cell phone comes with both a dedicated voice app and Google Now, it may prompt you to select which voice app to use, and whether use it for just once or always. Select the desired options. If you do not respond to your cell phone's prompt in time, the handset screen will return to idle, and the 📞 icon will disappear. You can restart by following Steps 1-3 mentioned above.

If you receive a landline or cell line incoming call when you have activated remote voice control on a connected cell phone, the remote voice control operation will be ended.

The feature may be ended automatically by your cell phone. For example, a cell call has been established via the remote voice control feature and the call has just ended.

If you need to press dialing keys (**0-9**, ***, #**) during a cell call, please make the call using the cell lines of your telephone system instead of using the voice app via the remote voice control feature.

Siri® is a registered trademark of Apple Inc.
Google Now™ is a trademark of Google Inc.
S Voice® is a registered mark of Samsung Electronics Co., Ltd.
iOS is a trademark or registered trademark of Cisco in the U.S. and other countries and is used under license.

