



CRYSTORAMA

LIGHTING THE WAY FOR SIXTY YEARS



Crystorama.com

ASSEMBLY INSTRUCTION MODEL #JAY-A5009-BS

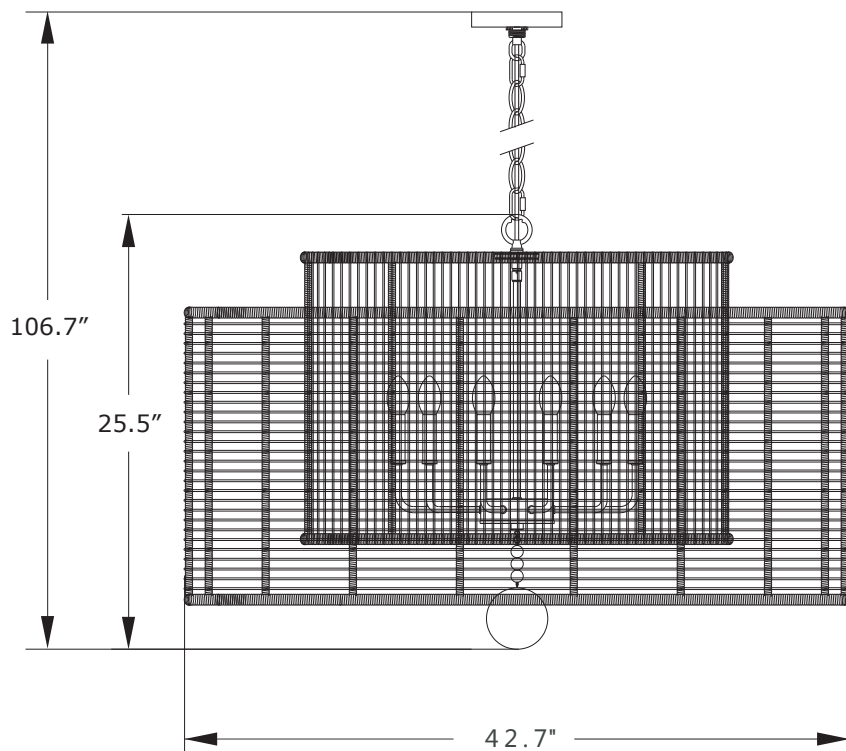

All electrical components must be installed by a licensed electrician in accordance with the National Electric Code and the appropriate local electrical codes.



You will need 12-Candelabra Base Bulb
40 Watts Recommended 60 Watts Max.
USE LED BULBS FOR EXTENDED USE
THE FIXTURE IS DAMP RATED

How to Install

1. Place the candle sleeve on the socket, and insert recommended bulb (no included).
2. Hang the wood ball "A" onto the ball bottom of the fixture.

Crystal Sets

- A. 1 Set.
(3) 20mm + 100mm Bottom ball

WARNING: This product can expose you to Lead, which is known to the State of California to cause cancer and/or birth defects or reproductive harm. For more information go to www.P65Warnings.ca.gov.


CRYSTORAMA

LIGHTING THE WAY FOR SIXTY YEARS



Crystorama.com

PART NUMBER MODEL #JAY-A5009-BS

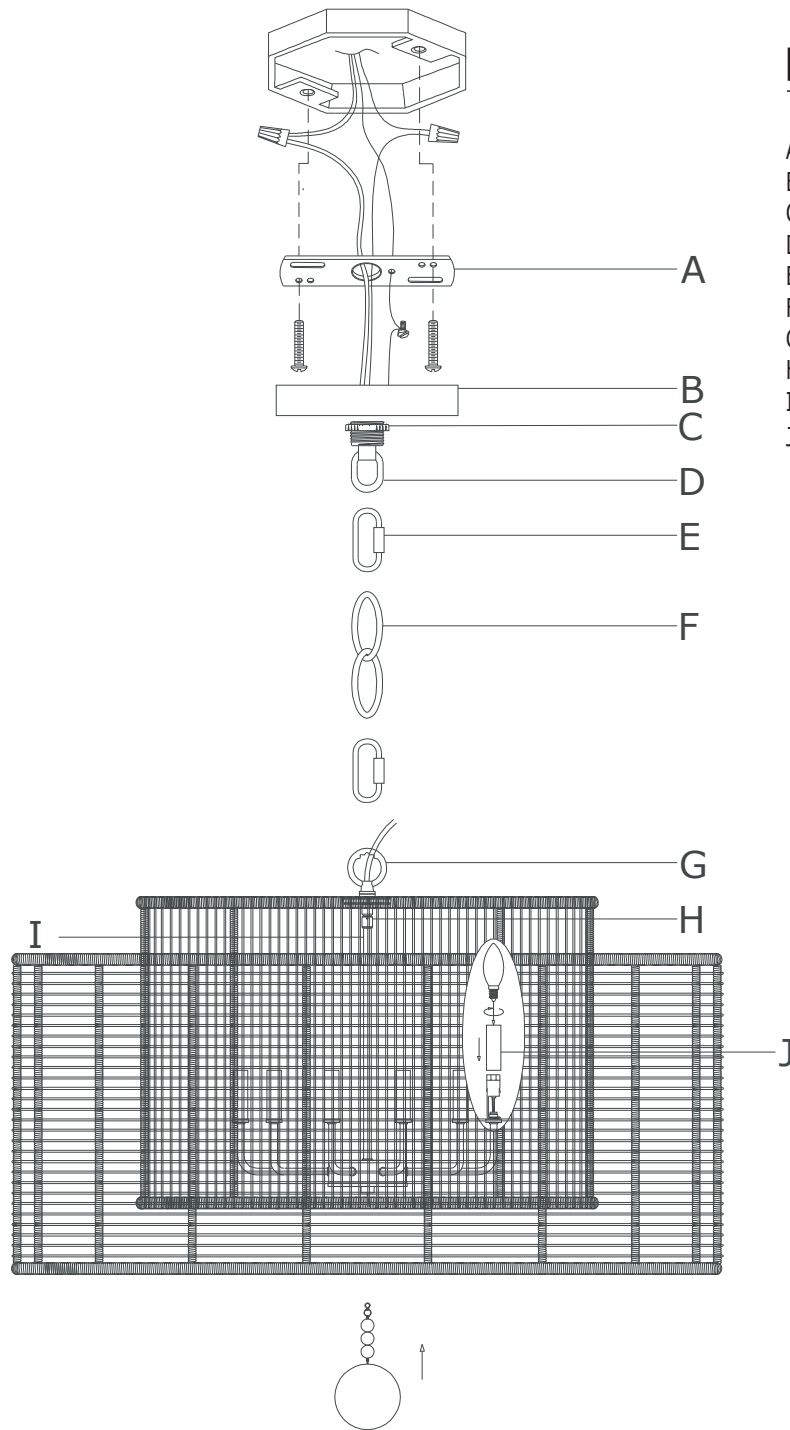

Part Number

- A. (1) - Mounting Hardware
- B. (1) - Canopy(W5.9",H0.98") #XRE5009BSCAN5.9IN
- C. (1) - Collar Ring
- D. (1) - Collar Loop #XRE5009BSLOOP1
- E. (2) - Quick Link
- F. (1) - Hanging Chain(72", 4.0mm) #XRE5004BSCHA4MM
- G. (1) - Fixture Loop #XRE5009BSLOOP2
- H. (1) - SWIVEL #XRE5009BSSWIVEL
- I. (1) - Center Stem(9.7MM,14.6") XRE5009BSSTEM14.6IN
- J. (12) -Candle Sleeve(W0.87",H3.35") #XRE5009BSCDL3.35IN