

Odmaster

Programming APP

USER'S MANUAL



Table of Contents

1. Supported Radio Models-----	1
2. Tips for Indicator Light -----	3
3. Odmaster APP Usage Guide-----	4
4. PC Programming Usage Guide-----	14
5. Repeater List Feature-----	22
6. PoC (Push-to-Talk over Cellular) Feature ---	23

Support models (Continually updated)

Baofeng

- UV-5R (For UV-5R, BF-F8+, UV-59, UV-10R)
- BF-F8
- UV-5RA
- UV-5RE
- UV-82
- F8TD
- 888S
- GT-3
- 888S-PLUS (Beta)
- 88A (Beta)
- 88ST (Beta)
- UV-5X
- UV-5XP (Beta)
- GT-5R (Beta)

TIDRADIO

- UV-5R
- UV-82
- UV-5R Pro
- F6
- F6GP
- T77S
- T77
- G6
- H6
- GM-5R

TID

- V2
- M8
- M8s
- T10

For RT

- RT5R(Beta)
- RT5(Beta)
- H-777
- RT22FR5
- RT22

For Tway

- UV-5R Pro
- UV-82 Pro(Beta)

For Rddtiy

- UV-5G
- GA-25
- GA-510
- UV-5R EX(Beta)
- GA-55(Beta)
- UV-5RX3(Beta)
- UV-82X3(Beta)

Others

- AR-5(Beta)
- KD-C1(Beta)
- PX-8885(Beta)
- LT-316(Beta)
- ZT-X6(Beta)
- A-5R(Beta)
- HH5R(Beta)
- TI-F8+(Beta)
- KT-980HP(Beta)

Tips for Indicator Light

Please fully charge the battery before using (about one hour),
a fully charged battery can standby for 1 day.



When the Bluetooth Programmer is **charging**, the indicator light is **red**.



When the Bluetooth programmer is **fully charged**, the indicator light is **green**.



When the Bluetooth Programmer is **working**, the indicator light is **blue**.



Charging Port



Power Button

Odmaster APP

— Step 1 —

Download Odmaster App

Google Play:



iOS App Store:



— Step 2 —

Register an account and log in

Tips : it is recommended to register by email
or log in directly by Facebook



PLEASE READ IT CAREFULLY!

This App has social features and programming features. The birthday and gender in your profile are used in the social features, if you don't want to disclose your information, you can select Custom while gender was asked.





About Location Permissions

According to the Android development guidelines, matching the Bluetooth programmer requires the location permission to be enabled.



— Step 3 —

Plug the programmer into the radio and make sure both are turned on.




Tips:

After the Bluetooth programmer is turned on, the indicator light is **blue**.



— Step 4 —

Connect bluetooth and radio in app

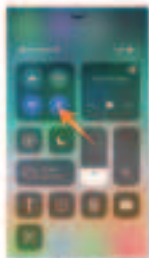

Turn on mobile phone
Bluetooth



Select Bluetooth in
App



Select device



When "ODMARIO BT" is
displayed, the connection
is successful.

Tips:

After the phone is turned on Bluetooth, do not paired the device with your phone in BT settings, just make sure that BT is enabled and then open the Odmaster App and pair with the programmer within the App.



— Step 5 —

Select model and read from radio



Please skip this page if you can read the radio successfully.

If you can't read from your radio, you have to make sure that the Bluetooth programmer is pressed in firmly as in some radios it is a little stiff causing the bad connection. It's better to hold it tightly when reading.

If it doesn't work after trying the above methods, please contact customer service for technical support, please tell us your phone model, app version, radio model, Odmaster account (for example: iPhone 13, 1.0.135, baofeng uv5r, 102365) and the detailed questions, it's better to send with the attached pictures or videos so that we can help you solve the problem faster.

— Step 6 —

Program data and write to radio



When the Bluetooth programmer is writing, the indicator light **flashes blue**.

— Step 7 —

Save the programming file to use next time.



PC Programming

Odmaster Web allows you to set parameters on the web page. After saving, it will be synchronized to the mobile phone and can be directly written to the radio. Compared with the mobile phone page, the web page is more comfortable, convenient and faster.



Step 1

Open the " Remote Program " button in the setting of the Odmaster APP

Step 2

Sign in your account on Odmaster Web
(<https://web.odmaster.net>)



Step 3

Select radio model, click " add " then program frequency and function



Step 4

Write channel information
and optional feature, finally name it and save






Step 5

Connect the Bluetooth programmer, select radio model, then read from your radio

Step 6

Click " RX/TX List ", select
the programming file you have saved

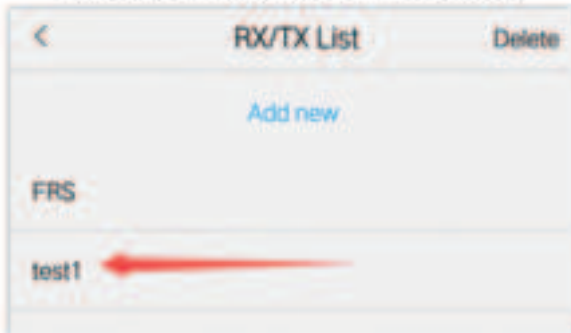



Step 7

Then write to your radio



Step 8

If you want to modify the parameter on App, you can change it, then click " Update "

Easy to find the local repeater and import it to your radio.

Repeater List Feature



Offline Programming Feature

Imports your preset programming data into radio, even when no network available



PoC Function

Push - to - Talk over Cellular

Step 1

Click



to



Add friends



Enter Channel



Create Channel

Step 2

Send messages and pictures to your friend or call your friend.



Step 3

Chat like the radio in the channel





Product question?
Ask customer service:

Customer Support

-  TIDRADIO
-  support@tidradio.com
-  Amazon order support channel



tidradio wireless programmer



Online manual :

Log in the Odmaster APP → Me →
Help & Support → Online manual.



Visit www.tidradio.com for more products