NVS-PA0032006PM

6 ZONE REMOTE PAGING MICROPHONE WITH VOLUME CONTROL

DESCRIPTION

The NVS-PA0032006PM is a premium remote paging station engineered for seamless operation with NVS six-zone amplifiers (NVS-PA0028006CP/NVS-PA0029006CP/NVS-PA0030006CP/NVS-PA0031006CP). It features a sleek, tempered glass panel with capacitive touch keys, anti-fingerprint coating, and high-gloss bevel finishing, combining aesthetic appeal with durability. Designed for intuitive control, it offers real-time LED zone indicators and one-touch access to all six paging zones. Built for high reliability and low failure rates, this device ensures stable performance in commercial and industrial PA systems.
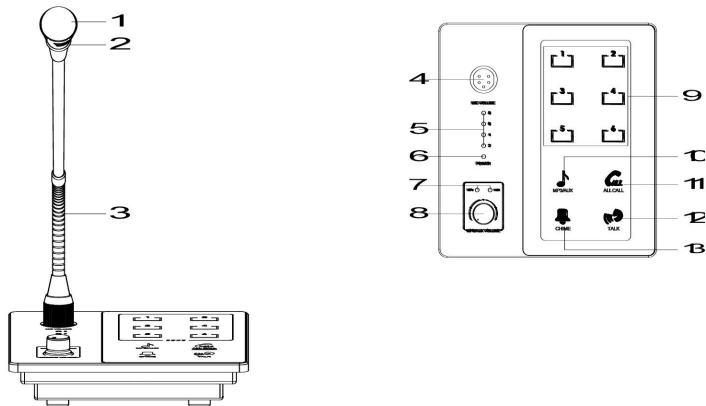
FEATURES

- Key-lock zone switches
- Signal level indicator; chime up/down
- Dual RJ45 with override; cascade 3 stations/channel
- Transmission up to 600m
- Hidden mic volume knob
- Anti-fingerprint touch panel
- One-touch all-zone paging with priority

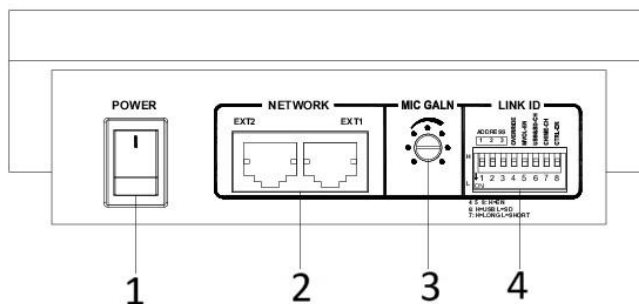| Specifications	
Model	**NVS-PA0032006PM**
Input Sensitivity	30±3mV
Frequency Response	200Hz-15KHz
Signal to Noise Ratio	≥70db
RJ45 Port	RS485 communication protocol
Input Power	Host power supply
Dimension	172×160×53mm
Weight	0.89Kg

Version 2.2

NORDEN®

6 ZONE REMOTE PAGING MICROPHONE WITH VOLUME CONTROL

FRONT PANEL

1. Microphone Head
2. Microphone Switch Indicator Ring
3. Microphone rod (The angle can be adjusted freely)
4. Five pin XLR
5. Four-segment level indicator
6. Power Supply Indicator
7. AUX/MP3 Indicator

8. AUX/MP3 Volume Knob
9. Six-zone touch buttons 1-6 (blue backlight marks selected)
10. Source toggles button
11. All-zone broadcast button
12. Voice broadcast button
13. Chime button

REAR PANEL

1. Power Switch
2. Dual RJ45 remote communication and audio transmission interface
3. Microphone gain knob
4. 8 DIP Switches

6 ZONE REMOTE PAGING MICROPHONE WITH VOLUME CONTROL

ORDERING INFORMATION

Part Number	Description	Standard Quantity
NVS-PA0032006PM	6 ZONE REMOTE PAGING MICROPHONE WITH VOLUME CONTROL	01

ACCESSORIES INFORMATION

Description	Standard Quantity
Microphone Cap	01
Microphone Rod(L=415mm)	01
User Manual	01