



Dual Thorn BT Game Controller


Product Manual(PG-9167)

Product application instruction:

- 1.This product support direct-play mode for Android/ iOS, especially designed for 《PUBG Mobile》、《Arena of Valor》、《Knives Out》ect., Plug & Play, other game app and activation are both non-necessary, makes the setting process easier (support Android 6.0 or above, iOS 11.0 or above);
- 2.This product is compatible with Android/ iOS smartphone/ tablet, smart TV which are enabled to play games after wireless connection.
- 3.The extendable size maximum to 135-250mm, able to hold 11 inch ipad pro;
- 4.The right joypad is detachable, and the left is non-detachable, it can be treated as a single hand gamepad (Support Hot Swap);
- 5.Accessories includes a wired audio converter module,makes wired audio connection possible;
- 6.This product support TURBO function,brings better game experience for the player.
- 7.Ergonomic design, comfortable feeling;



- ★ Due to mobile system issues, some mobile may not support this device(e.g..mobile under MTK platform do not support)
- ★ Android direct-play mode doesn't support for single joypad, please try the HID mode/ iOS.
- ★ Due to the official game platform software upgrades or source code changesand other not resist factors caused some of the game can not be played or connected with our Gamepad, iPega company has no responsibility. iPega reserve the right of final interpretation for this.

Button Illustration


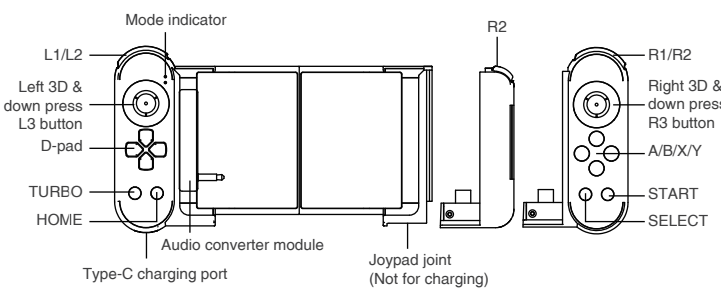


Installation and detachable method of right joypad

1.Press the right joypad as shown by the arrow in Figure 1 below, and push it upward until the joypad is stuck;




2.The installation is completed, as shown in Figure 2 below;




3. When the right joypad needs to be removed, press and hold the / button on the back of the product and pull down the right joypad at the same time to remove the right joypad;

How to charge the mobile phone while using the gamepad

1. Pass the charging cable through the right joypad first, then connect the mobile phone, and then align the gamepad in the gamepad slot,;




2. The installation is completed, as shown in Figure 2 below;



Electrical Parameters:


- 1.Working voltage: DC3.7V;
- 2.Working current: <15mA;
- 3.Static current: <15uA;
- 4.Play time: >15H;
- 5.Input voltage/current: DC5V/500mA;
- 6.Charging: around 2hrs;
- 7.BT 4.0, transmission distance: ≤8M;
- 8.Battery: 380mAh;
- 9.Standby time: 30 days after fully charged;

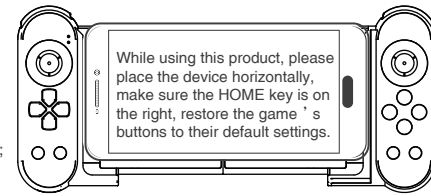

Usage instruction:


Android V3 direct-play mode: (This mode doesn't support to operate game under single-hand gamepad)

Press and hold down the D-pad button"RIGHT" + HOME button for around 2 seconds to enter V3 direct-play mode(Android), blue LED start flash quickly,search bluetooth name"PG-9167" on Android mobile/ tablet and connect it! After the connection is successful, the blue LED is always on! Once connected, you can press HOME button directly, blue LED slowly flash, and the blue LED is always on, means automatically reconnected!

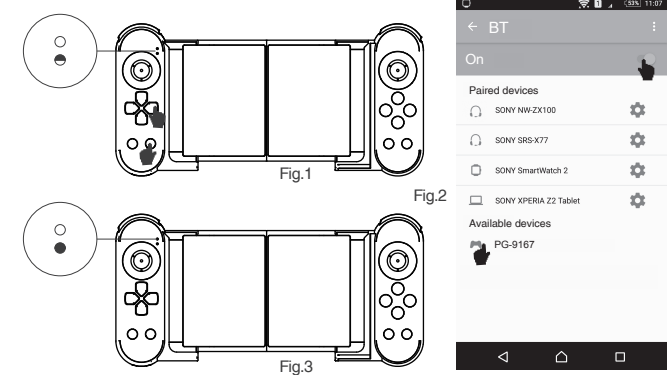

IOS V3 direct-play mode:

Press and hold down the D-PAD button"LEFT" + HOME button for around 2 seconds to enter V3 direct-play mode(iOS), blue LED start flash quickly,search bluetooth name"PG-9167" on Apple mobile /tablet and connect it! After the connection is successful, the blue LED is always on! Once connected, you can press HOME button directly, blue LED slowly flash, and then blue LED is always on, means automatically reconnected!

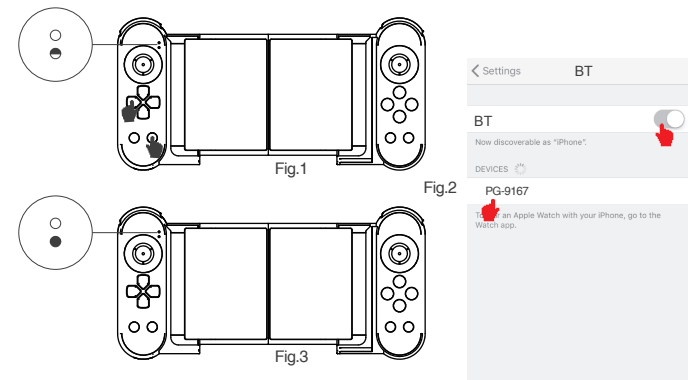

Android/iOS direct-play button mapping:

Search "www.ipega.hk" website, and select the default operation instructions. To set up the button mapping, please download and install " Shooting Plus V3 " APP; reset the buttons from the APP ! This product button is default as PUBGmobile!

Download APP:


Search "ShootingPlus" in the Apple App Store/Google Play Store, download and install the "ShootingPlus V3" app, "



ShootingPlus V3

Android standard game mode:

Press and hold down the D-pad button "UP" + HOME button for 2 seconds to enter the Android standard game pairing mode, the blue LED light flashes quickly, search name "PG-9167" on the Android mobile phone / Android Tablet / Android smart TV and connect it! After the connection is successful, the blue LED is always on! Once connected, you can directly press the HOME button, the blue LED light flashes slowly, automatically back!

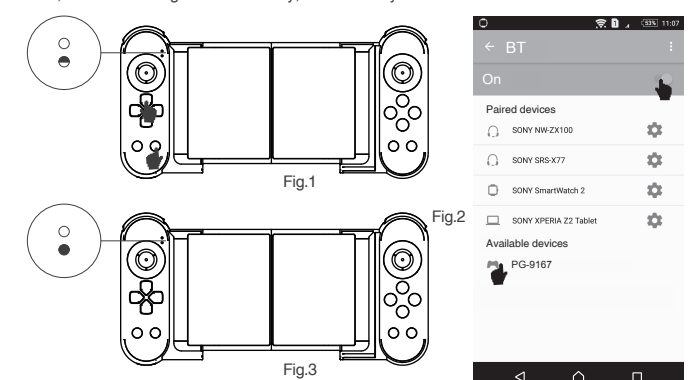

TURBO function

- a.Action buttons include(A/B/X/Y/L1/L2/R1/R2) eight buttons, all support to set up TURBO function by manual;
- b.Setting method: Hold down the action button, then press TURBO button to restart the function, repeat the operation to close down the function;
- c.After the product sleep, shut down and restart, the previous setting for turbo function is automatically cleared. If the turbo function is enabled, it must be reset!



Charging/Sleep/Wake-up/Shutdown

- ① Charging:
 - a. Low power, orange LED flashes;
 - b. Charging: orange LED is always on;
 - c. Fully charged: orange LED is off;
- ② Charging/Sleep/Wake-up/Shutdown
 - a. Gamepad will shutdown to enter sleep mode if don't have any operation in 10min;
 - b. Once connected, just press HOME button to wakeup and reconnect it to use;
 - c. Under turning on, hold down HOME button for 3 seconds, product shut down, all LED turn off;

Notes:

1. Please do not store this product in wet or high-temperature areas.
2. Don't knap, beat, drub, pierce, or try to decompose this product, to avoid unnecessary damageto the product.
3. The product has built-in batteries, and please don ' t discard them together with the garbages.
4. Don't charge the controller in a place near the fire or other heat source.
5. Non professional personnel should not disassemble the product, otherwise it will not be covered in the after-sales warranty service.

Product list:

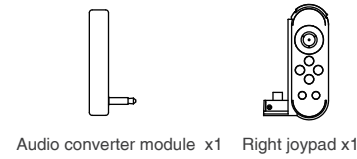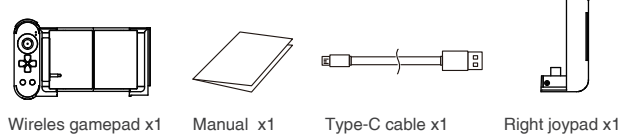

iPega trademarks belongs to IPEGA LIMITED.

Patent NO.: ZL201930338129.7



双刺游戏手柄

产品说明书(PG-9167)中文版

产品适用说明:


- 1.产品支持Android/iOS直玩模式，特别为《和平精英》、《王者荣耀》、《荒野行动》等手游设计，即连即玩，无需多余的游戏平台和复杂的设置与激活操作（支持安卓6.0以上， iOS11.0以上系统）；
- 2.产品适用于Android/iOS手机平板，智能电视系统上无线连接时,进行游戏操作时使用；
- 3.横向超宽伸缩（拉伸长度135-250mm），可夹持11寸新款ipad pro 平板使用；
- 4.右手柄可拆卸替换，左手柄可做单手柄使用（支持热拔插）；
- 5.配套有线音频转换模块，不影响使用有线音频外接；
- 6.产品支持TURBO连发功能，使玩家在游戏中得到更好的游戏体验；
- 7.结构符合人体工程学,手感舒适；

- ★ 因手机系统问题,个别手机可能不支持此设备(如:联发科平台的手机无法支持)
 - ★ 安卓直玩模式下不支持单边操作，请在安卓标准模式或iOS使用。
 - ★ 因官方游戏平台软件升级或源代码变更等不可抗力因素造成部分游戏无法与本产品连接操作，我公司不负任何责任。对此我公司保留最终解释权。
- 技术支持QQ群: 837350687
客服电话: 0755-2791 8998
在线时间: 周一至周五9:30-17:30





ipega官方微信公众号
(关注微信号 下载游戏大厅)

功能按键图示


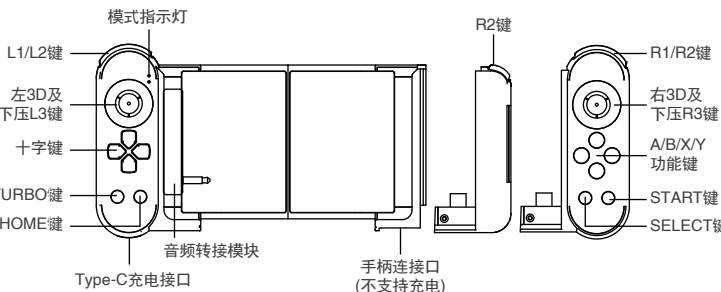


右手柄安装和拆卸方法

1.将右手柄按下图1箭头所示，往上推至卡住手柄即可；




2.安装完成，如下图2；




3.当需要拆卸右手柄时，按住产品背面的 / 按钮同时将右手柄向下拉，即可将右手柄拆卸；

使用产品时给手机充电操作方法

1.先将充电线穿过右手柄，然后连接手机，再将手柄装配在手柄卡槽内；




2.安装完成，如下图2；



产品特性参数:


- 1.工作电压: DC3.7V;
- 2.工作电流: <15mA;
- 3.静态电流: <15uA;
- 4.持续使用时间: >15H;
- 5.输入电压/电流: DC5V/500mA;
- 6.充电时间: 约2小时;
- 7.蓝牙4.0，传输距离: ≤8M;
- 8.电池容量: 380mAh;
- 9.待机时间: 满电放置30天;

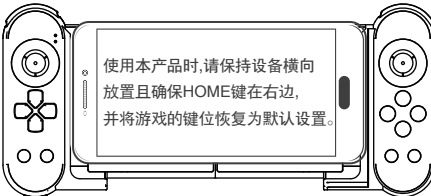

产品使用说明:


安卓V3 直玩模式(此模式不支持单手柄操作):

同时按十字键“右键”+HOME键2秒进入V3直玩配对模式(安卓)，手柄蓝色LED灯快闪，当安卓手机/平板搜索到“PG-9167”设备名时，选择连接！连接成功后，手柄蓝色LED灯常亮！已成功连接过，可以直接按HOME键，蓝色LED灯慢闪，自动回连！

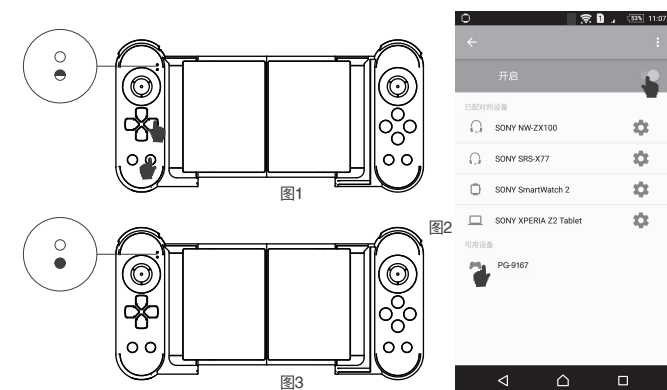

IOS V3 直玩模式:

同时按十字键“左键”+HOME键2秒进入V3直玩配对模式（iOS），手柄蓝色LED灯快闪，当苹果手机/平板搜索到“PG-9167”设备名时，选择连接！连接成功后，手柄蓝色LED灯常亮！已成功连接过，可以直接按HOME键，蓝色LED灯慢闪，自动回连！

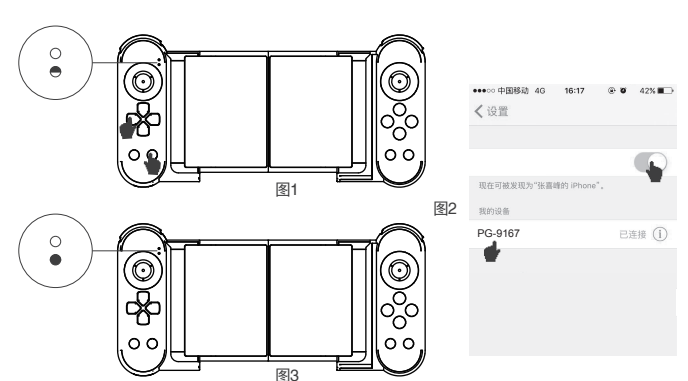

安卓/iOS直玩按键映射功能:

关注公众号（“ShootingPlus”），查看公众号内的默认操作说明，如需设置映射键位，请下载安装“ShootingPlus V3”APP，在APP内进行按键映射以及调整按键位！

本产品默认映射为“绝地求生：和平精英”！




ShootingPlus微信公众号
(关注微信号 下载 ShootingPlus app)

安卓标准游戏模式:

同时按十字键“上键”+HOME键2秒进入安卓标准游戏配对模式，手柄蓝色LED灯快闪，当安卓手机/安卓平板/安卓智能电视搜索到“PG-9167”设备名时，选择连接！连接成功后，手柄蓝色LED灯常亮！已成功连接过，可以直接按HOME键，蓝色LED灯慢闪，自动回连！

安卓游戏平台：葡萄游戏厅

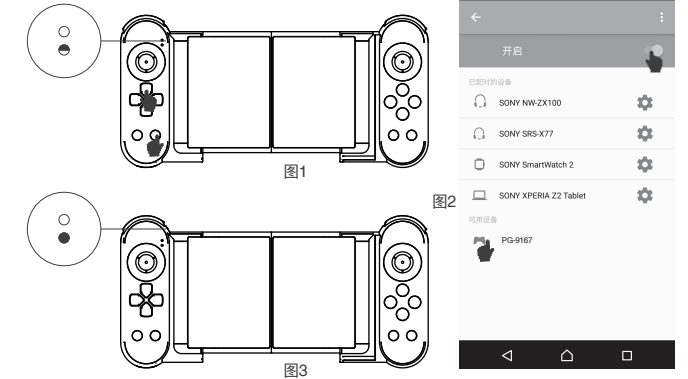

TURBO功能

- a.动作键包括(A/B/X/Y/L1/L2/R1/R2)八个按键，均可手动设置TURBO功能；
- b.设置方式：长按动作键，再轻按TURBO键开启，长按动作键，再轻按TURBO键，TURBO功能关闭；
- c.产品休眠、关机，重启手柄后，之前设置TURBO功能自动清除，若启用TURBO功能，必须重新设置！



手柄充电/休眠/唤醒/关机功能:

- ① 手柄充电功能:
 - a. 低电时，橙色LED灯闪烁提示；
 - b. 充电时，橙色LED灯长亮提示；
 - c. 充满时，橙色LED灯熄灭；
- ② 手柄休眠/唤醒/关机功能:
 - a. 游戏手柄在10分钟内无任何按键操作时自动关机休眠；
 - b. 当需要重新使用时需按HOME键唤醒即可回连；
 - c. 在开机状态下，长按HOME键3秒，产品关机，所有LED指示灯熄灭；

注意事项:

- 1.请不要把本产品放在潮湿或高温地方存储；
- 2.不要敲击、摔打、棒打、刺穿、或试图去分解本产品，以免对产品造成不必要的损害；
- 3.产品内置电池，请勿和垃圾一起丢弃；
- 4.不要在靠近火或其它热源的地方对手柄进行充电。
- 5.非专业人员请勿拆卸本产品,否则不在售后保修服务内；

产品清单:

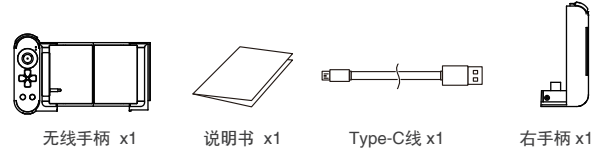

iPega属于 IPEGA LIMITED 所有。

专利号: ZL201930338129.7