


折页线

330.0 mm

160.0 mm


QCY

QCY-T8
TWS智能耳机



使用前, 请先下载安装QCY手机APP客户端
以获得更便捷的耳机操控体验

认识耳机

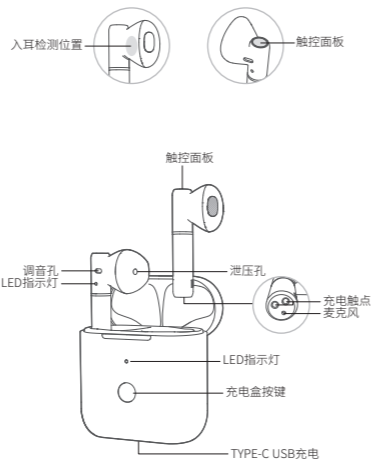


双耳机配对

首次配对方法:

打开充电盒, 耳机自动开机, 开机后双耳自动组队成功, 耳机进入配对状态, 手机搜索连接 “QCY-T8” 即可完成双耳与手机的连接。

切换设备配对方法:

1. 关闭A手机蓝牙, 耳机自动断开进入配对模式
2. 刷新B手机蓝牙设备列表, 点击配对QCY-T8, 完成配对
- *不支持同时连接两台手机, 下次开机默认回连上次配对的手机




恢复出厂设置

方法一: 清除配对记录 (此方法用于无法正常连接时)

1. 已有连接过手机, 在手机蓝牙设备列表中, 找到QCY-T8, 点击进入设置, 选择忽略或取消配对。
2. 取出两只耳机, 同时长按触控面板5秒, 直至红灯长亮2秒后熄灭, 表示进入关机状态。
3. 关机后再同时长按双耳触控面板约10秒, 直至双耳红灯交替闪烁3次, 表示重置成功, 之后双耳会自动开机重新组队。
- *恢复出厂后用首次配对的方法连接即可正常使用



方法二: 打开充电盒子, 长按充电盒按钮10秒至充电盒指示灯显示红灯交替闪烁3下后, 关闭盖子完成重置




佩戴耳机

1. 将耳帽斜向下轻轻塞入耳道, 以轻捏头部耳机不晃动为宜。
2. 通话时, 将耳麦麦克风朝向嘴部可使通话更清晰。
3. 请正确佩戴左右耳机, 入耳后使其稳固贴合耳廓及出音嘴对准耳道
4. 可在APP内选择开/关入耳检测功能

一键进入配对模式

1. 耳机已经与手机配对。
2. 耳麦放入盒子, 打开充电盒子, 长按充电盒按钮3秒至充电盒绿灯闪3下, 耳机断开与手机的连接, 进入配对模式。



单耳机使用模式

1. 双耳有配对历史、且在关机状态下, 长按任一耳触控面板约2秒开机, 等5秒后耳机进入配对状态 (蓝灯闪烁)
2. 打开手机蓝牙搜索配对名, 选择 QCY-T8 点击连接。
3. 连接完成

给耳机充电

耳机放入充电盒, 盖上盖子, 耳机会自动关机, 进入充电状态。

给充电盒充电

未充满电, 充电盒红灯长亮; 充满电, 充电盒绿灯长亮。

产品参数

型 号: XXXXXX 配对名: QCY-T8
蓝牙版本: V5.0 待机时间: 约60小时
充电时间: 约2小时 音乐时间: 约3.5小时
通话时间: 约3小时 通信距离: 10米 (无障碍环境下)
电池类型: 聚合物锂离子电池
耳机电池容量: 3.7V 35mAh
充电盒电池容量: 3.7V 380mAh
充电盒输入参数: 5V == 400mA
支持协议: HSP/HFP/A2DP/AVRCP

功能介绍

更多操作方法请关注二维码

| 使用场景 | 状 态 | 操作 | LED | 语音提示 |
|-----------|-----------------------|---|---------|-------|
| 开机 | 耳机不在充电盒内, 呈关机状态 | 轻按触控面板约2秒 | 蓝灯闪烁 | TONE音 |
| | 耳机在充电盒内 (充电盒有电, 关盖状态) | 开盖, 耳机开机 (有霍尔开关功能) | | |
| 关机 | 开机状态下, 充电盒有电 | 放入充电盒, 关盖 (有霍尔开关功能) | 充电时红灯长亮 | \ |
| | 耳机在开机状态下 | 长按触控面板5秒, 灯灭 | 红灯长亮2秒 | TONE音 |
| 接听电话/结束电话 | 来电响铃中/通话中 | 轻按触控面板两次接听/结束通话 | \ | TONE音 |
| 拒接来电 | 来电响铃中 | 轻按触控面板1秒释放 | \ | TONE音 |
| 唤醒语音助手 | 在连接状态下 | 轻按触控面板三次 | \ | TONE音 |
| 音乐暂停/播放 | 音乐状态下 | 1. 双击; 2. 取下任意耳机音乐暂停, 15秒内戴上耳机, 音乐继续播放 (取下15秒后回到初始状态, 需先手动轻按触控面板两次或点击手机播放) | \ | \ |
| 切换下一曲 | 音乐状态下 | 轻按左/右触控面板2秒, 切换下一曲 | \ | \ |

QCY蓝牙耳机售后服务

QCY蓝牙耳机售后服务承诺: 严格按照《中华人民共和国消费者权益保护法》、《中华人民共和国产品质量法》实行售后三包服务, 服务内容如下:
在三包有效期内, 您可享受购物凭证或本店规定享受免费维修、更换、退货的权利。

1. 自您购买之日起12个月内, 本产品出现故障, 经由QCY售后服务中心确认为产品质量问题, 可享受修理、更换、退货的服务。
2. 自您购买之日起15日内, 本产品出现故障, 经由QCY售后服务中心确认为产品质量问题, 可享受退货或更换的服务。
3. 自您购买之日起12个月内, 本产品出现故障, 经由QCY售后服务中心确认为产品质量问题, 可享受更换的服务。

售后服务与支持
保修期: 自产品购买之日起12个月 (请妥善保管购买凭证)

免费服务: 在产品保修期内, 凡属产品本身质量问题引起的故障, 请用户凭购买凭证与经销商取得联系, 可享受免费服务。

如存在任何产品质量或故障, 非因消费者产品质量本身, 则不在保修范围内, 有下列情形者不属于保修范围:
1. 因火灾、地震、雷击、异常电压、环境因素而发生之故障或损坏;
2. 自行或委托经销商/维修店修理过、擅自改动、改装或更换非原厂零件;
3. 未按使用手册操作或因人为使用不当而造成损坏者, 如产品浸水、腐蚀、摔落、挤压或置放在异常温度环境下。

三包凭证

产品信息:

产品型号: _____

用户信息:

订单编号: _____

用户姓名: _____

联系电话: _____

联系地址: _____

购买信息: _____

销售单位: _____

FAQ

1.Q: 怎么只能听一个?

A: 将两只耳机放回充电盒, 重新取出查看是否恢复双耳模式, 如未恢复重置耳机即可解决。

2.Q: 手机提示无法连接怎么解决?

A: 将手机上的配对记录删除, 删除后重新进行搜索信号连接即可。

3.Q: 怎么听歌/通话没声音?

A: 安卓在手机连接记录的右边有个设置图标, 点击进入, 将两个音频选项取消勾选重新选择, 苹果在设置通用辅助功能进入音频通话方式, 选择自动, 如本来就是自动, 就换其他选项, 然后选择自动, 如未恢复, 删除配对记录重新尝试。

4.Q: 怎么视频/游戏有延迟?

A: 受使用环境、网络、手机解码码速度的影响, 会造成手机传语音数据到耳机时造成不同程度的延迟。

5.Q: 怎么卡顿/断线?

A: 亲, 如果使用时有大量的 Wi-Fi 连接、4G 信号、大功率电器等等产生干扰, 可能会出现卡顿、断续的情况, 换个环境或者重新配对连接下就可以解决了。

若有售后服务需求, 请联系客服

电话: 4008-306-708

网址: www.qcy.com

制造商: 东莞市和电子有限公司

地址: 广东省东莞市道滘镇大岭丫工业区

(粵莞路大岭丫段5号)

产品中有有害物质的名称及含量

| 部件名称 | RoHS Pb | RoHS Hg | RoHS Cd | 有害物质 | | | | | |
|-------|---------|---------|---------|----------------|------------|--------------|----------------|------------|--------------|
| | | | | 邻苯二甲酸酯类 (C6H4) | 多溴联苯 (PBB) | 多溴联苯醚 (PBDE) | 邻苯二甲酸酯类 (C6H4) | 多溴联苯 (PBB) | 多溴联苯醚 (PBDE) |
| 耳机主体 | X | O | O | O | O | O | O | O | O |
| 电 池 | O | O | O | O | O | O | O | O | O |
| 耳 套 | O | O | O | O | O | O | O | O | O |
| 配 件 | O | O | O | O | O | O | O | O | O |
| 充 电 线 | X | O | O | O | O | O | O | O | O |

本表格依据SJ/T 11364的规定编制

O: 表示该有害物质在部件所有均质材料中的含量超出

(EU)2015/863规定的限量要求以下;

X: 表示该有害物质至少在该部件的某一均质材料中的含量超出 (EU)2015/863规定的限量要求, 但目前行业无成熟的替代方案, 在豁免范围内仍符合欧盟ROHS指令的环保要求。



使用年限


如本手册所述, 在正常使用条件下, 本产品的环保使用期限为10年。在此期间, 产品不会造成任何危险物质, 本产品可以回收, 必须按照当地法规处理。

产品认证:




QCY

QCY-T8
TWS Smart Earbuds



For better using experience, please scan to download
QCY app before start-up.

Overview

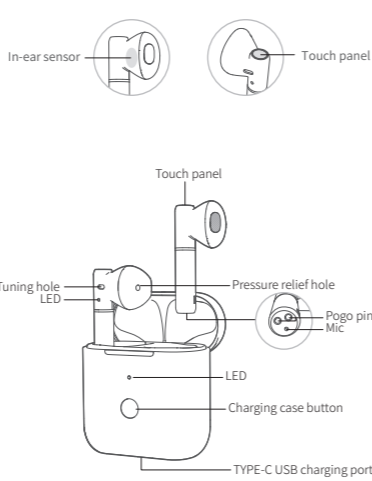


How to Connect

First time connectivity:

Open the case and earbuds will auto power-on, pair with each other and turn connectable. On phone, search for QCY-T8 and tap to connect both earbuds to phone.

Switch connected device:

1. Turn off phoneA's Bluetooth faculty and earbuds will auto disconnect and turn connectable."
2. On phoneB, search for QCY-T8 and tap to connect.
- * Multi-point connection is not available and earbuds will auto reconnect to phoneB upon powering up again.



Factory Setting

(Please refer the following methods to fix connectivity errors)


- Method 1:
1. Delete connectivity record on phone, if any.
 2. Take out both earbuds from case and keep touching both of the panels for 5s or until LED glows red for 3s to power off them.
 3. Once again keep touching both of the panels for 10s or until LED blinks red and blue 3 times to reset them to factory. Earbuds will then auto power on and re-pair with each other.
 - * Refer How to Connect to build connection after Factory Setting.



Method 2: Open the lid and hold charging case button for 10s or until LED of the case blinks red and blue 3 times. Close the lid to reset earbuds to factory.



How to Wear

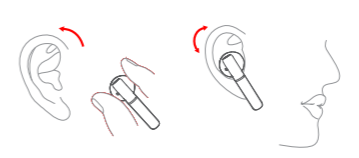

1. Rotate earbud and pop it into your ear then shake head to check wearing stability.
2. Please adjust Mic towards your mouth to gain better calling experience.
3. Please wear earbuds properly, making sure they fit in firmly and sound holes are inside ear channels
4. You may turn on/off In-ear Detection in APP

One Press to Enter Pairing Mode

1. Earbuds have been connected with phone.
2. Pop earbuds into case. Open lid and hold charging case button for 3s or until LED on case blinks green 3 times. Earbuds will then disconnect to phone and enter pairing mode.



Mono Mode

1. Earbuds were paired before. Keep touching panel on either earbud for 2s to power on them. They will auto turn connectable in 5s (LED will blink blue).
2. On phone, search for QCY-T8 and tap to connect the earbud to phone.

Charge the Earbuds

Push earbuds into the case and close the lid. Earbuds will auto turn off and to be charged.

Charge the Case

LED of the case will glow solid red when charging and turn green once topped up.

Parameters

Model: TWS Smart Earbuds Pairing name: h2004A
Bluetooth version: V5.0 Standby time: approx. 60hr
Charging time: approx. 2hr Music time: approx. 3.5hr
Talk time: approx. 3hr
Operation range: 10m (with no obstacle)
Battery type: Li-Ion
Battery capacity (earbud): 3.7V 35mAh
Battery capacity (case): 3.7V 380mAh
Input parameter (case): 5V == 400mA
Bluetooth profiles: HSP/HFP/A2DP/AVRCP

Tips

1. Before using the headset, please read the manual carefully and keep it for future references.
2. The headset need to be fully charged prior to first-time use.
3. If the headset is left unused for over two weeks, please recharge it periodically.
4. Please use the chargers made by qualified manufacturer.
5. If the headset cannot be found by your phone, please check whether it is in pairing mode. If left unconnected for a long while, the headset will exit pairing mode, please re-enter the mode; if a procedure error of your phone occurs, reboot it; if a procedure error of the headset occurs, reboot or reset it.

Caveats

1. Never disassemble or modify your headset for any reasons to avoid any damages and danger.
2. Do not store the headset in extreme temperatures (under 0°C or over 45°C).
3. Avoid using the indicator close to the eyes of children or animals.
4. Do not use this headset during a thunderstorm to avoid irregular function and increased risk of electric shock.
5. Do not use harsh chemicals or strong detergents to clean the headset.
6. Keep the headset dry.

