

LONPOO


MINI HI-FI AMPLIFIER

615



QUICK START GUIDE


1 Power ON/OFF

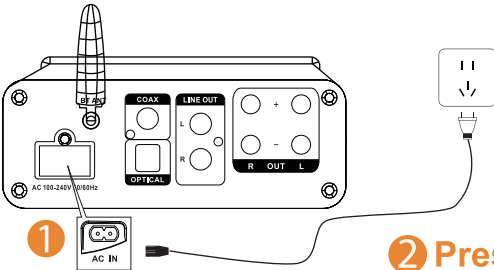


1

2

2 Press to Power ON
Press and hold to Power OFF



2 Applicable Devices

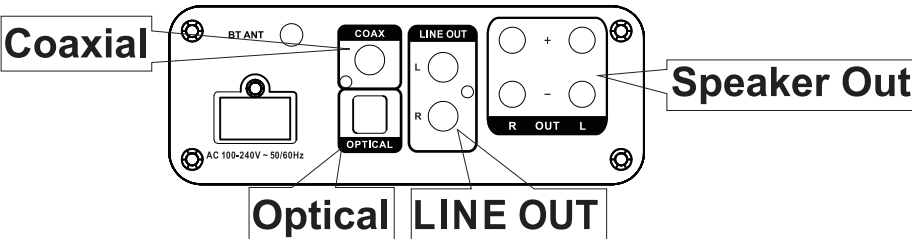

Coaxial

BT ANT

COAX

LINE OUT

Optical


LINE OUT

Speaker Out

AC 100-240V ~ 50/60Hz


Coaxial/Optical IN: Compatible with DVD player, projectors, TV etc
Line out: Compatible with active speaker
Speaker out: Compatible with passive speaker

3 Bluetooth Connecting

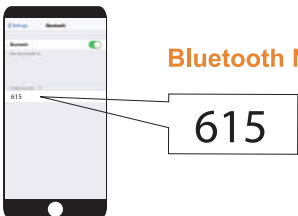


Bluetooth Name

615

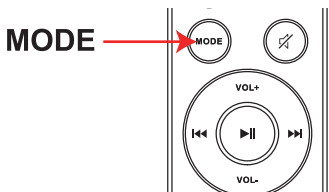

MODE

4 Front Panel

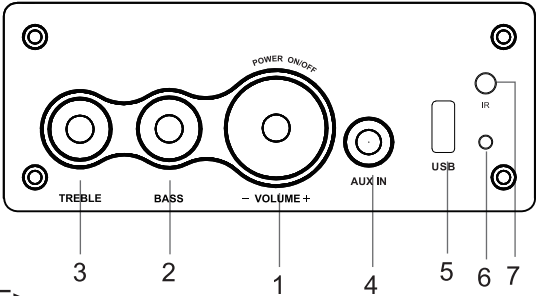

1. Power ON/OFF>
Sources/Modes>
Volume +/-

● **Power ON/OFF**

Press the knob to Power ON the unit
Press and Hold the knob to Power OFF the unit

● **Sources/Modes**

Press the knob to change the modes
(Bluetooth/AUX/USB/Coaxial/Optical)

● **Volume +/-**

Turn the knob to volume up/down


The button can be rotated 360 degrees, and there will be a "beep" sound when the volume reaches the maximum.

2. Bass +/-
3. Treble +/-
4. AUX Input
5. USB in
6. Power Indicator Light
Red: Standby
Blue: Bluetooth
Green: AUX
Yellow: Coaxial
Light Blue: Optical
7. Remote Sensor


5 Optical/Coaxial Connection

Press MODE to select Optical or Coaxial Mode.

MODE

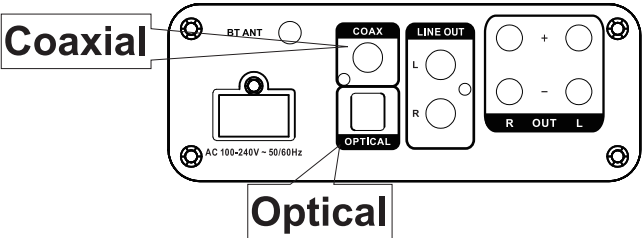

6 AUX in/USB Connection

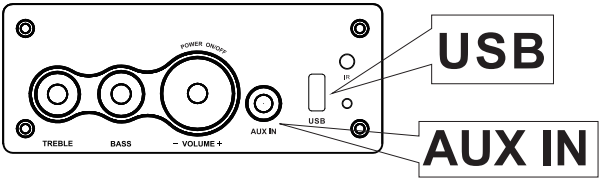

NOTE

No need to select modes when using USB and AUX, insert the sound source directly and it will start to play the sound automatically

7 Product Specifications




LP-615 is a Hi-Fi wireless stereo 2-channel amplifier featuring 100W x 2 output,Bluetooth 5.3 allowing, 50 ft (15m) streaming range.

Input Mode:	Output Mode:	Bluetooth Version:
Bluetooth/AUX/USB/ Coaxial/Optical	Sppeaker out/ Line out	Bluetooth 5.3
Bluetooth Pair PIN Code:	SNR:	Input Sensitivity:
0000 or 1234	≥ 98dB	≤ 280mV
THD:	Max Output Power:	Power Supply:
≤ 0.5%	100W + 100W	100-240V/50-60Hz
Terminating Impedance:	Bluetooth Transmission	Distance:
2Ω - 8Ω	Up to 50 Ft	0-10M
Frequency Range:	Product Weight:	Product Size:
20Hz - 20kHz (±1 dB)	0.789KGS	175X140X55MM

This Unit works great with any 2-8Ωpassive speakers.

8 Remote Control

**Install two AAA size batteries(not included).
Make sure to match the “+” and “-”**

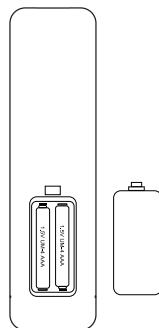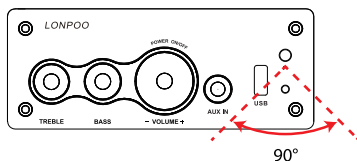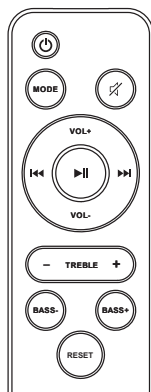

Standby/ON button

Press to turn on your Amplifier.
Press again to return your Amplifier to standby mode.

MODE

Press to cycle through the sound sources Bluetooth/AUX/USB /Coaxial/Optical.

MUTE

Press to enable/disable the audio output.

(PLAY/PAUSE)

Press to begin playback, press again to pause playback.

Press to Skip to a Previous/Next track.
Press and hold to fast backward/fast forward.

Volume+/-

Raise/lower the volume

- TREBLE +

Raise/lower the treble

BASS- / BASS+

Raise/lower the Bass

RESET

Press to reset the Bass/Treble as default.
Press and Hold to reset the Volume as default.