

## KWM-1 Wireless Microphone - User Guide



### Introduction:

Thanks for choosing our **pTron KWM-1** Wireless Mic. **pTron KWM-1** is a smart wireless microphone that provides professional-grade recording output. Plug and play—no app required.

### Note: If you're experiencing connectivity issues with your Android smartphone:


- Go to **Settings** → Search for **"OTG"** → Enable **OTG power supply**.
- Still facing issues? Contact our support team—we're happy to help!

**Multiple Uses:** It can be used for multiple purposes, such as.

💡 LIVE STREAMING. 📹 VLOGGING. 🗣️ INTERVIEWS. 🎧 RECORDING. 👤 ONLINE TEACHING.

The wireless microphone consists of three parts:

- Microphone Transmitter - 2
- Receiver - 1

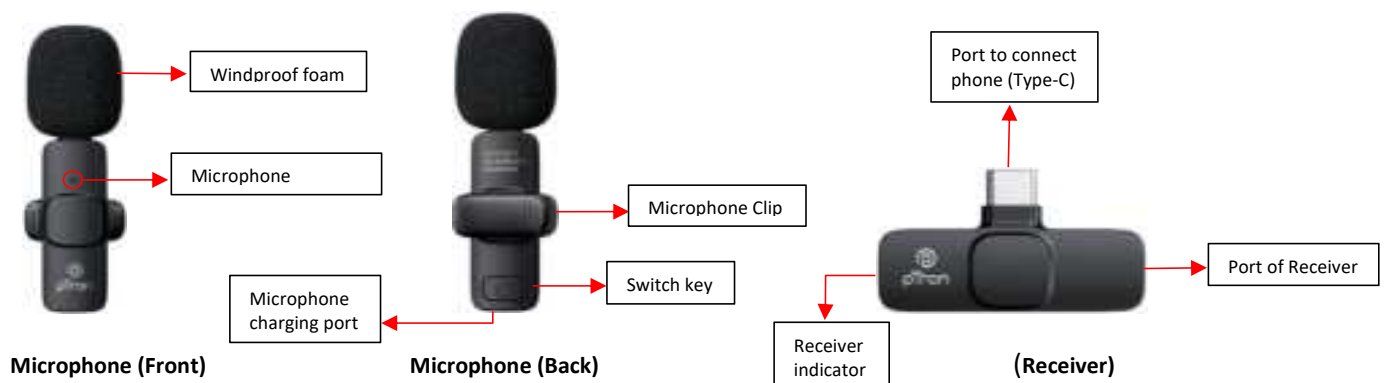

### How to Use :

#### Step 1: Connect the Receiver

Connect the receiver to your mobile phone's port. The indicator light on the receiver will flash.

#### Step 2: Power On & Pair


Press the power button on the microphone. The red and green indicator lights will stay on, which means the pairing is successful.

#### Step 3: Start Recording

The light on the receiver will stay on. You can now use the microphone in your phone's camera to pickup sound, live video, and other audio-recordings.

### Indicator Guide (Microphone)

Function	Action	Light
Power On	Long Press Switch Key	Red and Green
Power Off	Long Press Switch Key	light off
Charging	Connect Type-C cable	Solid Red (while charging)
Pairing	Automatic after power-on	Flashing Red/Green
Paired	Successful connection	Green



**Charging the Microphone:** Use the included Type-C cable. Full charge takes approx ~ 1 hours.

**Receiver:** No charging required. It draws power directly from your device.

**Packing Box Content:**

Microphone×2, Receiver×1, Charging Cable×1, User Manual / Warranty QR Code×1

**Safety & Compliance**

- Avoid exposure to water, heat, or dusty environments.
- Only use the included or pTron-approved charging accessories.
- Do not overcharge or tamper with the battery.
- Keep out of reach of children.
- Dispose of the product responsibly, following local regulations.

**Troubleshooting Guide**

**1. Microphone not turning on:**

Make sure the microphone is charged. Use the included Type-C charging cable and charge it for at least 1 hours. The charging indicator light should turn on during charging.

**2. Receiver light not flashing after connection:**

Ensure the receiver is properly connected to your phone. On Android phones, go to Settings and search for “OTG”. Make sure the OTG power supply option is turned on.

**3. Audio recording is distorted or unclear:**

Keep a distance of about 6–12 inches between your mouth and the microphone. Avoid recording in noisy environments for better sound clarity.

**4. Microphone and receiver not pairing:**

Power off both the microphone and the receiver, then restart them. Ensure they are both fully charged and try pairing again in an area with minimal interference.

**5. Receiver gets hot when plugged in:**

Unplug the receiver and let it cool down. Reconnect it using a stable USB-C port or adapter.

**6. Charging light not turning on:**

Check the charging cable connection. Try using another compatible Type-C cable if needed, and make sure the cable is securely inserted into the charging port.

**7. Echo or noise during recording:**

Keep the microphone away from your phone’s speaker while recording. Also, lower the speaker volume to avoid feedback or echo issues.

**Warranty Information:**

- ☑ Covered: Manufacturing defects under normal usage.
- ☒ Not Covered: Accessories or damage from misuse.
- ☑ Product Registration is mandatory to claim warranty: <https://ptron.in/apps/product-registration>
- ☑ Please read through the complete warranty details at: <https://ptron.in/pages/repair-service-warranty>

**Customer Care Details:**

**Mail:** support@ptron.in

**Tel:** 040 - 67138888

**Service Centers List:** <https://ptron.in/pages/ptron-service-centers>