


5-Bar Ratings

	✓	The connector is clean and in perfect condition.
	✓	The connector is clean and in good condition.
	✓	The connector is in good condition. Try cleaning it to improve its condition.
	✗	Consider replacing the connector after multiple cleaning attempts.
	✗	Consider replacing the connector after multiple cleaning attempts.



Inspecting Single-Fiber Connectors

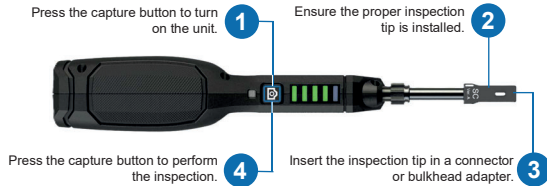

Compatible with
EXchange

When paired with EXFO Exchange, the unit will automatically upload the results via Bluetooth.



Startup / Bluetooth Connection / Inspection

LEDs	Meaning
	The FIP-200 is starting up.
	New Bluetooth connection: Press the capture button to confirm the connection.
	The FIP-200 is ready to take a capture.
	The autofocus, capture or analysis process is in progress.
	The capture process is complete. You can now remove the inspection tip from the connector.

Inspection Errors

LEDs	Meaning
	Autofocus timeout: Clean the connector and ensure the connector/tip is inserted correctly.
	Positioning error: Hold the FIP-200 straight and retry.
	Focus quality error: Hold the FIP-200 steady and retry.
	Hardware error: Contact EXFO Technical Support for assistance.

EXFO Technical Support: 1 866 683-0155 (USA and Canada)
Tel.: 1 418 683-5498
support@exfo.com

Scan the QR code to access the support page for more information:
www.exfo.com

