



Portable BT Speaker

**ZEB DAWN50**



## User Manual

[www.zebronics.com](http://www.zebronics.com)



Thank you for purchasing **ZEB-DAWN 50** BT speaker. Please read this user manual carefully before operation & save it for future reference.

**Note:**

- Avoid the usage of this product at high-temperature and high-humidity environments.
- Avoid the self-disassembling of the product or it will result in voiding the Product's warranty.
- Please charge the product with power adapter output rated voltage DC 5V.

To know more about Terms and conditions for warranty policy, please visit:

<https://zebronics.com/pages/warranty-policy>

**Features:**

- 16W RMS Output
- Upto 8h\* Backup
- Dual 52mm Drivers
- TWS Function
- BT v5.3 | USB | mSD | AUX | FM
- Call Function
- Fabric Finish
- Media / Volume control
- Type-C Charging
- Built-in Rechargeable battery

## Specifications:

Output Power (RMS) : 16W (8W + 8W)

BT Version : v5.3

Driver Size : 52mm x 2

Speaker Impedance : 3Ω

Frequency Response : 80Hz-20kHz

S/N Ratio : 85dB

Separation : ≥45dB

Max Supported

USB/mSD memory size : 32GB

Supported Audio formats : MP3

Charging time : 4h

Playback time : 8h\*

Product Dimension

(Dia xH) : 7.95 x 40cm

Net. Weight : 708g

*\* at 50% Volume*

## Package Contents:


Speaker : 1 U

Charging cable : 1 U


Input cable : 1 U

QR Code Guide : 1 U

## Button Incriptions:

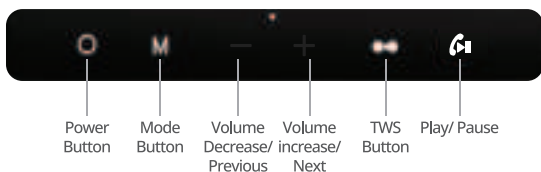

## Port Incriptions:

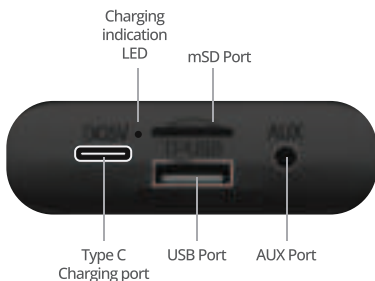

## Button functions:

1. Long Press the Power button for ON/OFF the Speaker.
2. Short press the **"M"** button to change the input mode of the speaker.
3. Long press the **"+/-"** button to change the NEXT/ PREV track or channel when in BT /USB/mSD mode or FM mode respectively.
4. Short press the **"+/-"** button to increase/ decrease the speaker volume.

5. Short press the "**CALL**" button to Play/Pause the track being played.
6. Long press power button to power ON/OFF the speaker.
7. During calls, short press the "▶||" button to attend / end call.
8. Single press "▶||" the button to Play/Pause. Double press "▶||" the button to redial the last dialed number

## **General Instructions**

### **BT Mode:**

Power ON the speaker, it will enter into BT pairing mode, open Bluetooth settings in your phone and search for the BT name "**ZEB-DAWN 50**" and tap to connect it.

### **USB/Micro SD Mode**

Connect the USB/ micro SD card device to the respective ports of "**ZEB-DAWN 50**" and the speaker would automatically start playing from the USB / micro SD card device.

### **AUX Mode:**

Connect the speaker to an audio source (Phone, TV, PC) using 3.5mm AUX cable. Once connected, change the speaker to AUX mode

and thereafter audio can be streamed via the speaker from the connected source.

### **FM Radio Mode:**

Short press "M" button can switch to FM mode. Once the speaker is in FM mode, Long press the "▶||" button once to start scanning for FM channels. Once scanning is complete, Long press the "+/-" button to change the channels.

*Note: Please use Charging cable as antenna for better FM signal reception.*

### **TWS (True Wireless Stereo) Function:**

When two speaker are in Bluetooth mode, long press "TWS" button of one speaker to enter TWS mode, It will search and connect with another speaker automatically, when two speakers connected successfully, you can control two speaker at the same time.

*Note: Requires two ZEB-DAWN 50 speakers for TWS feature*

### **Charging the Speaker:**

1. Connect the Type-C charging cable to the DC 5V charging port of the speaker and insert the other end into a USB power adapter.

2. Red LED glows, indicating that the battery is being charged. After full charge, the red LED goes OFF.