



# V007 Update

## The upgrade process:

**Step 1:** First, you need to connect the V007 to the PC via usb cable.


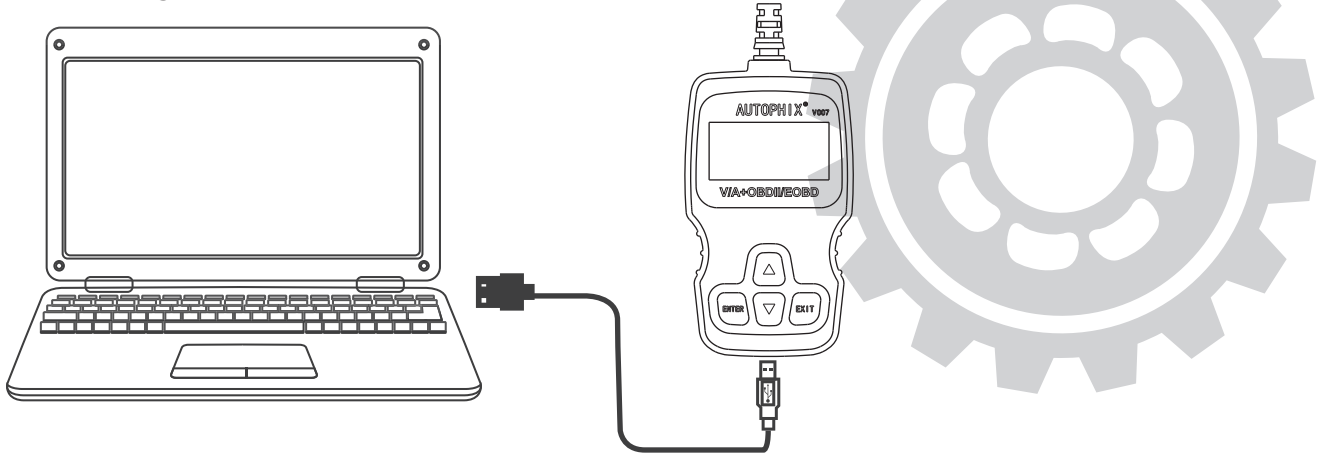


**Step 2:** Open the software.

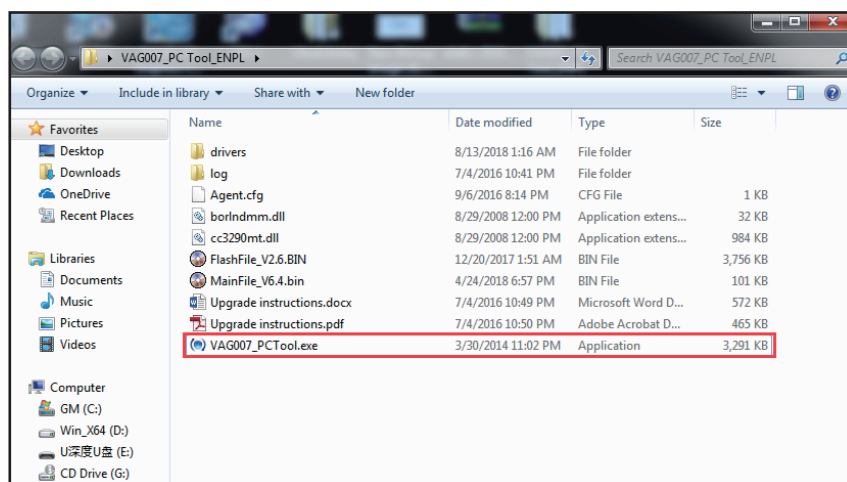


Install the driver.


The installation would be completed after clicking "OK" and then you should exit the driver installation interface.

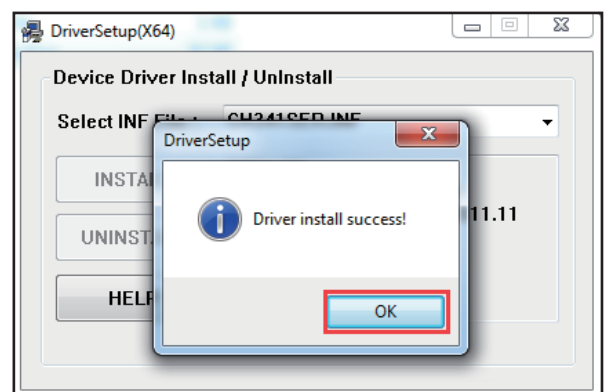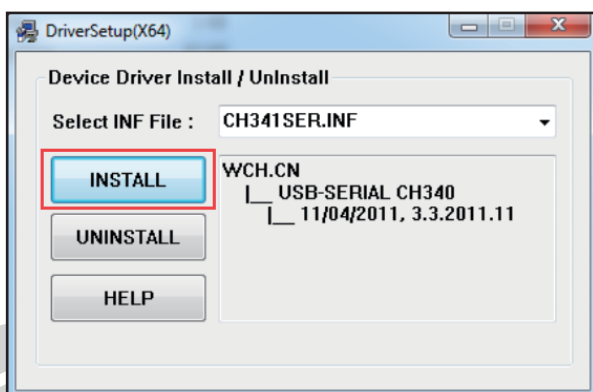


### Step 3: Reopen the upgrade software.

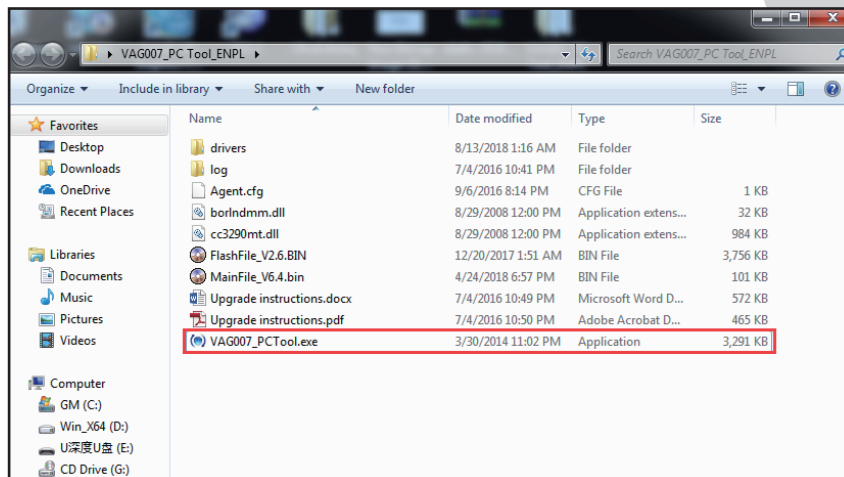


Select the correct COM port number.

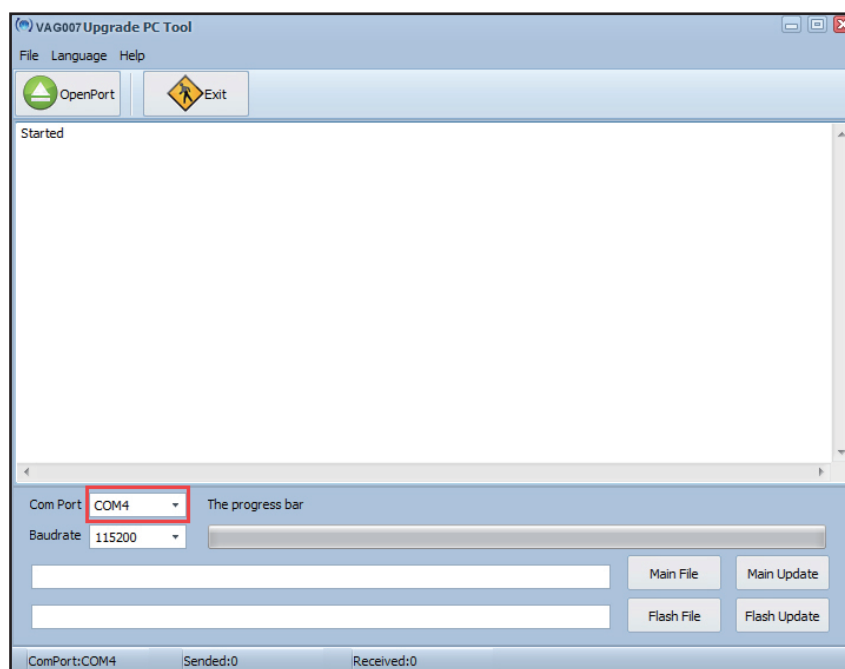


You can get the option and serial port COM port number by checking your Device Manager.

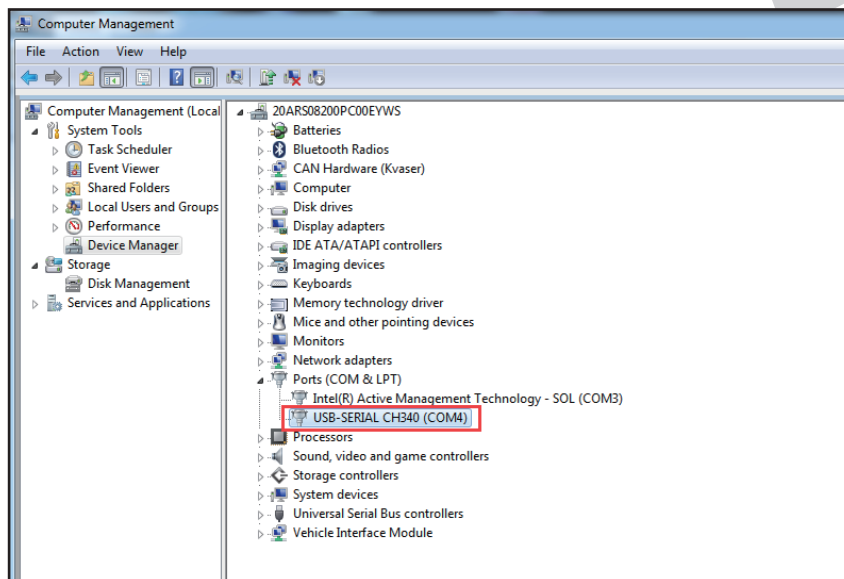


**Step 4:** Click the “**Main File**” to select upgrade file path.  
Select the upgrade file, then click “**Open**”. <Upgrade file format is **FlashFile\_V2.6.bin** >

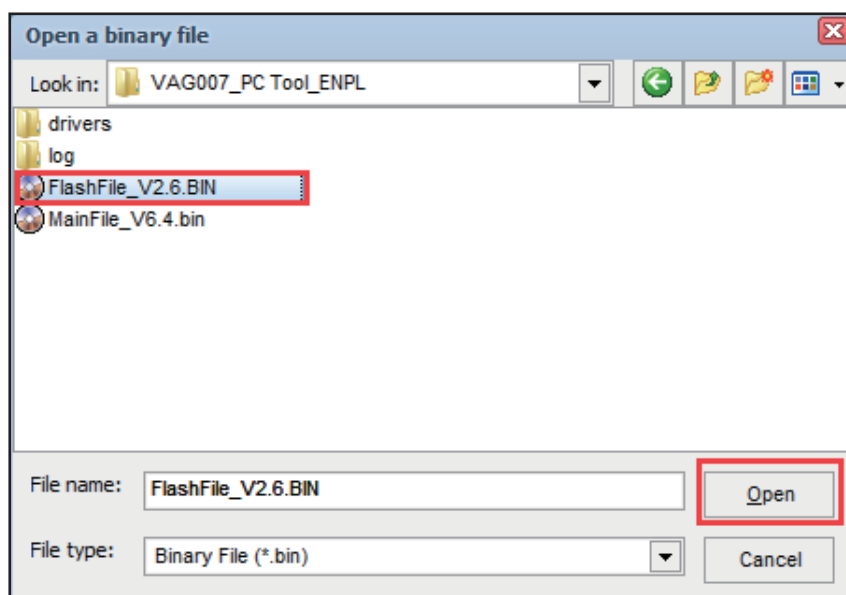

Click the "Open Port" to open the serial port.  
Click the "Main Update" to upgrade.

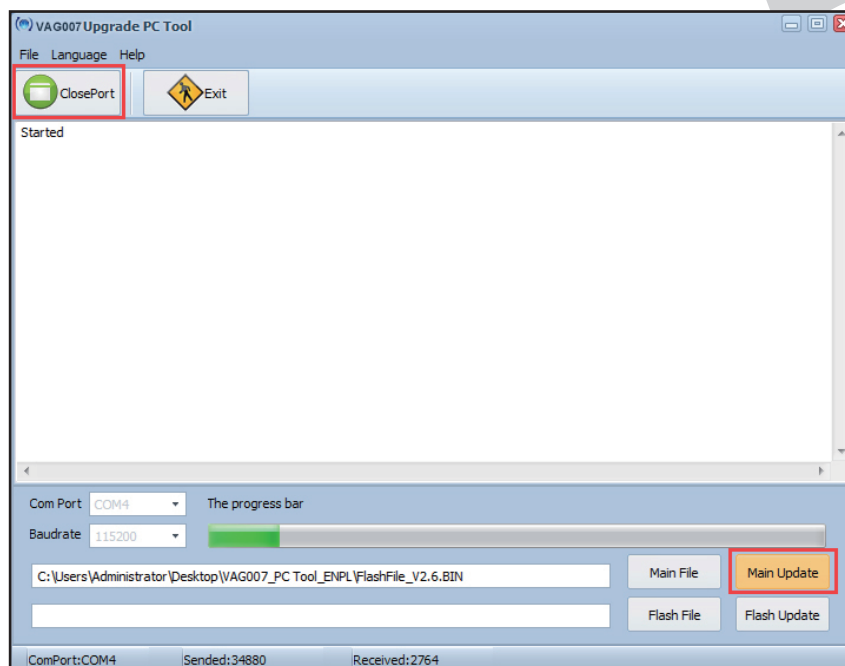


Upgrade successful prompt:  
After update successful , pull out the upgrade line after the device's main interface appear.

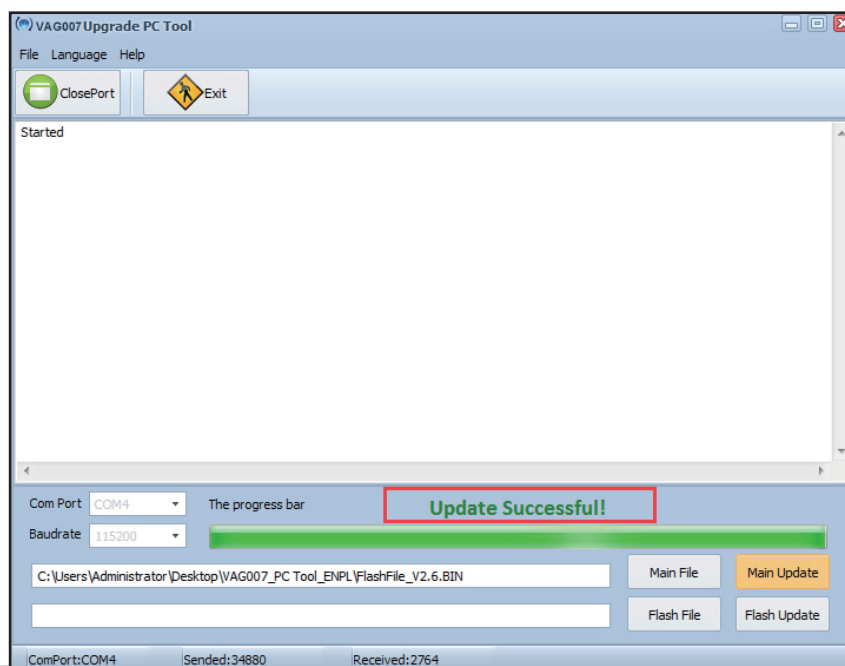


**Note:** If you can't find the COM port, please check whether the equipment connected to PC successfully, and then reopen the software to upgrade.


**Step 5:** Reunplug the data line, click "**Close String**" and "**Open String**" again!

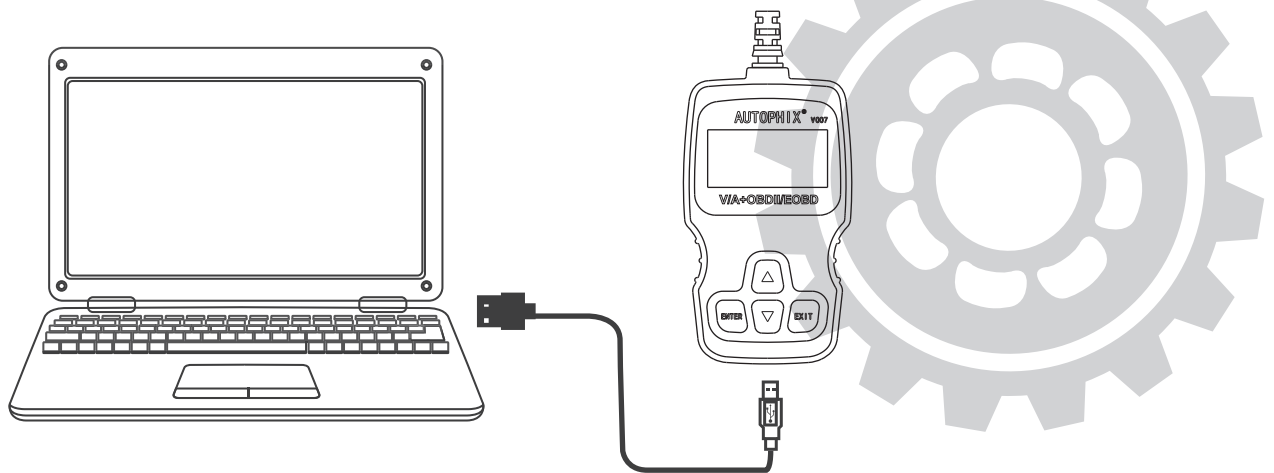


Click "**FLASH File**" to select **MainFile\_V6.4.bin** in the popup dialog.

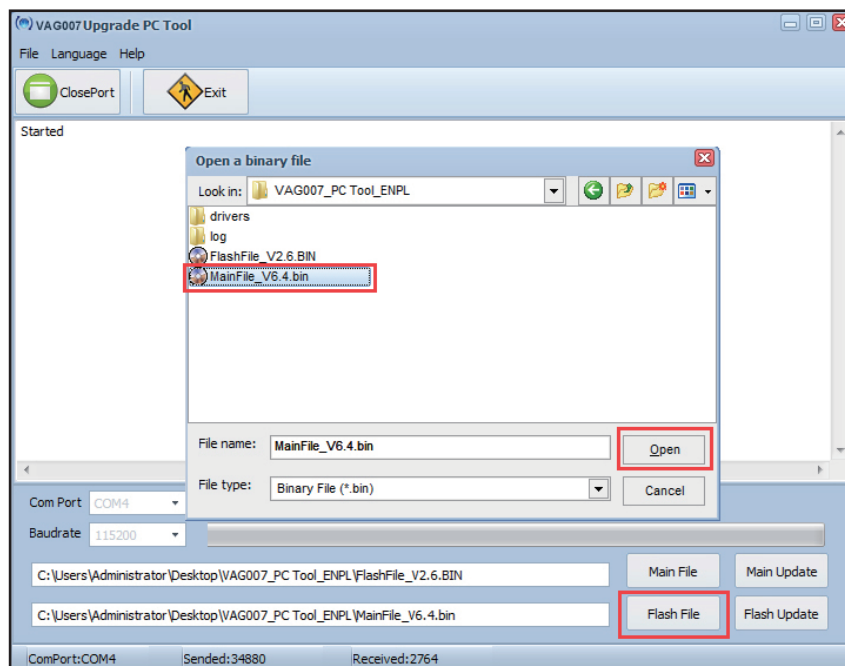

Click "**FLASH upgrade**", then the upgrade begins, this process may be longer  
Please wait patiently!

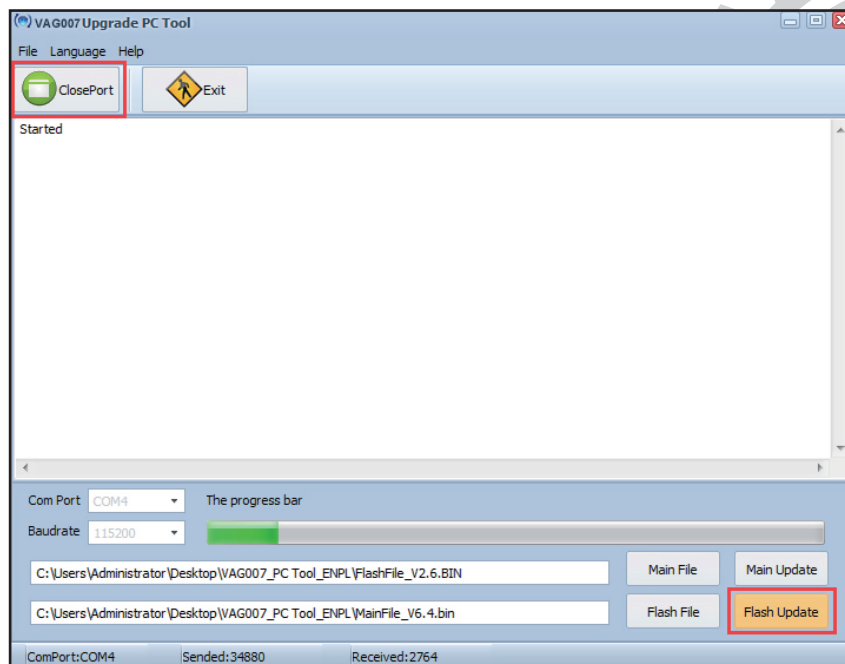

Upgrade success will appear boot interface, at this point you can rest assured to use!

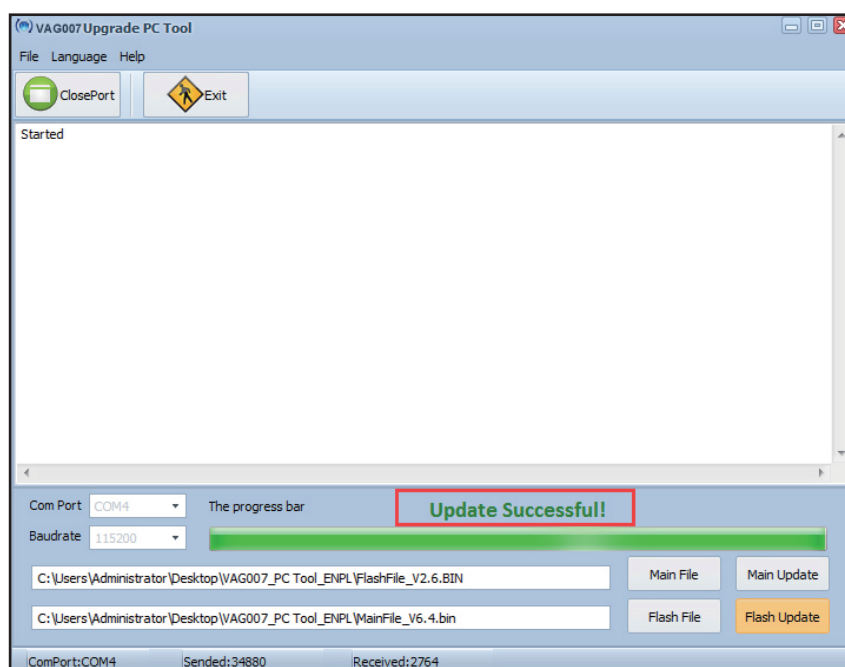

**Another:** Please refer to the upgrade instructions in detail during the upgrade process. If the upgrade fails, do not worry about it. Re-upgrade according to the upgrade steps and will not affect the normal use of the device.