




Iris 5 Spectra

ENG Features

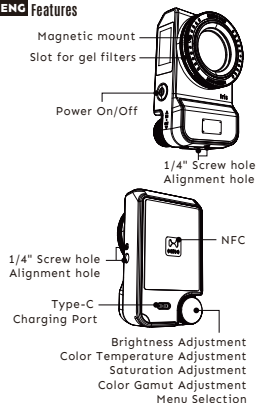

Power On/Off

1. Power On: Long press the power button for 1.5 seconds, then rotate the knob clockwise to turn on the light.
2. Power Off: Long press the power button for 1.5 seconds to turn off the light.



White Light Mode

When powered on, short press the power button to switch between brightness and color temperature adjustment surfaces.

Brightness Adjustment

1. Rotate the knob to adjust brightness.
2. Adjustable range: 0 - 100%.
3. Short press the knob for shortcuts.



Color Temperature Adjustment

1. Rotate the knob to adjust color temperature.
2. Adjustable range: 1700K-10000K.
3. Short press the knob for shortcuts from 2700K to 6500K.



RGBCW Mode

Mode Switching

1. Long press both the power button and knob for 1.5 seconds to switch to RGBCW mode. Long press both again for 1.5 seconds to switch back to White Light Mode.
2. In RGBCW mode, short press the power button to switch between brightness, saturation and color gamut adjustment interfaces.



Brightness Adjustment

1. Rotate the knob to adjust brightness.
2. Adjustable range: 0-100%.
3. Short press the knob for shortcuts.



Saturation Adjustment

1. Rotate the knob to adjust saturation.
2. Adjustable range: 0-100.
3. Short press the knob for shortcuts.



Color Gamut Adjustment

1. Rotate the knob to adjust the color gamut.
2. Adjustable range: 0-360.
3. Short press the knob for shortcuts.



Menu Selection

1. Long press the knob for 1.5 seconds to enter the menu selection interface.
2. Rotate the knob to select the menu.
3. Short press the knob to enter the sub-menu.
4. Long press the knob for 1.5 seconds to exit the menu interface.



Installation of V-mount Plate:

Please align the bolt and locating pin of the V-mount Plate with the screw hole and locating hole at the bottom of Iris, and then use the allen wrench to rotate clockwise and secure.



⚠ WARNINGS

- Please thoroughly read the manual prior to operating the product and operate in strict accordance with the manual.
- Don't disassemble the product by yourself. If the product requires repair, contact our maintenance personnel.
- Product failures caused by unauthorized disassembly are not covered by warranty, and will be chargeable.
- Don't touch the heat generating parts of the product during operation to avoid scalding injury.
- The power must be switched off during set-up and break down of the product.
- Don't submerge the product in water or other liquid/s to avoid safety risk and product failure.
- Allow the product to properly cool after each use before storage.
- The product contains batteries. Don't store the batteries in hot environments and keep them away from fire.
- Only use the originally supplied accessories to avoid product failure/s.

Product Specifications

Iris 5 Spectra	
Power	5W
Lumens (10000K)	200lm
Lumens (6500K)	300lm
Lumens (2700K)	200lm
Lumens (1700K)	150lm
Input	AC 100-240V, 50-60Hz
	DC 5V
Battery	3.7V 2000mAh, 7.4Wh
CRI	96
TLCI	96
CCT	1700K-10000K
Dimming	0-100%
	36000 Colors
RGBCW	Color Gamut: 0-360
	Saturation: 0-100
	Intensity: 0-100
Wireless Method	Bluetooth
Wireless Operating Range	20m / 65.6ft
Protection Class	IP54
Operating Temperature	-10-40°C / 14-104°F
Dimension (Light)	86x50x31mm/3.39x1.97x1.22in
Net Weight (Light)	160g / 0.35Lbs

Warranty Terms

We provide a two-year warranty period for the original buyer of the product. For the detailed warranty scope, please log in our website.

Important notes:


- Please retain your original purchase invoice and warranty card and ensure that the complete supplier information is on the invoice, including the purchase date and product serial number, which will be needed when making a claim against the warranty.
- The warranty does not cover:
 - Damage caused by improper use, false wiring, incompatible, poor quality or mis-adjusted external devices.
 - Damage to the appearance of the product from mishandling or abuse.
 - Exposure to rain or water.
 - Damage caused by transportation. Please contact your dealer to issue a claim.

The warranty will be invalid if:

- The product serial number has been torn off or can't be identified.
- The product has been repaired or modified by unauthorized persons.

App Download

You can download the Harlowe app in the (Apple) App Store and Google Play store by scanning the following QR code.



For more information, please visit www.harlowe.com or scan:



HARLOWE.COM

AEC LIGHTING SOLUTIONS CO., LTD
2448 Baoan Highway, Jiading District, Shanghai 201801, China

