



Porodo Soundtec


Aqua Beat Bone Conduction Earphone

SKU: PD-STWLEP031


Table of Contents

Wearing Method	2
Package Content	2
Power On/Off	3
Pairing Guide	3
Call Management	4
Voice Assistant	5
Music Playback	6
Automatic Reconnection	6
Switch to TF Card Mode	7
Battery Level Voice Prompt	7
Switch Playback Mode	7
Pausing Playback	7
Battery and Charging	7
Reset	8
Specifications	8
Cleaning and Maintenance	8
Warranty	9
Contact Us	9


Wearing Method

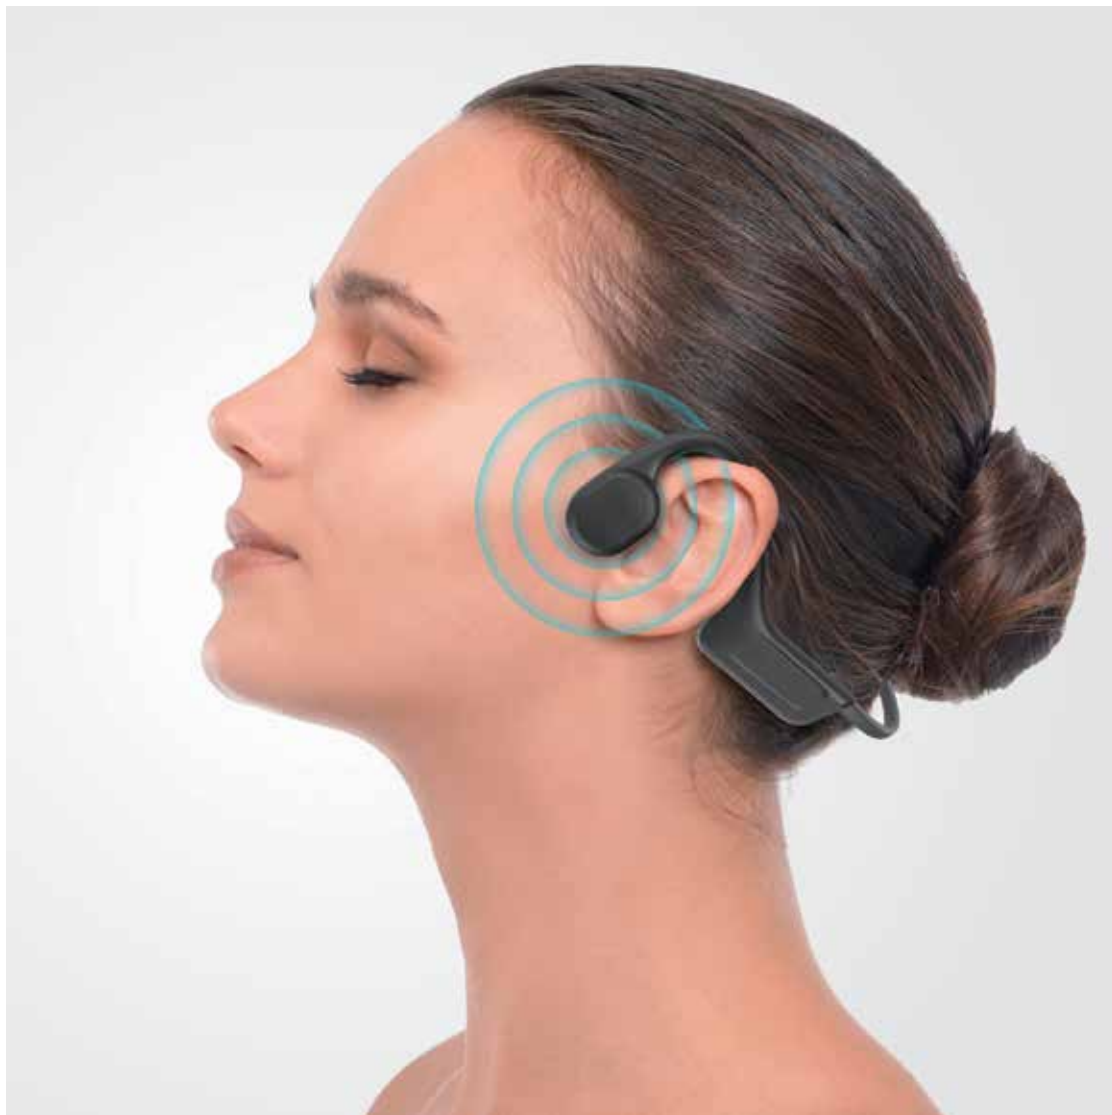


Package Content



Earphone



Storage Bag



Cable




Strap




Earplugs

Power On/Off

Power On: When the headset is off, press and hold the power button for 3 seconds. The blue LED light will illuminate for 1 second, and an audio cue will play.

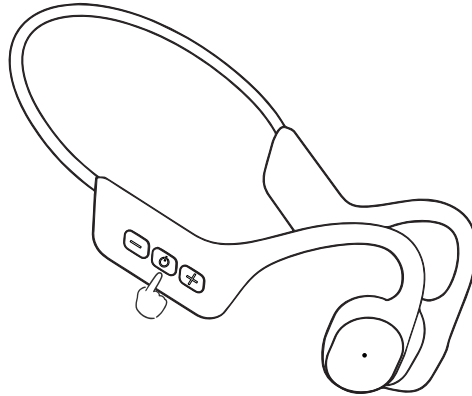


Power Off: When the headset is on, press and hold the power button for 3 seconds. The red LED light will illuminate for 1 second, accompanied by an audio cue.

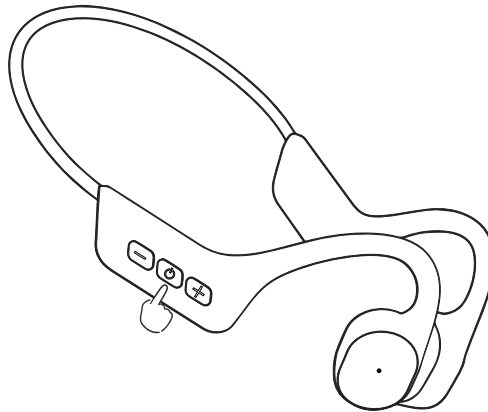

Pairing Guide

When the headset is off, press and hold the power button for 3 seconds. The device will automatically enter pairing mode upon turning on. The LED indicator will flash red and blue alternately, and a prompt tone will sound to confirm pairing mode is enabled. Activate Bluetooth connection on your device. Search for and pair with device named “PD-STWLEP031”.

When the earphone successfully connects to the device, the blue LED light will remain on for 3 seconds before turning off, accompanied by an audio prompt.

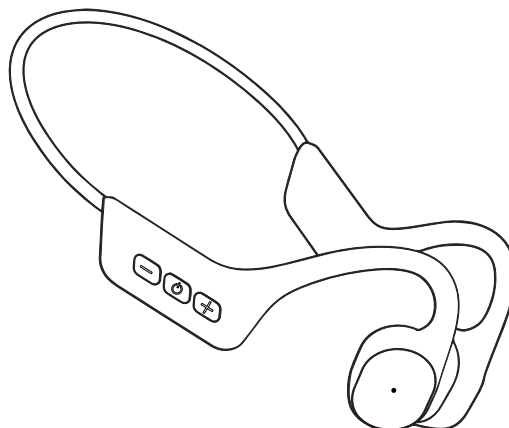


Call Management

[A] Automatic Shutdown

If the headset is idle for more than 5 minutes after being powered on, it will automatically shut down. This automatic shutdown feature is disabled once connected to a Bluetooth device.


[B] Dial Cancellation

Press the switch button to end the call before the other party answers.

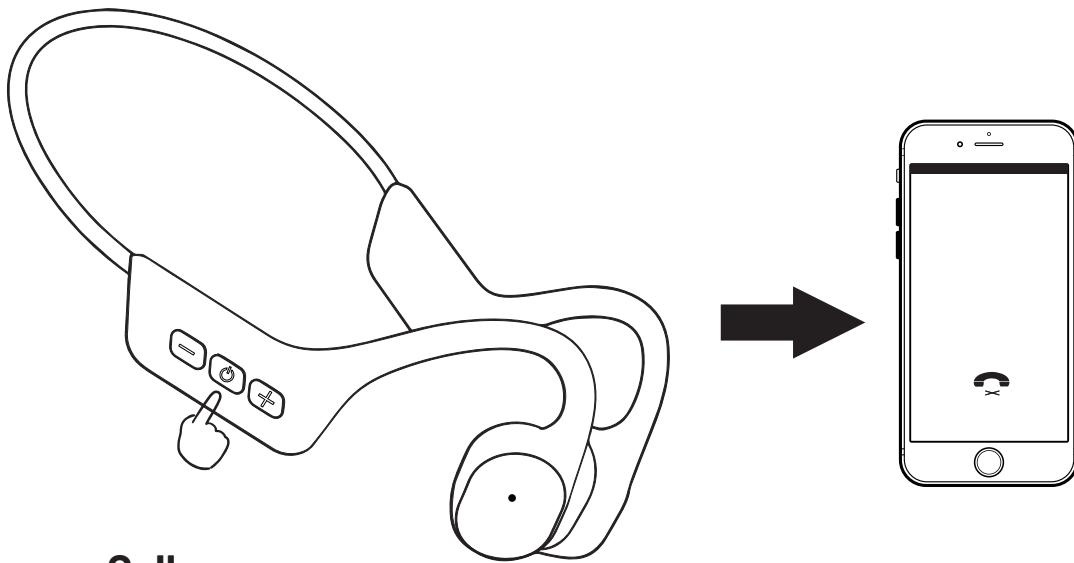


[C] Answer a Call

To answer an incoming call, press the on/off button. To switch between a Bluetooth call and a regular phone call, press and hold the on/off button for one second after answering the call.

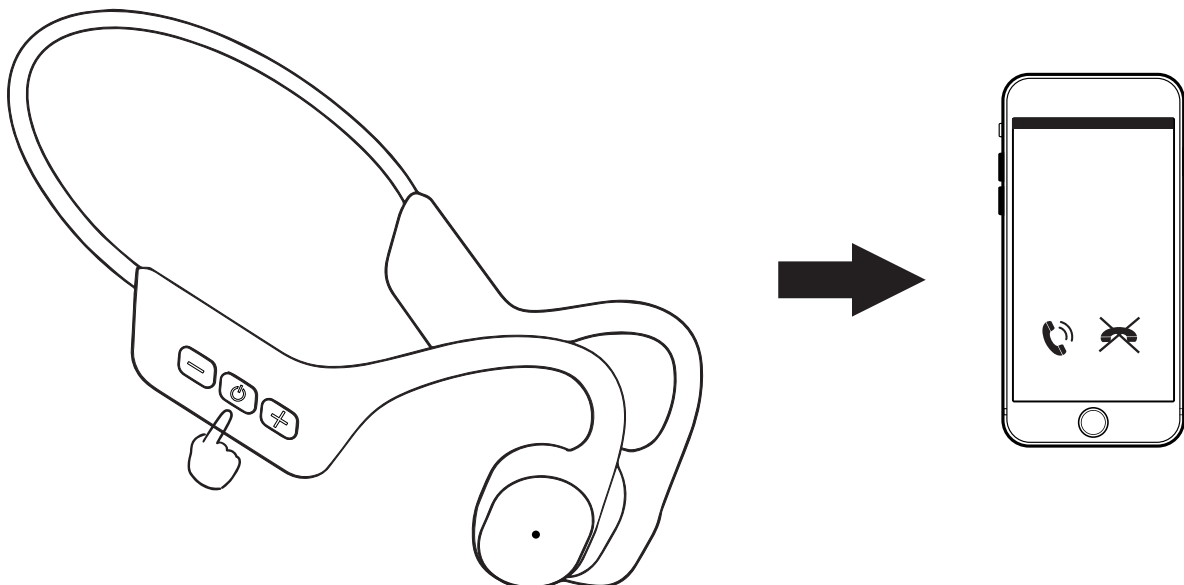


[D] Rejecting a Call

To decline an incoming call, press and hold the switch button for one second.

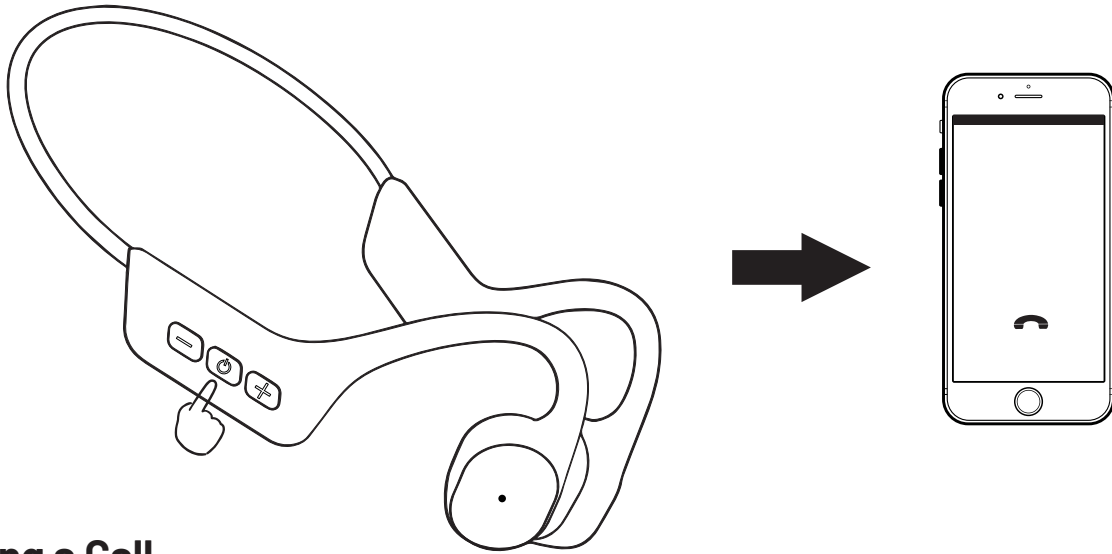


[E] Ending a Call

To disconnect the call, press the switch button when the conversation is over.

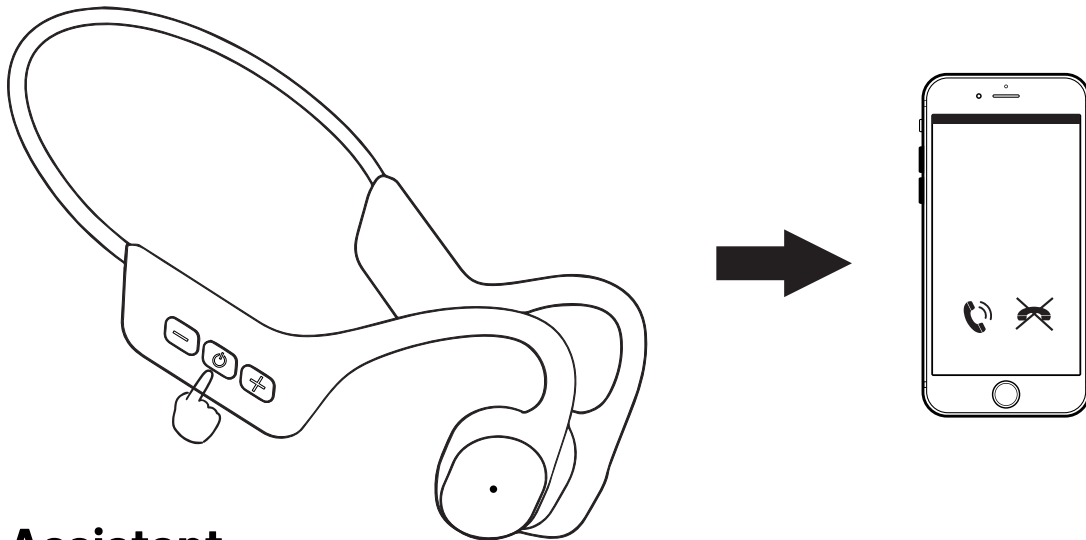


Voice Assistant

Press the power button four times in quick succession to enable the SIRI function.

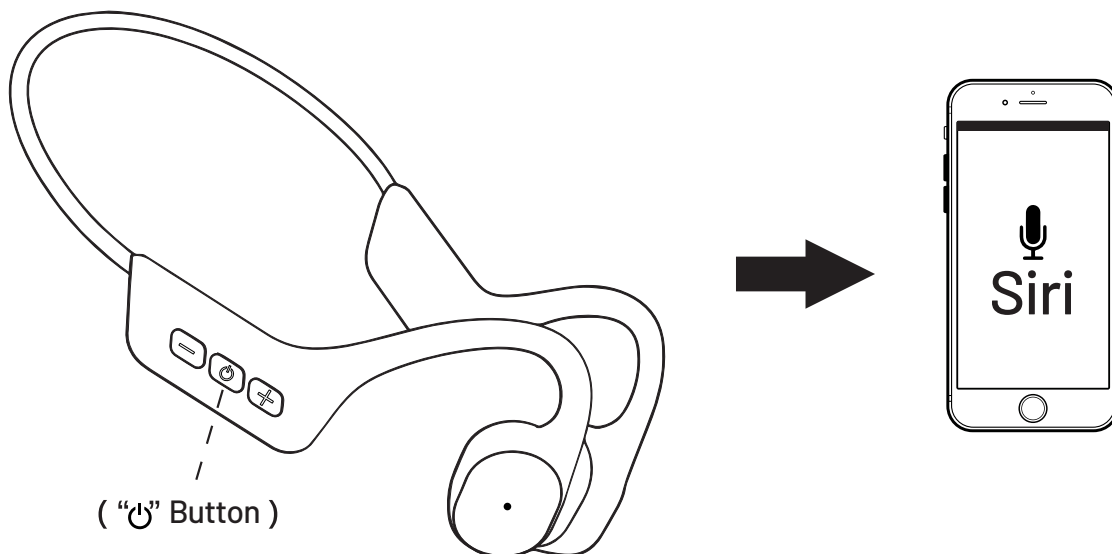


Music Playback

1. To pause music playback, press the power button once while music is playing.
2. To resume playback, press the power button again when music is paused.

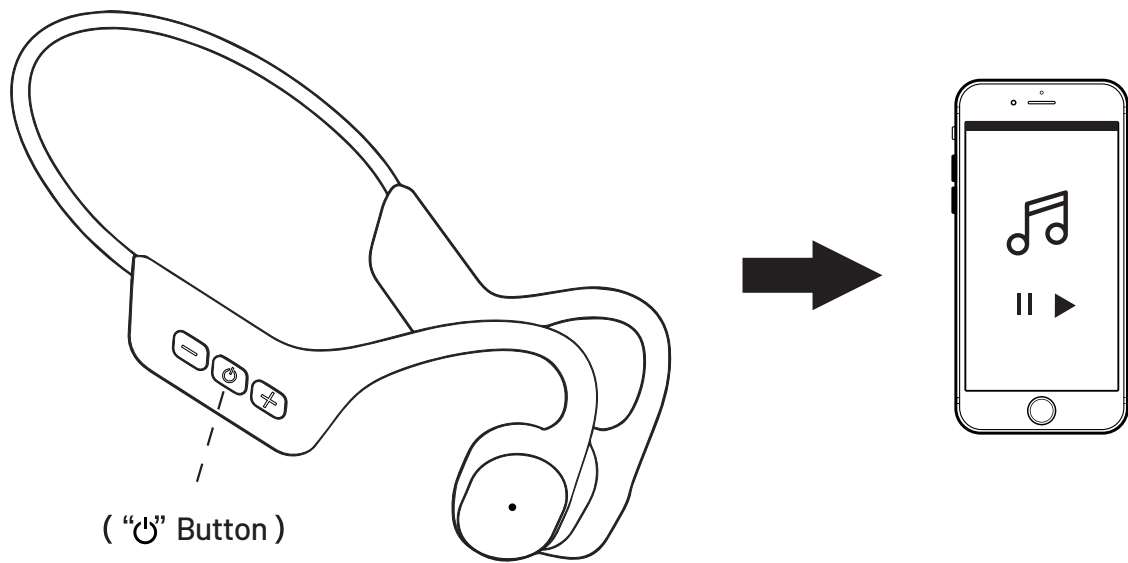

3. Volume Control: Tap the "+" button to gradually increase the volume, with each tap raising it by 6.7.% Tap 15 times to reach maximum volume from zero.

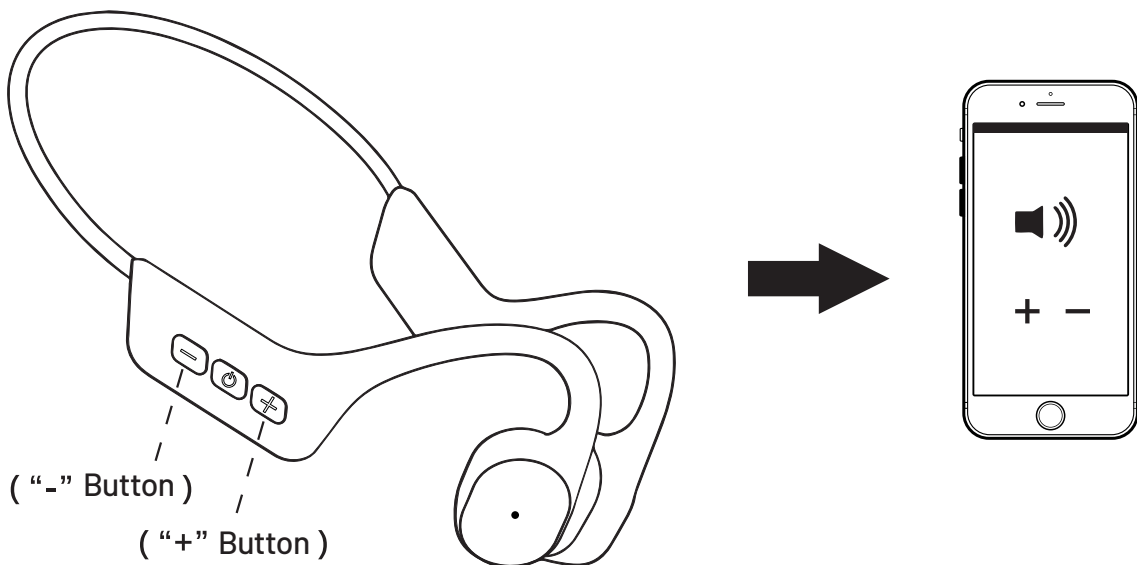

Automatic Reconnection

- A. Reconnection on Startup: The headset reconnects automatically to the last paired device upon powering on.
- B. Reconnection via Mobile Device: If disconnected, you can manually reconnect the headset through your mobile device.
- C. Reconnection after exiting Bluetooth connection range: When the headset goes out of Bluetooth range, it will automatically reconnect upon returning within range. If reconnection fails, press the switch button to initiate reconnection.

Switch to TF Card Mode

1. While powered on, press the power button twice in quick succession to switch to TF card mode. The voice prompt "SD card mode" will be heard. Once in TF card mode, the headset automatically plays music from the TF card.
2. If connected via Bluetooth, switching to TF card mode will disconnect Bluetooth from the mobile device. To switch back to Bluetooth mode, press the power button twice in quick succession. The voice prompt will emit the "Bluetooth mode" prompt. If previously paired, Bluetooth will reconnect automatically.
3. In TF card mode, the headset remembers the last playback position, resuming playback from that point.

Battery Level Voice Prompt

In Bluetooth and TF card modes, press the power button three times to hear the battery level announced via voice.

Switch Playback Mode

In TF Card Mode, the default playback setting is sequential playback from the beginning. To switch to random playback, press the power button four times. Pressing the power button four times again will switch back to playing the current song. Sequential playback allows for looping, providing continuous play in order.

Pausing Playback

In TF Card Mode when playback is paused, if the play button is not pressed within 45 minutes, the headset will automatically power off.

Battery and Charging

1. When the battery level drops below 10%, the red light will flash every 5 seconds, accompanied by a low battery alert sound every 10 minutes: "Low Battery".
2. To charge the device, connect it to a USB charging port. During charging, the red light remains on. Once fully charged, the blue light illuminates. When the

charging cable is disconnected, the light turns off. Charging time is approximately 2 hours.

3. When the charging cable is connected, the headset will automatically power off and reset to begin charging.

4. While the headset is on, press the power button three times to announce the current battery level.

Reset

To reset to factory settings, press and hold the power button for 10 seconds while the headset is off. The device will automatically power on after the reset.

Specifications

Battery Capacity	230mAh
Recharge Time	2H
Playtime	8H
Bluetooth	V5.3
Transmission Distance	10M
Driver	Ø18mm, Vibration Speaker
Memory	Built-in 32GB
Waterproof Level	IPX8
Waterproof Depth	Up to 2 Meters
Weight	38g

Cleaning and Maintenance

1. Do not submerge the earphones in seawater or saltwater, as the magnetic charging components are susceptible to corrosion.

2. If not used frequently, charge the device at least once a month.

3. Unauthorized disassembly of any parts is prohibited. If a defect is detected, discontinue use immediately and contact the professional service centers.

4. After exercising, promptly wipe off any moisture from the earphones, particularly

the charging magnets, to prevent corrosion from sweat and saltwater.

5. Keep the product away from fire, heat, freezing temperatures, and harsh chemicals. It is crucial to avoid harsh impacts, disassembly, or excessive pressure on the device.

6. Use a charging head with a 5V1A output or lower to ensure safe charging.

Warranty

Products that you buy directly from our **Porodo** website or shop come with a 24-month warranty.

When you buy **Porodo** products from any of our approved sellers, you only get a 12-month warranty. If you want to extend this warranty, go to our website at **<https://porodo.net/warranty>** and fill out the form with your information. Don't forget to upload a picture of the product too. After we've checked and accepted your request, we'll send you an email to confirm that your product's warranty has been extended.

For more info, please check:

<https://www.porodo.net/warranty>

Contact Us

If you have any questions about this Privacy Policy, please contact us at:

info@porodo.net

Website: **porodo.net**

Service Support: **support@porodo.net**

Instagram: **[porodo](https://www.instagram.com/porodo)**