
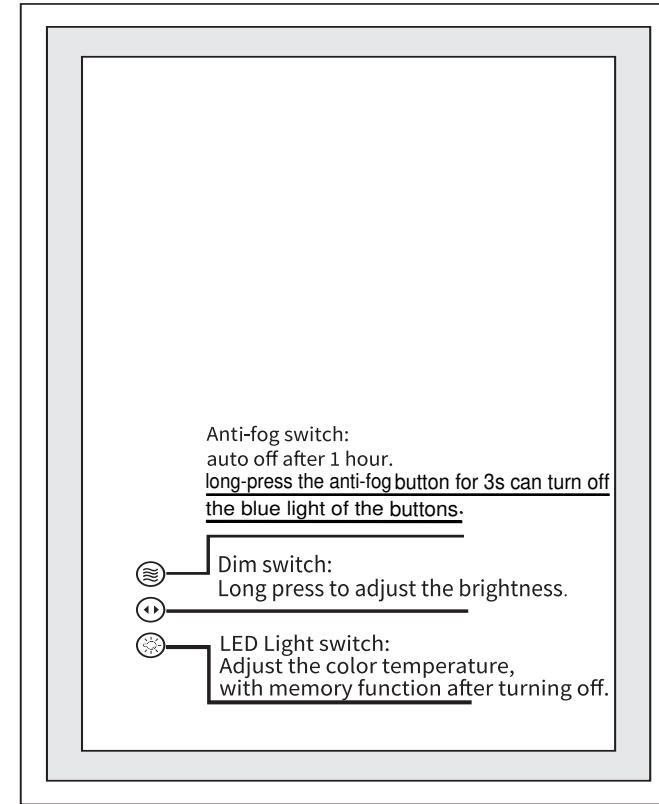
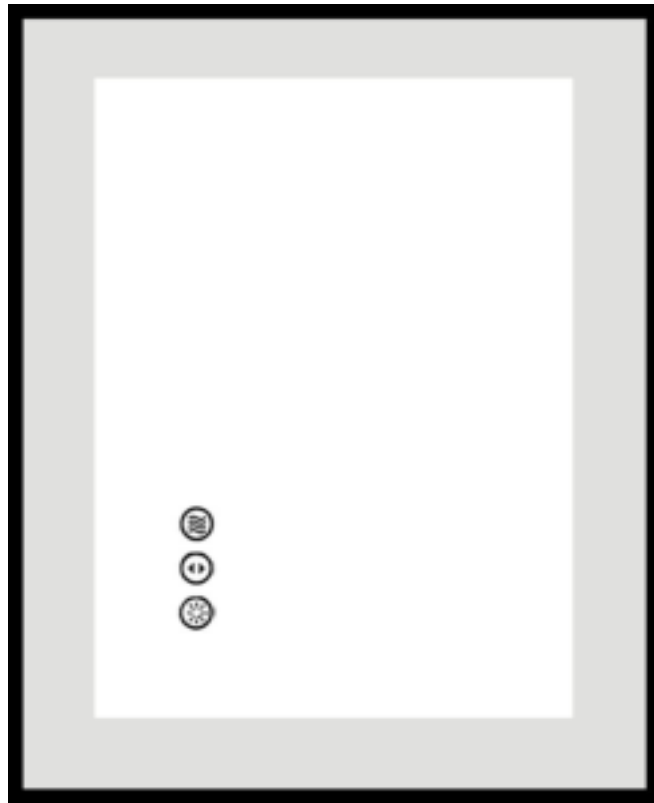
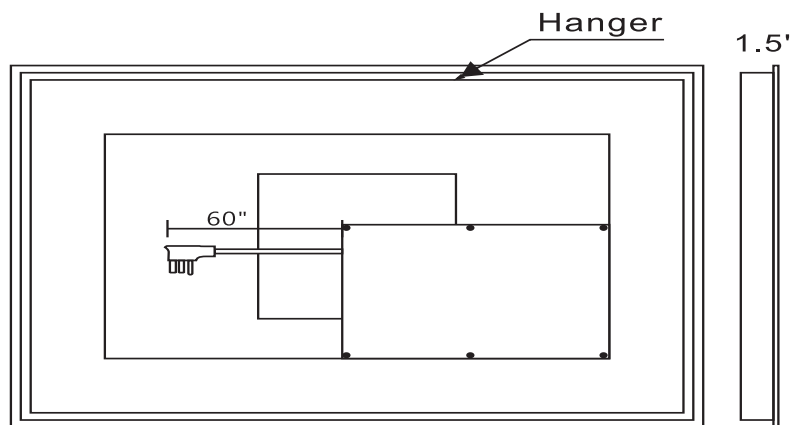



ECHOSLIFE LED Bathroom Mirror



User Manual











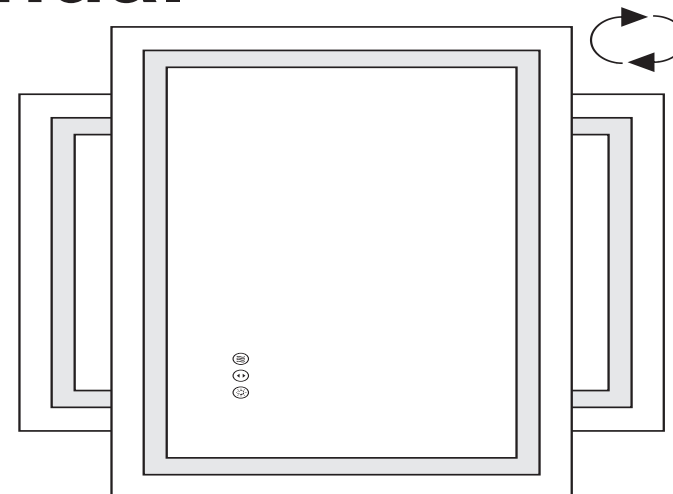
Accessories



Horizontal/ Vertical Installation

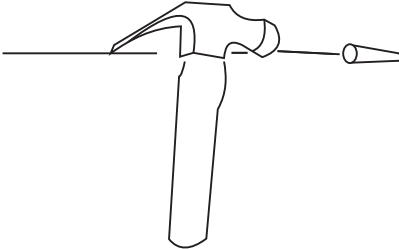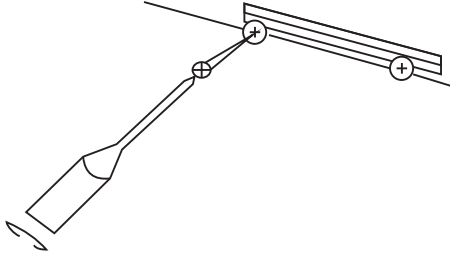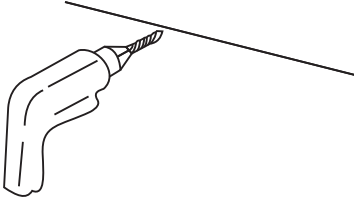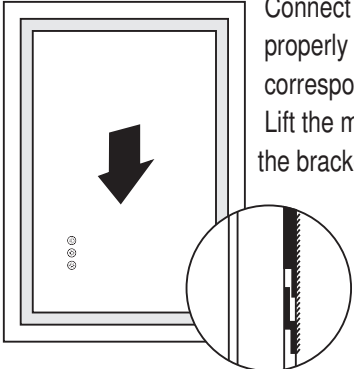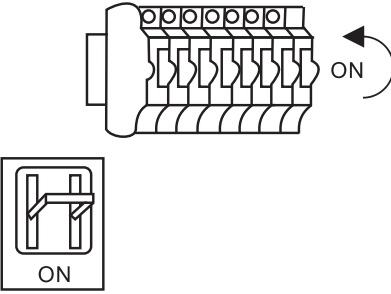Installation Instruction

Power Method 1 	Power Method 2 : Hardwire  Turn off the power before installation.	Step 3  Insert the nails.	Step 4  Mounted the brackets on the wall and then tightened the screws to ensure the bracket stayed sturdy. (Leave a 2-3 mm gap between the screwhead and wall)
Step 1  Measure the distance between the two ends; this mirror can be hung horizontally or vertically. Using a pencil and a level, mark the desired position on the wall.	Step 2  Drill the holes for nails and screws.	Step 5  Connect the wires properly to their corresponding color. Lift the mirror above the brackets.	Step 6  Turn on the power.



White(neutral) supply wire to the white(or ribbed) mirror wire
 Black (live) supply wire to the black(or smooth) mirror wire
 Green or bare copper supply wire to the green or bare copper mirror wire.

Warm Tips:

1. When the mirror arrives please first check that it is the same size as you purchased and that the mirror is in good condition, the accessories hang on the back of the mirror, if you don't find them please re-check the box.
2. Before installing, test the mirror's functions by plugging it into a power source. If you can't power on the mirror, please open the cover of the control box behind the mirror, check the power cord, and re-tighten it if it is loose. (Please disconnect the power supply when testing the power supply and cable)
3. If you have any questions, please do not hesitate to contact our team and we will respond immediately.

Specification:

Model Number	Size	Thickness	Touch Button	LED Strip Model	Color Temperature	Lumen	CRI	Power(W)	Input Voltage (V)	Weight(KG)
L001B7151	20"X28"	1.5"	3	2835 Colors 192LED	3000/4000/6000	4520	90	48	120V~50/60Hz	6.9
L001B8161	24"X32"	1.5"	3	2835 Colors 192LED	3000/4000/6000	5480	90	60	120V~50/60Hz	8.8
L001B9161	24"X36"	1.5"	3	2835 Colors 192LED	3000/4000/6000	5960	90	60	120V~50/60Hz	9.68
L001B10161	24"X40"	1.5"	3	2835 Colors 192LED	3000/4000/6000	6125	90	60	120V~50/60Hz	10.5
L001B9171	28"X36"	1.5"	3	2835 Colors 192LED	3000/4000/ 6000	6251	90	60	120V~50/60Hz	11
L001B9191	36"X36"	1.5"	3	2835 Colors 192LED	3000/4000/6000	8144	90	75	120V~50/60Hz	13.5
L001B10181	32"X40"	1.5"	3	2835 Colors 192LED	3000/4000/6000	8144	90	75	120V~50/60Hz	13.3
L001B12181	32"X48"	1.5"	3	2835 Colors 192LED	3000/4000/6000	9074	90	100	120V~50/60Hz	15.4
L001B12392	36"X48"	1.5"	3	2835 Colors 192LED	3000/4000/6000	9660	90	100	120V~50/60Hz	17.2
L001B15070	28"X60"	1.5"	3	2835 Colors 192LED	3000/4000/6000	9500	90	100	120V~50/60Hz	16.8
L001B18382	32"X72"	1.5"	3	2835 Colors 192LED	3000/4000/6000	12210	90	150	120V~50/60Hz	22.5
L001B13975	55"X30"	1.5"	3	2835 Colors 192LED	3000/4000/6000	9500	90	150	120V~50/60Hz	19
L001B15191	60"X36"	1.5"	3	2835 Colors 192LED	3000/4000/6000	10500	90	150	120V~50/60Hz	17.5
L001B18392	72"X36"	1.5"	3	2835 Colors 192LED	3000/4000/6000	12000	90	150	120V~50/60Hz	12.5
L001B21380	84"X32"	1.5"	3	2835 Colors 192LED	3000/4000/6000	14920	90	150	120V~50/60Hz	28
L001B24192	96"X36"	1.5"	3	2835 Colors 192LED	3000/4000/6000	18620	90	150	120V~50/60Hz	32
L001B9177	30"X36"	1.5"	3	2835 Colors 192LED	3000/4000/6000	6884	90	80	120V~50/60Hz	12.55
L001B9181	32"X36"	1.5"	3	2835 Colors 192LED	3000/4000/6000	7073	90	80	120V~50/60Hz	12.9
L001B9898	38"X38"	1.5"	3	2835 Colors 192LED	3000/4000/6000	8160	90	100	120V~50/60Hz	15.9
L001B10177	40"X30"	1.5"	3	2835 Colors 192LED	3000/4000/6000	7357	90	80	120V~50/60Hz	13.6
L001B10191	40"X36"	1.5"	3	2835 Colors 192LED	3000/4000/6000	8019	90	100	120V~50/60Hz	15.35
L001B12177	48"X30"	1.5"	3	2835 Colors 192LED	3000/4000/6000	8302	90	100	120V~50/60Hz	15.8
L001B120100	48"X40"	1.5"	3	2835 Colors 192LED	3000/4000/6000	9437	90	100	120V~50/60Hz	19.35
L001B14091	55"X36"	1.5"	3	2835 Colors 192LED	3000/4000/6000	9862	90	150	120V~50/60Hz	20.65
L001B15377	60"X30"	1.5"	3	2835 Colors 192LED	3000/4000/6000	9815	90	150	120V~50/60Hz	19.1
L001B151101	60"X40"	1.5"	3	2835 Colors 192LED	3000/4000/6000	10855	90	150	120V~50/60Hz	23.45
L001B183101	72"X40"	1.5"	3	2835 Colors 192LED	3000/4000/6000	12354	90	150	120V~50/60Hz	27.75
L001B214101	84"X40"	1.5"	3	2835 Colors 192LED	3000/4000/6000	13834	90	150	120V~50/60Hz	31.9
L001B22598	88"X38"	1.5"	3	2835 Colors 192LED	3000/4000/6000	14165	90	150	120V~50/60Hz	32.65