



RAZER AFTERLIGHT BUIB

MASTER GUIDE

Make your gamer room truly shine with Razer Aether™ lights. Powered by Razer Chroma™ RGB, customize and control them all from one convenient app to create the perfect setting for any scenario.

CONTENTS

1. WHAT'S INSIDE.....	3
2. WHAT'S NEEDED.....	3
3. LET'S GET YOU COVERED.....	4
4. TECHNICAL SPECIFICATIONS.....	4
5. GETTING STARTED.....	5
6. CUSTOMIZING THE LIGHT BULB.....	6
7. CONFIGURING YOUR RAZER AETHER LIGHT BULB VIA RAZER SYNAPSE.....	9
8. SAFETY AND MAINTENANCE	19
9. LEGALESE	20

1. WHAT'S INSIDE

- Razer Aether Light Bulb



- A. Light bulb Powered by Razer Chroma™ RGB
- B. E26 or E27 bulb fitting*

**Fitting may vary for specific regions.*

- Important Product Information Guide

2. WHAT'S NEEDED

PRODUCT REQUIREMENTS

- 2.4 GHz WiFi network (WPA / WPA2 encryption)
- WiFi-enabled PC / Laptop (Windows® 10 64-bit or higher) or iOS / Android device**

RAZER GAMER ROOM APP REQUIREMENTS

- iOS 16.4 / Android 9 Pie (or higher) device with Bluetooth connectivity**
- Internet connection for app installation

RAZER SYNAPSE REQUIREMENTS

- Windows® 10 64-bit (or higher)
- Internet connection for software installation

***Bluetooth connectivity is required for initial setup only.*

3. LET'S GET YOU COVERED



Register your product and score exclusive benefits

razerid.razer.com/warranty




4. TECHNICAL SPECIFICATIONS

- Form Factor: A19
- Fitting: E26/E27
- White color temperature: 2700 – 6500K
- RGB lighting: Razer Chroma RGB
- Luminous flux: 800 lm
- LED lifetime: 25,000 hours
- Rated power: 9W
- Input voltage: 100-240V-50/60 Hz
- Connection protocol: 802.11b/g/n 2.4 GHz
- Voice assistant: Amazon Alexa, Google Assistant
- Pairing: Bluetooth
- Works with Matter TM


5. GETTING STARTED

1. Install the Razer Aether Light Bulb.

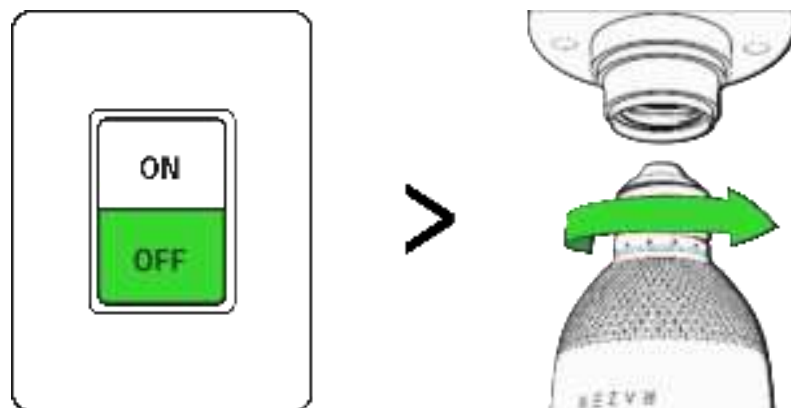

WARNING: Turn off the light switch before installing or removing the light bulb. Install the light bulb in well-ventilated fixtures and avoid using it with dimmer switches.

2. Turn on the light switch.

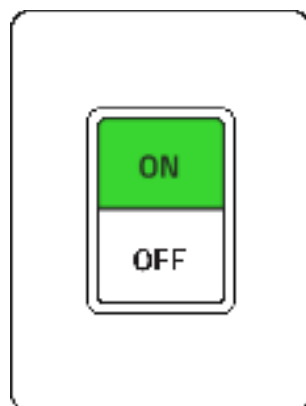

6. CUSTOMIZING THE LIGHT BULB

A. VIA MOBILE DEVICE USING THE RAZER GAMER ROOM APP (REQUIRED)

1. Download the Razer Gamer Room app on your mobile device.




Razer Gamer Room



RZR.TO/GAMER-ROOM-APP



2. Turn on the light switch.

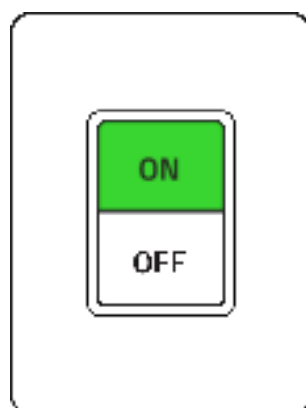

3. Launch the app, follow the onscreen instructions and scan the QR code on the light bulb.



For easier accessibility, you can scan the light bulb's QR code on the product packaging instead. Please make sure that your mobile device is on your preferred 2.4 GHz network.

You can now customize the Razer Aether Light Bulb using the Razer Gamer Room app.


B. VIA PC / LAPTOP USING THE RAZER SYNAPSE APP

i Before proceeding, make sure the light bulb is already set up on your network (via the Razer Gamer Room app) and your PC is on the same network.

1. Go to razer.com/synapse to download and launch Razer Synapse. For existing users, update Razer Synapse to its latest version.

i Registering for a Razer ID account is recommended but optional. You may continue as a guest; however, you won't be able to store any of your settings on the cloud.

2. Turn on the light switch.

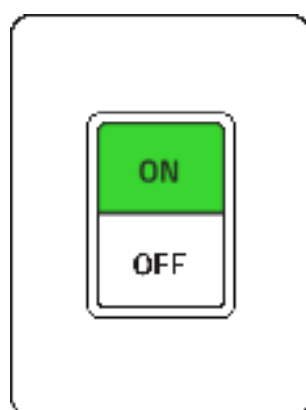

2. On Razer Synapse, click **Add WiFi Device**, choose **Gamer Room Devices**, select your device, and follow the onscreen instructions.



3. Update when prompted, and wait for Razer Synapse to set up the Razer Aether Light Bulb. The Razer Synapse Dashboard will now show the Razer Aether Light Bulb on the Devices list.



You can now customize the Razer Aether Light Bulb using Razer Synapse.

UNDERSTANDING PAIRING MODE

Reactivating pairing mode

Pairing mode is required when setting up the light bulb from the Razer Gamer Room app. It activates when you turn on the light switch and deactivates after 5 minutes if the light bulb remains unpaired. To reactivate pairing mode, turn off and on the light switch.

Resetting to factory settings

Once connected, a reset is required to pair the light bulb to a new device. To reset, turn on and off the light switch four (4) times, with 1-second intervals, then turn it on again. The light bulb will briefly cycle through colors before turning white, indicating the reset and activation of pairing mode.

7. CONFIGURING YOUR RAZER AETHER LIGHT BULB VIA RAZER SYNAPSE


i Internet connection is required for installation, updates, and cloud-based features. Registering for a Razer ID account is recommended but optional. All listed features are subject to change based on the current software version, the connected device(s), and supported apps and software.

SYNAPSE TAB

The Synapse tab is your default tab when you first launch Razer Synapse. This tab allows you to navigate the Dashboard subtab.


Dashboard

The Dashboard subtab is an overview of your Razer Synapse, where you can access all your Razer devices, hardware recommendations, modules, and online services.

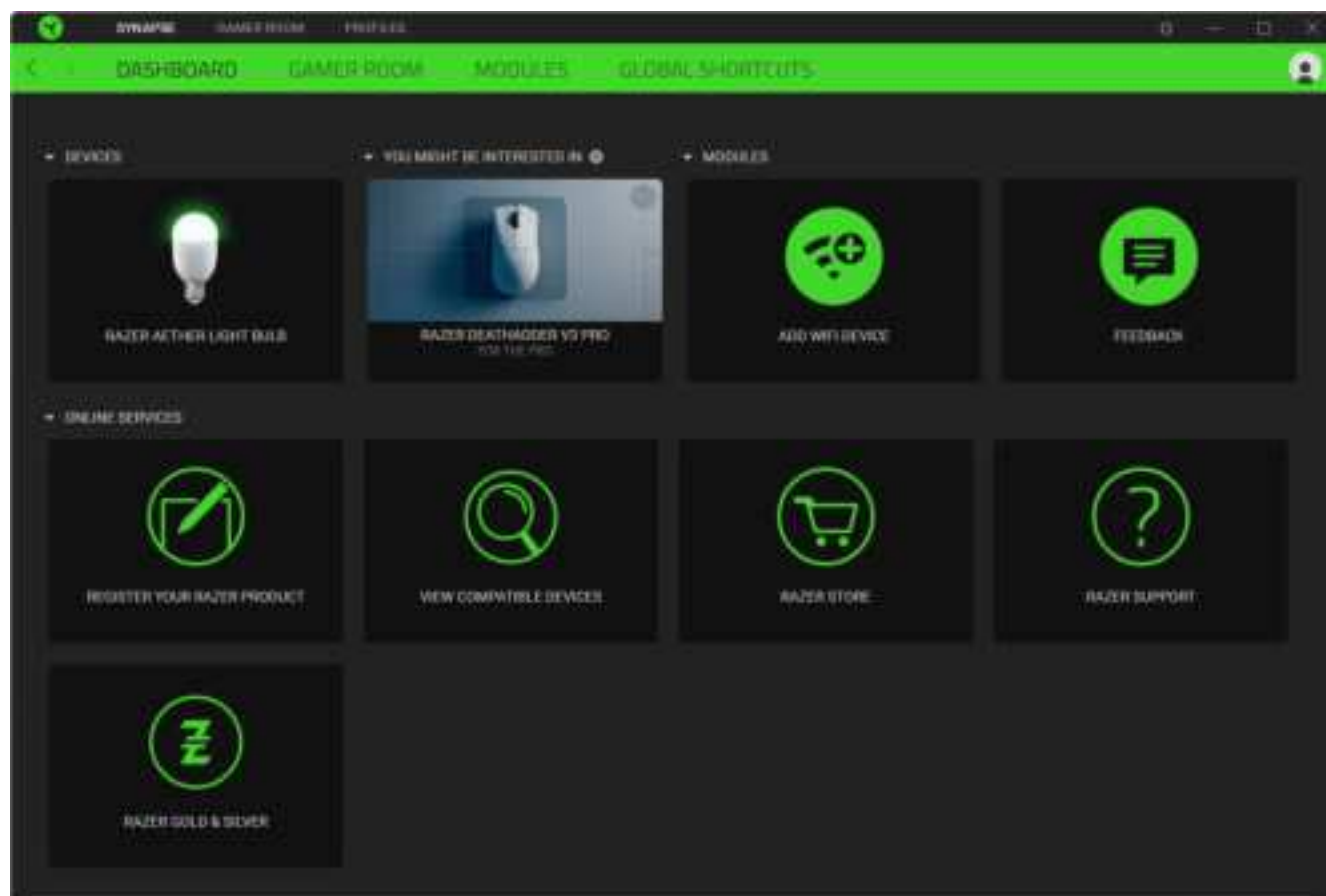


Gamer Room

Use the Gamer Room subtab to manage which devices are directly controlled by Razer Synapse and the Razer Gamer Room app. You can power on or off any Razer Gamer Room device using the Power on/off button (⏻) or switch app control by clicking on any device and toggling Synapse Override.

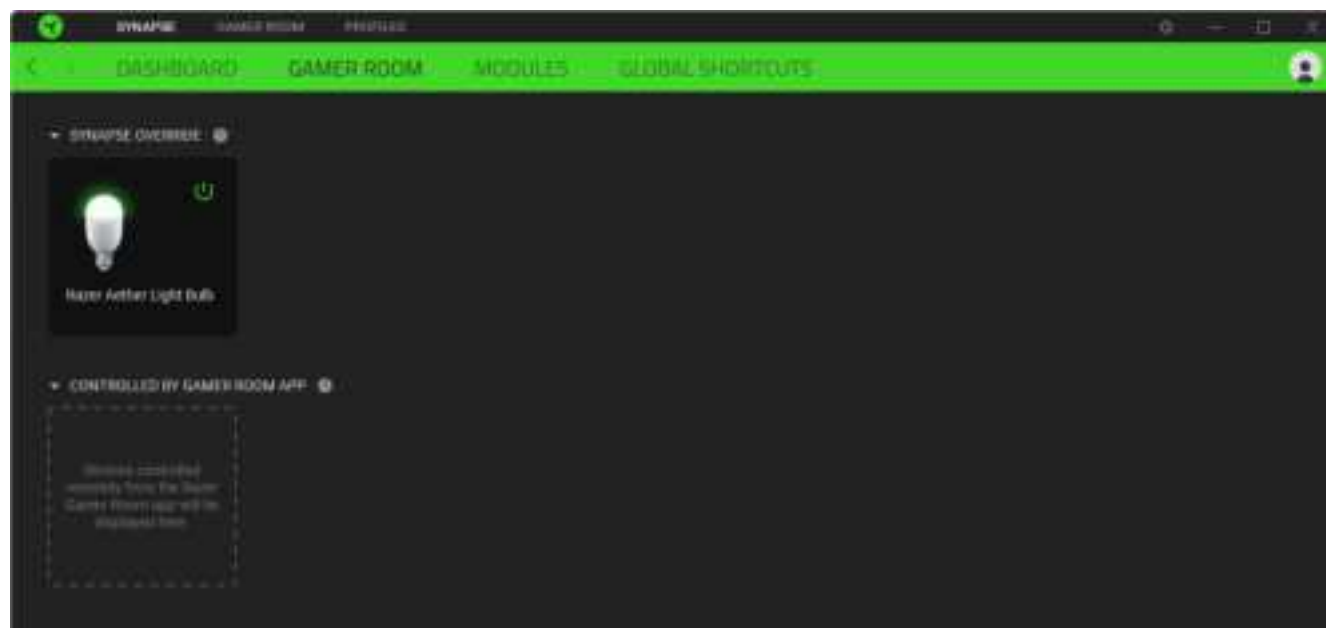


Modules

The Modules subtab displays all installed and available modules for installation.

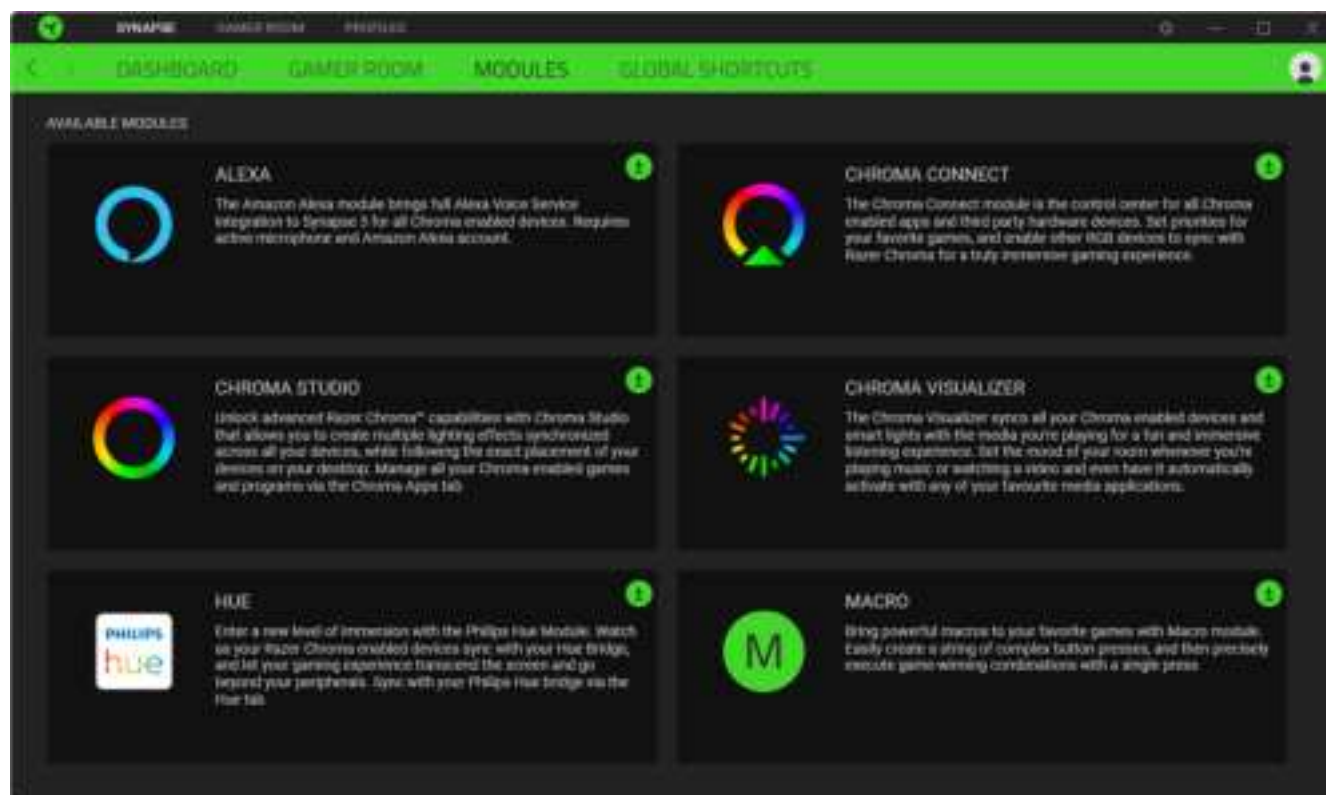

Global Shortcuts

Bind operations or Razer Synapse functions to custom key combinations from Razer Synapse-enabled device inputs that apply across all device profiles. [Learn more about Profiles](#)

 *Only Razer Synapse-enabled device inputs will be recognized.*




GAMER ROOM TAB

The Gamer Room tab is the main tab for your Razer Aether Light Bulb. From here, you can customize your device's settings to unleash its full potential. Changes made under this tab are automatically saved to your system and cloud storage.

Lighting

The Lighting subtab allows you to manage how Razer Synapse will take control of your device's lighting, adjust the light bulb's brightness and customize its lighting effect.

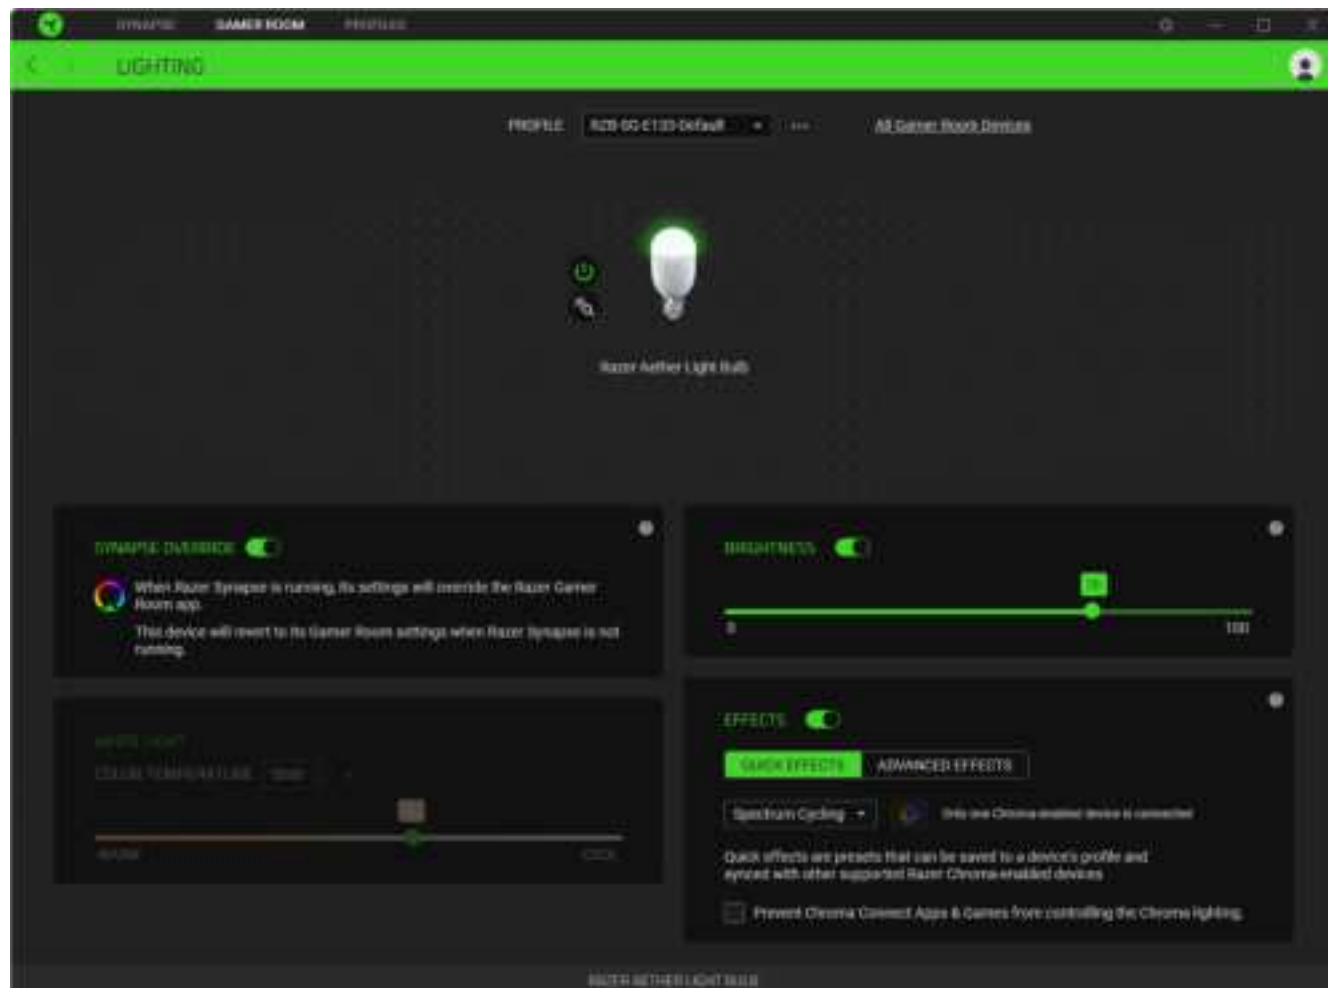

Profile

A Profile is a data storage for keeping all your Razer peripheral's settings. By default, the profile name is based on your system's name. To add, import, rename, duplicate, export, reset or delete a profile, press the Miscellaneous button { ... }.

All Gamer Room Devices

Redirects you to the Synapse > Gamer Room subtab, where you can manage which devices are directly controlled by Razer Synapse and the Razer Gamer Room app.

Power on/off a device

You can turn your Razer device on or off by clicking the Power on/off button (⏻).

Identifying a device

Click the Identify button (🔍) to show where your Razer device is in your physical setup.

Renaming a device

Assign your preferred name to your Razer device by clicking on the device name with the Rename cursor (✎).

Removing a device

Remove a Razer device from your setup by hovering the cursor on its image and clicking the Remove button (✖).

❗ *Once removed, you must add the device again on Razer Synapse.*

Synapse Override

Enable this setting to automatically take over and override Razer Gamer Room app settings whenever Razer Synapse is running.

Brightness

Adjust the luminance of your Razer device using the brightness slider, or turn it off entirely by toggling the brightness option.



White light





Adjust how warm or cool the light bulb's lighting is.


❗ *This setting can only be adjusted when Effects is toggled off.*

Quick Effects

Several effects can be selected and applied to the light bulb, as listed here:


	Name	Description	How to set up
	Ambient awareness	The light bulb will reflect the average color on the selected screen region	Select or customize a screen region
	Audio meter	The light bulb will light up according to the audio level with a default spectrum of colors	Select a Color Boost level

	Breathing	The lighting will fade in and out of the selected color(s)	Select up to 2 colors or randomize colors
	Spectrum cycling	The lighting will cycle between 16.8 million colors indefinitely	No further customization required
	Starlight	The lighting will fade in and out using a random time and duration	Select up to 2 colors or randomize colors and select a duration
	Static	The light bulb will remain lit in the selected color	Select a color

If you have other supported Razer Chroma-enabled devices, you can synchronize their quick effects with your Razer device by clicking the Chroma Sync button (). You can also exclude this device from Chroma Connect Apps & Games by enabling the option provided.

 *Only devices that support the selected lighting effect will synchronize.*

Advanced Effects


The Advanced Effects option allows you to choose a Chroma Effect you want to use on your Razer Chroma-enabled device. To start making your own Chroma Effect, press the Chroma Studio button ().

PROFILES TAB

The Profiles tab is a convenient way to manage all your profiles and link them to your games and applications.

Devices


View which games are linked to each device's profiles or which Chroma Effect is linked to specific games using the Devices subtab.

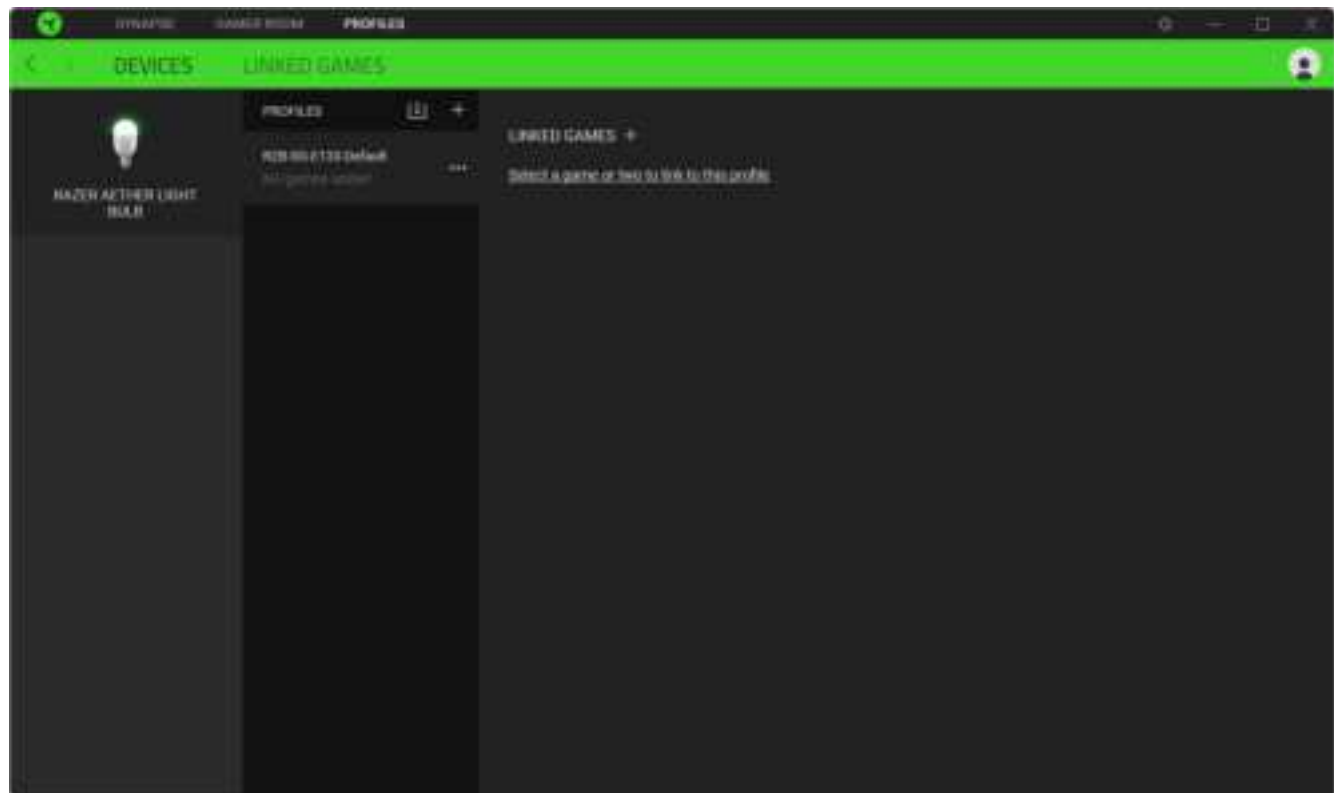

You can import Profiles from your computer or the cloud through the import button (📁) or create new profiles within the selected device using the add button (+). To rename, duplicate, export, or delete a profile, simply press the Miscellaneous button (⋮). Each profile can be set to activate when you run an application using the Linked Games option.

Linked Games


The Linked Games subtab allows you to add games, view devices linked to games, or search for added games. You can also sort games based on alphabetical order, last played, or most played. Added games will still be listed here, even if they are not linked to a Razer device.

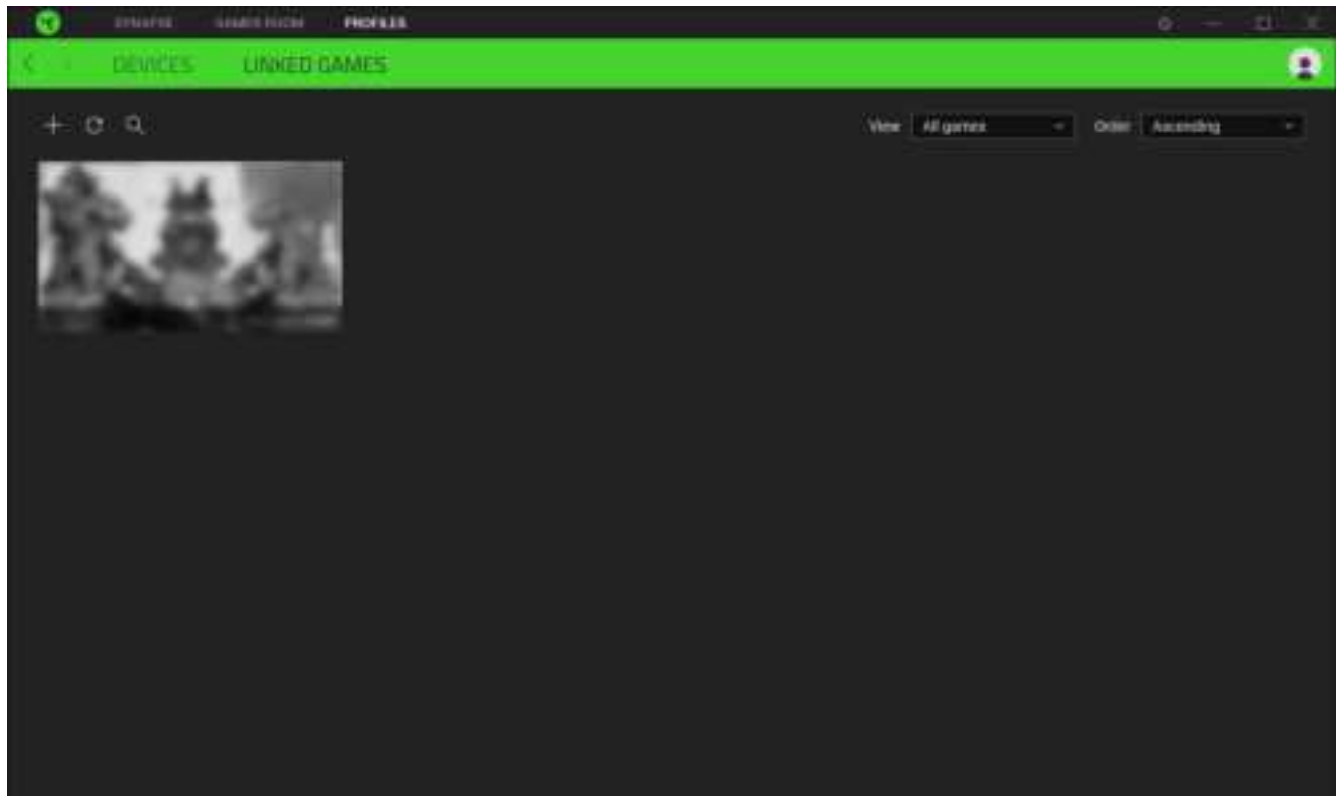

To link games to connected Razer devices or Chroma Effects, simply click on any game from the list, and then click **Select a device and its profile to launch automatically during gameplay** to select the Razer device or Chroma Effect it will link with. Once connected, you may click the Miscellaneous button { ... } of the corresponding Chroma Effect or device to select a specific Chroma Effect or profile.

SETTINGS WINDOW

The Settings window, accessible by clicking the (⚙️) button on Razer Synapse, enables you to configure the startup behavior and display language of Razer Synapse, control the recommendations you see on the Dashboard, check the firmware version and master guide of each Razer device, or perform a factory reset on any connected Razer device.

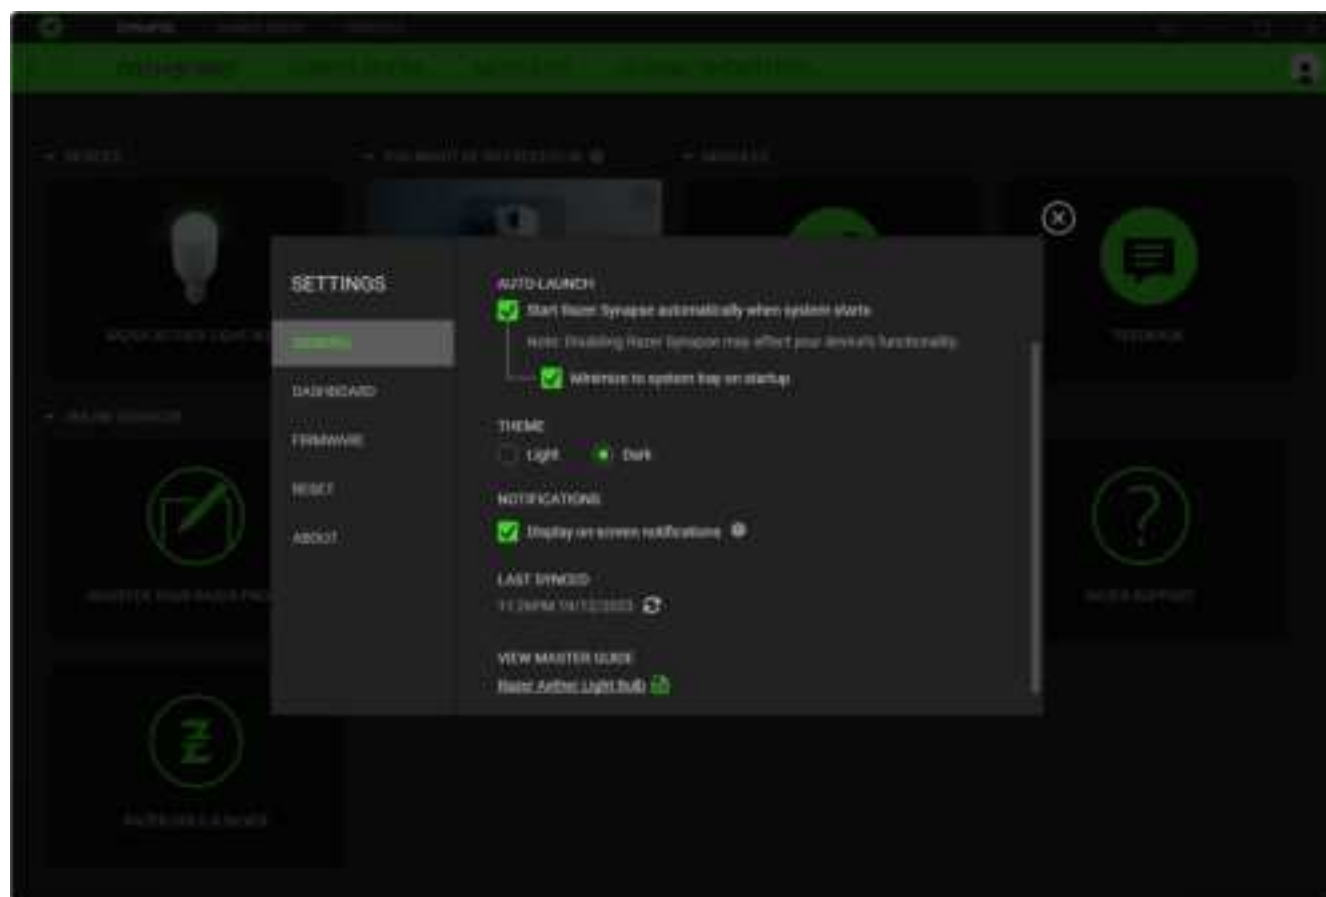

General tab

The General tab lets you change the software's display language, startup behavior, theme, and on-screen notifications. You may also manually sync your profiles to the cloud (☁️) or view the master guide of all connected Razer devices and installed modules.

Dashboard tab

Use the Dashboard tab to customize which Razer device recommendations based on your setup, and the games you play will appear on the Dashboard.

Firmware tab

Access the Firmware tab to view the current firmware version of your Razer device(s), and/or visit the Software and Firmware Update page to see whether a firmware update is available for your device(s).

Reset tab

The Reset tab allows you to perform a factory reset on all connected Razer devices with on-board memory and/or reset Razer Synapse tutorials to acquaint yourself again with Razer Synapse's new features on its next launch.



All profiles stored on the selected device's on-board memory will be erased when you reset a Razer device.

About tab

The About tab displays brief software information and copyright statement, and provides relevant links for its terms of use. You may also use this tab to check for software updates, or as quick access to Razer's social communities.

8. SAFETY AND MAINTENANCE

SAFETY GUIDELINES

To achieve maximum safety while using the Razer Aether Light Bulb, we suggest that you adopt the following guidelines:

Should you have trouble operating the light bulb properly and troubleshooting does not work, uninstall and contact the Razer hotline or go to support.razer.com for support. Do not attempt to service or fix the light bulb yourself at any time.

Do not take apart the light bulb, and do not attempt to operate it under abnormal current loads. Doing so will void your warranty.

Don't use the light bulb with dimmer switches to avoid damaging it.

Turn off the light bulb using the light switch or in-app when not in use.

Keep the light bulb away from liquid, humidity, or moisture. Operate it within the specific temperature range of 0°C (32°F) to 40°C (104°F). Should the temperature exceed this range, uninstall the light bulb to let the temperature stabilize to an optimal level.

MAINTENANCE AND USE

The Razer Aether Light Bulb requires minimum maintenance to keep it in optimum condition. Once a month, we recommend you turn off the light switch and clean it using a soft cloth to prevent dirt buildup. Do not use soap or harsh cleaning agents.

9. LEGALESE

COPYRIGHT AND INTELLECTUAL PROPERTY INFORMATION

©2024 Razer Inc. All rights reserved. Razer, the triple-headed snake logo, Razer logo, "For Gamers. By Gamers." and "Razer Chroma" are trademarks or registered trademarks of Razer Inc. and/or affiliated companies in the United States and other countries. Actual product may differ from pictures. All other trademarks are the property of their respective owners. Warranty not valid outside of product's intended region.

Android, Google, Google Logo, Google Play, and the Google Play logo are trademarks of Google LLC.

Apple, the Apple logo, and iPhone are trademarks of Apple Inc., registered in the U.S. and other countries. App Store is a service mark of Apple Inc. iOS is a trademark or registered trademark of Cisco in the U.S. and other countries and is used under license.

The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc., and any use of such marks by Razer is under license.

Windows and the Windows logo are trademarks of the Microsoft group of companies.

Razer Inc. ("Razer") may have copyright, trademarks, trade secrets, patents, patent applications, or other intellectual property rights (whether registered or unregistered) concerning the product in this guide. Furnishing of this guide does not give you a license to any such copyright, trademark, patent or other intellectual property right. The Razer Aether Light Bulb (the "Product") may differ from pictures whether on packaging or otherwise. Razer assumes no responsibility for such differences or for any errors that may appear. Information contained herein is subject to change without notice.

LIMITED PRODUCT WARRANTY

For the latest and current terms of the Limited Product Warranty, please visit [razer.com/warranty](https://www.razer.com/warranty).

LIMITATION OF LIABILITY

Razer shall in no event be liable for any lost profits, loss of information or data, special, incidental, indirect, punitive or consequential or incidental damages, arising in any way out of distribution of, sale of, resale of, use of, or inability to use the Product. In no event shall Razer's liability exceed the retail purchase price of the Product.

GENERAL

These terms shall be governed by and construed under the laws of the jurisdiction in which the Product was purchased. If any term herein is held to be invalid or unenforceable, then such term (in so far as it is invalid or unenforceable) shall be given no effect and deemed to be excluded without invalidating any of the remaining terms. Razer reserves the right to amend any term at any time without notice.