


1000TVL Intensifier® Series Dome Camera with Junction Box Wall/Ceiling Mount, Dual voltage



200 New Highway, Amityville, NY 11701
800-645-5516 / www.specotech.com

HTINT59K1 – 2.8~12mm varifocal lens, dark gray housing

DIMENSIONS

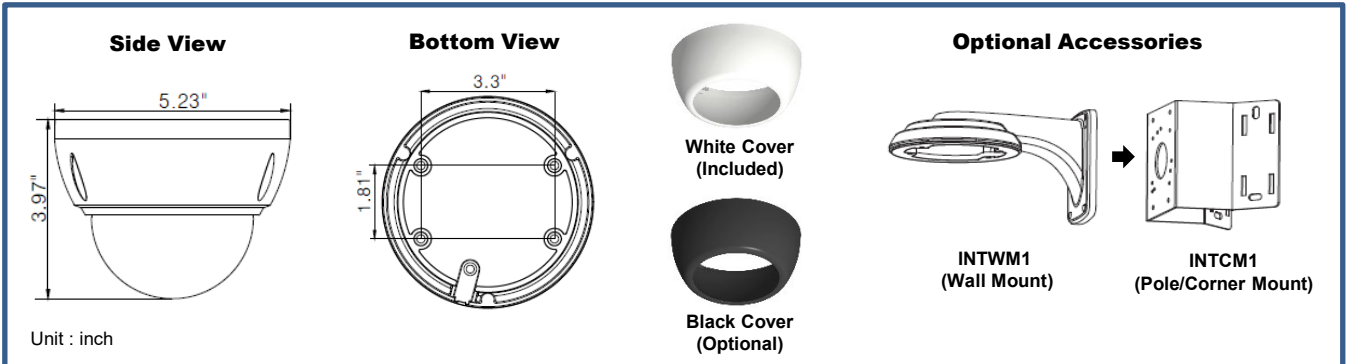

FEATURES

- 1/3" 1.3MP Sensor
- 1000 TV lines highest resolution in analog
- True WDR operation
- Superior low-light performance
- Amplify existing light with no distance limitation
- Presets: Outdoor, Low Light, Hallway, Lobby, Elevator, Indoor
- Built-in heater and anti-fog glass reduces condensation
- 3-axis for wall and ceiling mounting
- Chameleon Cover™: snaps on and can be painted to match any décor!*
- Full OSD operation through on-board control
- Signal distance up to 1600 feet*
- Vandal / tamper resistant
- IP67 compliant, weather resistant
- 12VDC & 24VAC dual voltage operation
- 5 year warranty

SPECIFICATIONS


Image Sensor.....	1/3" 1.3MP Sensor
Minimum Illumination.....	0.0001 lux (Sens-up X32)
Effective Pixels.....	1305 (H) x 1049 (V)
Total Pixels.....	1312 (H) x 1069 (V)
Scanning System.....	Progressive
S/N Ratio.....	More than 50dB
Video Output.....	1.0Vp-p / 75 Ohms
Electronic Shutter.....	Auto / Manual (1/60 – 1/60,000 sec.)
WDR.....	On (Low / Middle / High) / Off
Day / Night.....	Auto / Color / BW
Test Monitor Output.....	CVBS (Connector on Board)
Power.....	12VDC / 24VAC
Power Consumption.....	600mA max. (DC), 450mA max. (AC)
Operating Temperature.....	-4° F – 140° F
Unit Dimensions.....	3.97" (H) x 5.23" (Dia.)
Unit Weight.....	1.4 lbs (camera), 0.7 lbs (junction box)
Certifications.....	FCC, RoHS

OSD MENU TREE


PRESET MODE

• OUTDOOR • LOW LIGHT • HALLWAY • LOBBY • ELEVATOR • INDOOR

MAIN SETUP

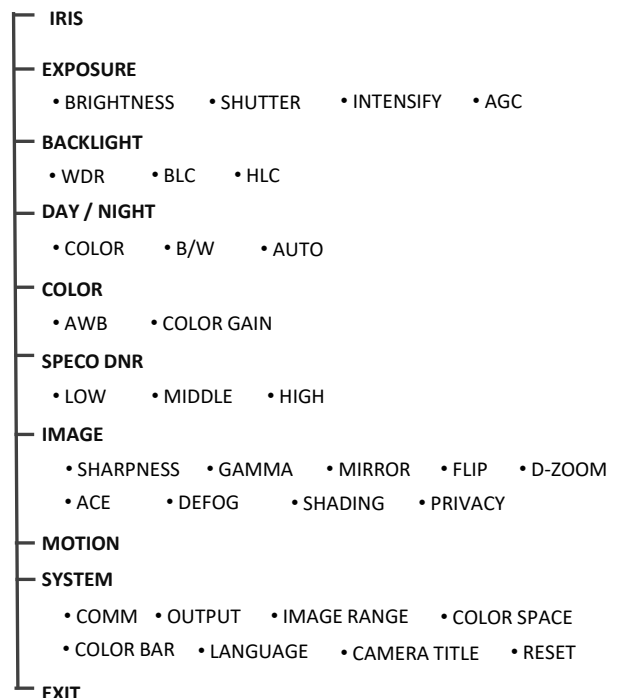

OSD CONTROL

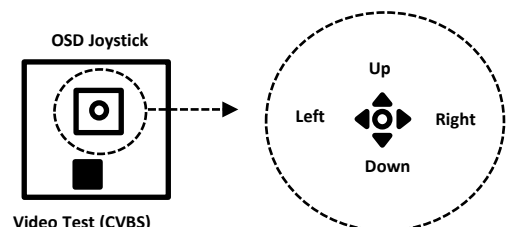

1000TVL Intensifier® Series Dome Camera with Junction Box

Wall/Ceiling Mount, Dual voltage



200 New Highway, Amityville, NY 11701
800-645-5516 / www.specotech.com

HTINT59K1 – 2.8~12mm varifocal lens, dark gray housing

OSD MENU Details

IRIS : 'ALC' as a default value

EXPOSURE : adjusts exposure settings.

BRIGHTNESS : Adjusts image brightness. (0~20)

SHUTTER : Outdoor / Indoor / Deblur

INTENSIFY : Sets the desired multiple of the digital exposure length.

AGC(Auto Gain Control): Adjusts the AGC level. (0~10)

BACKLIGHT : Adjusts backlight options.

WDR : WDR illuminates darker areas of an image while retaining the same light level for brighter areas to even out the overall brightness of images with high contrast between bright and dark area
- Adjusts the WDR Weight (LOW/MIDDLE/HIGH)

BLC : Produces a clearer image of an object darkened by strong backlighting.

- H-POS : Adjusts the horizontal position(0~20)

- V-POS : Adjusts the Vertical position(0~20)

- H-SIZE : Adjusts the horizontal block size (0~20)

- V-SIZE : Adjusts the vertical block size (0~20)

HLC : Uses to contain extremely bright areas such as from car headlight, the light can be masked out much of the on-screen details.

DAY / NIGHT : Adjust Day / Night options.

COLOR : Always Color mode, Default value for these cameras

B/W : Always B/W mode.

- ANTI-SAT. : Adjusts the Anti Saturation level (0~20)

AUTO : Day / Night is switching automatically by AGC level.

- ANTI-SAT. : Adjusts the Anti Saturation level (0~20)

- AGC THRES : Adjusts AGC THRES (0~20)

- AGC MARGIN : Adjusts AGC margin (0~20)

- DELAY : Adjusts the changing delay time (LOW/MIDDLE/HIGH)

COLOR : Adjusts white balancing options.

AWB : it goes to optimized color level automatically.

COLOR GAIN : Sets the desired Color Gain value (0~20)

SPECO DNR : Uses to reduce the background noise in a low luminance environment with 2D + 3D filtering system.

IMAGE : Adjusts various image options.

SHARPNESS : Adjusts sharpness level. Increasing this value, the picture outline becomes stronger and clear. (0~10)

GAMMA : Sets the desired Gamma value. (0.45 ~ 0.75)

MIRROR : Change the video direction horizontally.

FLIP : Change the video direction perpendicularly.

D-ZOOM : Digital zoom up to x8 will be activated.

ACE (D-WDR) : Uses a digital wide dynamic range to balance dark and over saturated areas within the image.

DEFOG : Activated this mode when the video or the weather is foggy.

SHADING : Sets the Lens Shading Compensation value. (ON/OFF)

PRIVACY : Used to hide regions of the image.

MOTION : Adjust motion detection settings.

DET WINDOW

DET TONE

MDRECT FILL

SENSITIVITY : Sets the desired of "Motion" (0~20)

MOTION OSD

TEXT ALARM

SIGNAL OUT

SYSTEM : Adjusts various camera system options.

COM.

- CAM ID : Sets the camera ID for the RS-485 (0~255)

- BAUD RATE : Sets the baud rate for the RS-485 (2400~115200).

OUTPUT

VIEW ANGLE

WIDE 4 : 3 / WIDE 16 : 9

FREQ 60HZ

ANALOG MODE CVBS

CONFIRM YES

IMAGE RANGE

COLOR SPACE

COLOR BAR : Manufacturer's option

LANGUAGE : Sets the desired OSD language

CAM TITLE

RESET: Press with long to reset all settings to factory defaults.



LIMITED WARRANTY - VIDEO PRODUCTS

THIS WARRANTY IS VALID ONLY ON PRODUCTS PURCHASED AND USED IN THE UNITED STATES OF AMERICA AND CANADA. THIS WARRANTY APPLIES ONLY TO THE ORIGINAL USER.

SUBJECT TO CONDITIONS AND EXCLUSIONS FOUND BELOW, THIS PRODUCT IS WARRANTED AGAINST MANUFACTURING DEFECTS IN MATERIAL AND WORKMANSHIP FOR THE FOLLOWING PERIOD FOR PARTS AND LABOR:

SPECO TECHNOLOGIES CAMERAS.....	5 YEARS	DVRS.....	5 YEARS
SPECO TECHNOLOGIES IP CAMERAS.....	5 YEARS	NVRS.....	5 YEARS
SPECO PTZ.....	1 YEAR	BALANCE OF	
SPECO TECHNOLOGIES MONITORS.....	1 YEAR	SPECO TECHNOLOGIES LINE.....	1 YEAR
IR LEDS.....	90 DAYS		

SPECO TECHNOLOGIES WILL REPAIR OR REPLACE (AT OUR DISCRETION) ANY PARTS FOUND TO BE DEFECTIVE FOR THE WARRANTY PERIOD SPECIFIED. WE WILL PROVIDE A REPLACEMENT FOR ANY DEFECTIVE PART.

CONDITIONS

1. YOU MUST OBTAIN A RETURN AUTHORIZATION (RA) NUMBER FOR ANY MERCHANDISE BEING RETURNED TO SPECO TECHNOLOGIES, WHETHER FOR RETURN/EXCHANGE OR REPAIR, WHETHER IN OR OUT OF WARRANTY.
2. THIS WARRANTY WILL BE HONORED ONLY UPON PRESENTATION OF THE ORIGINAL DATED BILL OF SALE OR SALES SLIP.
3. TRANSPORTATION OF THE PRODUCT TO OUR SERVICE DEPARTMENT IS THE RESPONSIBILITY OF THE USER. REPAIRED OR REPLACED PRODUCT WILL BE RETURNED PREPAID DURING THE WARRANTY PERIOD.
4. SPECO TECHNOLOGIES DOES NOT AUTHORIZE ANY INTERNET OR MAIL ORDER PRODUCT SALES. IF A SPECO TECHNOLOGIES PRODUCT IS PURCHASED FROM AN UNAUTHORIZED DISTRIBUTOR OR OTHER SOURCE, INCLUDING RETAILERS, MAIL ORDER SELLERS AND ONLINE SELLERS, IT WILL NOT BE HONORED OR SERVED UNDER THE EXISTING SPECO TECHNOLOGIES WARRANTY POLICY. ANY SPECO TECHNOLOGIES PRODUCT PURCHASED FROM THESE ONLINE MERCHANTS WILL VOID THE APPLICABLE WARRANTY AND IS INELIGIBLE FOR TECHNICAL SUPPORT. IF YOU HAVE QUESTIONS ABOUT A RESELLER, PLEASE CONTACT SPECO TECHNOLOGIES AT 1-800-645-5516 FOR A LIST OF UNAUTHORIZED DEALERS, VISIT: www.specotech.com/unauthorized.

EXCLUSIONS

1. THIS WARRANTY SHALL NOT COVER ADJUSTMENT OF CUSTOMER OPERATED CONTROLS AS EXPLAINED IN THE APPROPRIATE MODEL'S INSTRUCTION MANUAL OR PRODUCTS WHICH HAVE BEEN ALTERED, ABUSED, OR HAVE MISSING OR ALTERED SERIAL NUMBERS.
 2. THIS WARRANTY SHALL NOT APPLY TO UNCRATING, SETUP, INSTALLATION, OR THE REMOVAL AND REINSTALLATION OF PRODUCTS AFTER REPAIR.
 3. THIS WARRANTY SHALL NOT APPLY TO REPAIRS OR REPLACEMENTS NECESSITATED BY ANY CAUSE BEYOND THE RESULT OF MANUFACTURE INCLUDING, BUT NOT LIMITED TO, ANY MALFUNCTION, DEFECTS OR FAILURE CAUSED BY OR RESULTING FROM UNAUTHORIZED SERVICE OR PARTS, IMPROPER MAINTENANCE, MODIFICATION OR REPAIR BY THE USER, ABUSE, MISUSE, NEGLIGENCE, ACCIDENT, FIRE, FLOOD, OR OTHER ACTS OF NATURE, INCORRECT LINE VOLTAGE, DAMAGE OR IMAGE BURNS TO TELEVISION PICTURE TUBES CAUSED BY OR ATTRIBUTABLE TO THE USE OF ANY ACCESSORY, ELECTRONICS GAME OR DEVICE, OR DAMAGE CAUSED TO IMAGE PICKUP DEVICES BY EXCESSIVE LIGHT.
- THE FOREGOING IS IN LIEU OF ALL OTHER EXPRESSED WARRANTIES AND WE DO NOT AUTHORIZE ANY PARTY TO ASSUME FOR US ANY OTHER OBLIGATION OR LIABILITY. IN NO EVENT SHALL WE BE LIABLE FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING FROM THE USE OF THIS PRODUCT, OR FOR ANY DELAY IN THE USE OF THIS PRODUCT DUE TO CAUSES BEYOND OUR CONTROL. SOME STATES DO NOT ALLOW LIMITATIONS OF HOW LONG AN IMPLIED WARRANTY LASTS AND/OR DO NOT ALLOW THE EXCLUSION OR LIMITATION OF CONSEQUENTIAL DAMAGES. THE ABOVE LIMITATIONS ON IMPLIED WARRANTY AND CONSEQUENTIAL DAMAGES MAY NOT APPLY TO YOU. THIS WARRANTY GIVES YOU SPECIFIC LEGAL RIGHTS. YOU MAY HAVE OTHER RIGHTS WHICH VARY FROM STATE TO STATE.
- NOTE: FOR YOUR PROTECTION IN THE EVENT OF THEFT OR LOSS OF THIS PRODUCT, PLEASE FILL IN THE INFORMATION REQUESTED BELOW AND RETAIN WITH YOUR SALES RECEIPT.**

MODEL NO.: _____ SERIAL NO.: _____
(LOCATED ON BACK OR BOTTOM OF UNIT)
DATE OF PURCHASE: _____
WHERE PURCHASED: _____ PURCHASE PRICE: _____

Speco Technologies
200 New Highway
Amityville, NY 11701
www.specotech.com

FOR MORE INFORMATION REGARDING SERVICE OR RETURN,
CALL US TOLL FREE: 1-800-645-5516 IN METRO NY: 631-957-8700

ALWAYS USE DISCRETION WHEN INSTALLING VIDEO AND/OR AUDIO SURVEILLANCE EQUIPMENT ESPECIALLY WHEN THERE IS AN EXPECTATION OF PRIVACY. INQUIRE REGARDING FEDERAL, STATE AND/OR LOCAL REGULATIONS APPLICABLE TO THE LAWFUL INSTALLATION OF VIDEO AND/OR AUDIO RECORDING OR SURVEILLANCE EQUIPMENT. PARTY CONSENT MAY BE REQUIRED.

Speco Technologies is constantly developing product improvements.
We reserve the right to modify product design and specifications without notice and without incurring any obligation. Rev. 220415