
Y19说明书规格:

材质: 128G 铜版纸



⇔ →? WHAT'S IN THE BOX?

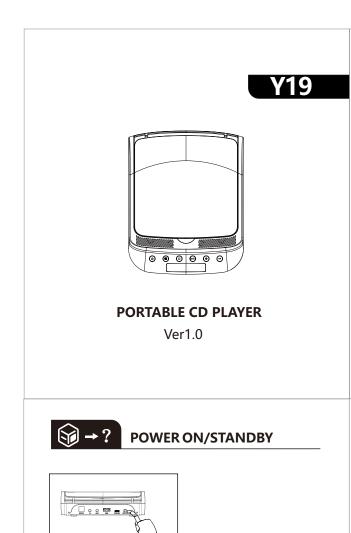

① CD Player ② Type-C charging ③Remote control cable






5 Instruction manual 3.5mm aux cable

□ →? PRODUCT SPECIFICATIONS

Product name	CD Player
Input power	DC 5V/2A
Bluetooth version	5.0
BT protocol support	ADP/AVRCP
BT receiving distance	10M
Battery capacity	3.6V/2600mAh
Output Power	speaker(4Ω)2X2W; earphone(16Ω)2X20mW
USB playback format	MP3/WMA/WAV/APE/FLAC
CD playback format	CD-DA/MP3/CD-R
Audio In	3.5mm Audio In
Analog audio output	3.5mm stereo headphone output
Charging cable length	80CM
Product Size	160x200x46.5mm
Product weight	about 490g
Product accessories	(charging cable、audio cable、manual、remote)×1

⊗ →? BUTTON PANEL CONTROLS




①UPPER COVER ②LEFT CHANNEL SPEAKER ③STANDBY/ON **4**SHORT PRESS:INPUT SOURCE SELECTION(CD,USB,AUX,BT) LONG PRESS:BT TRANSMITTER (5)STOP

©LED DISPLAY ⑦SHORT PRESS:PLAY/PAUSE LONG PRESS:CYCLE MODE SELECTION **®SHORT PRESS:PREVIOUS** LONG PRESS:VOLUME+

LONG PRESS:VOLUME—


@RIGHT CHANNEL SPEAKER


(S) →? REAR PANEL CONNECTIONS



①OPTICAL FIBER OUTPUT ②HEADPHONES AUDIO OUTPUT TERMINAL **3AUXLIARY INPUT @USB SLOT** ⑤TYPE-C POWER TERMINAL




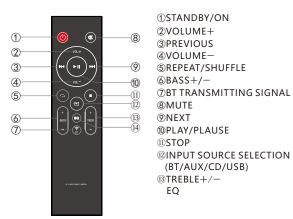










Turn the switch to ON state button ⑥ on the rear panel

(a) (b)


the STANDBY button

once again



To turn on the unit, click the STANDBY button 3 To put the unit into standby mode, click on the button panel

₿ →? BLUETOOTH MODE




Select the Bluetooth mode.Click the SOURCE(button ④) on the button panel, until the BT option appears on the screen. The light will start flashing, which means the unit is ready to pair




Search for the pairing name THINKYA CD in the list of Bluetooth devices

Stay close. The effective range of Bluetooth devices is 10 meters




$\psi \rightarrow ?$ USB-MP3



 $\begin{tabular}{ll} \begin{tabular}{ll} \beg$






Select the USB mode. Devices compatible with USB 2.0 Size 32Gb

Select the USB mode.

Using the button panel (SOURCE button(4))




Select the CD mode.
Using the button panel (SOURCE button 4)




Click Play(button®) on the button panel. You can play your CD-DA,CD-R and CD with files in MP3 format



the CD into the tray




Press the STOP(button⑤) on the button panel to stop playback



6SWITCH

To search for a section on a CD track,long press the NEXT (button ®) or PREVIOUS(button ®) during playback, then release it at the point you want to



Long pressing the PLAY (button?) on the button (6) panel for the first time will enter the single loop, the second time will enter the all loops, the third time will enter the random play, the fourth time will turn off loop playback



China est2006

Follow us!Thinkya (\mathbf{f}) www.gzbluelight.com

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- —Reorient or relocate the receiving antenna.
- —Increase the separation between the equipment and receiver.
- —Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- —Consult the dealer or an experienced radio/TV technician for help.

RF Exposure Statement

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.