

typecase®

EDGE

User Manual

compatible with
iPad Pro 12.9



For warranty registration and product support:



typecase.co/resources



+1(832) 303-5080



support@typecase.co

TABLE OF CONTENTS

TECHNICAL SUPPORT 1

COMPATIBILITY 1

SETUP 2

SHORTCUT MAP 3

TOUCHPAD FUNCTION 3

TOUCHPAD FUNCTION 4

INSTALLATION AND REMOVAL 5

CHARGING 6

TROUBLESHOOTING 6

PRODUCT SPECS 7

COMPLIANCE 7

TECHNICAL SUPPORT

If you have any issues or questions, let us know ASAP! We would love to get you taken care of and happy right away! All units come with a full 12 month warranty, so you can relax and take comfort in your purchase.


For the fastest & friendliest support, contact us (not Amazon) via one of the contact methods below.


1. Email: support@typecase.co
2. Phone: 832 - 303 - 5080
3. Chat: <https://typecase.co/support>

COMPATIBILITY

Compatible with iPadOS 13 (and newer). We recommend updating your iPadOS to **13.4.1** for best performance.


To check your iPad system version:

1. Go to Settings  > General > About > Software Version.
2. Upgrade your version to iPadOS **13.4.1** or above to use the touchpad function correctly.

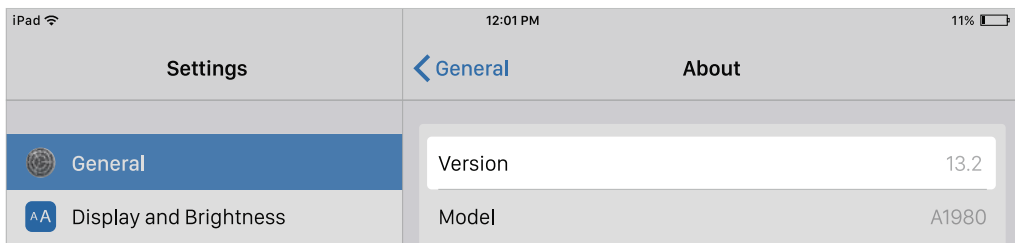

To upgrade your iPadOS to the latest version:

1. Open your device's Settings  > General > Software Update.

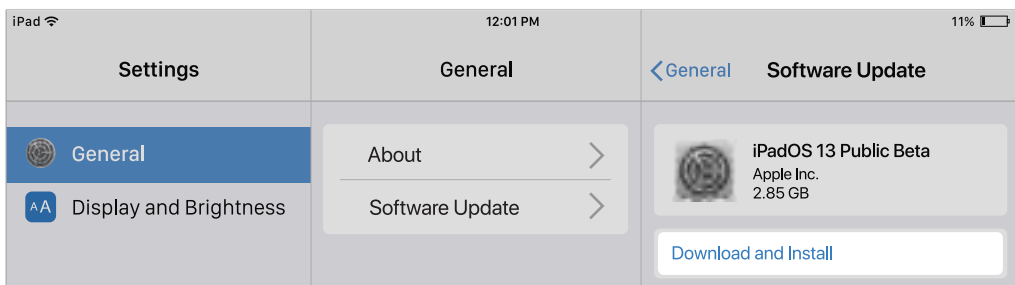





2. Tap Download and Install.

* If you see Resume Download, tap that instead.


SETUP

To pair with your iPad:

1. Switch **ON/OFF** switch to **ON** position.
2. Bluetooth indicator light will start blinking.
If Bluetooth indicator light does not start blinking, press and hold the  button for **3 seconds**.
3. Toggle Bluetooth ON in the Settings app  (device is connected when Bluetooth indicator stops flashing).

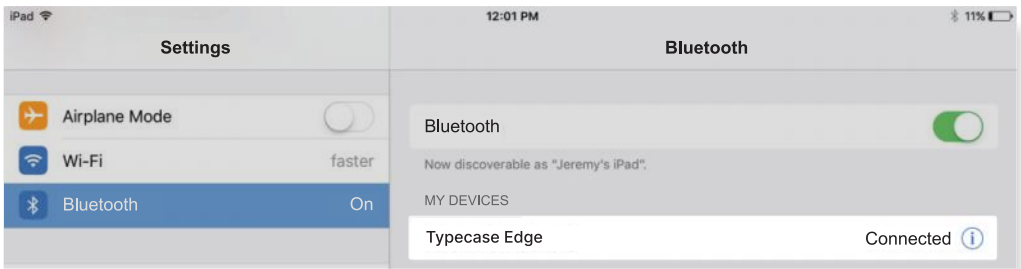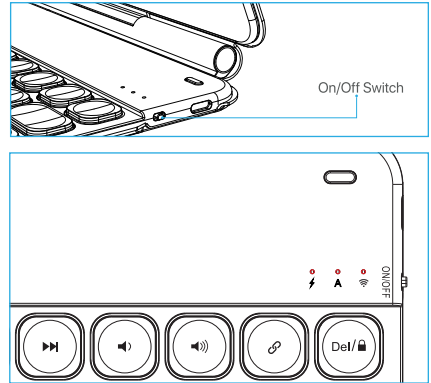


4. Tap '**Typecase Edge**' under '**MY DEVICES**' in the Bluetooth section of the Settings app.

5. Tap  in the pop-up window like shown below.


* **When pairing to new devices, please repeat steps 1-3.**

Pairing process is considered complete after '**Connected**' indicator appears.

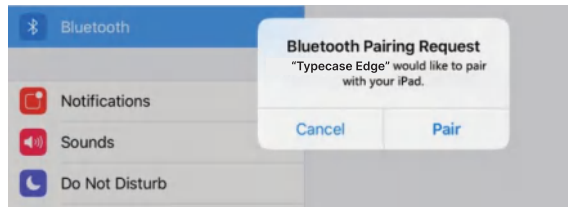


If your system is 13.3.1, please follow the steps to enable touchpad function:

1. Go to Settings  > Accessibility > Touch.
2. Make sure **Assistive Touch** option is turned On.

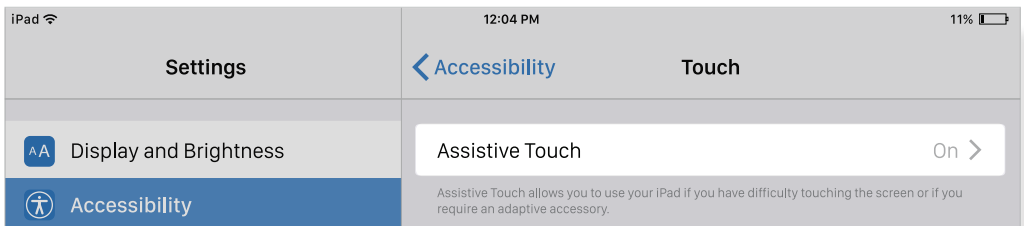

SHORTCUT MAP


Notice: Long Hold  **in any app to view available shortcuts.**

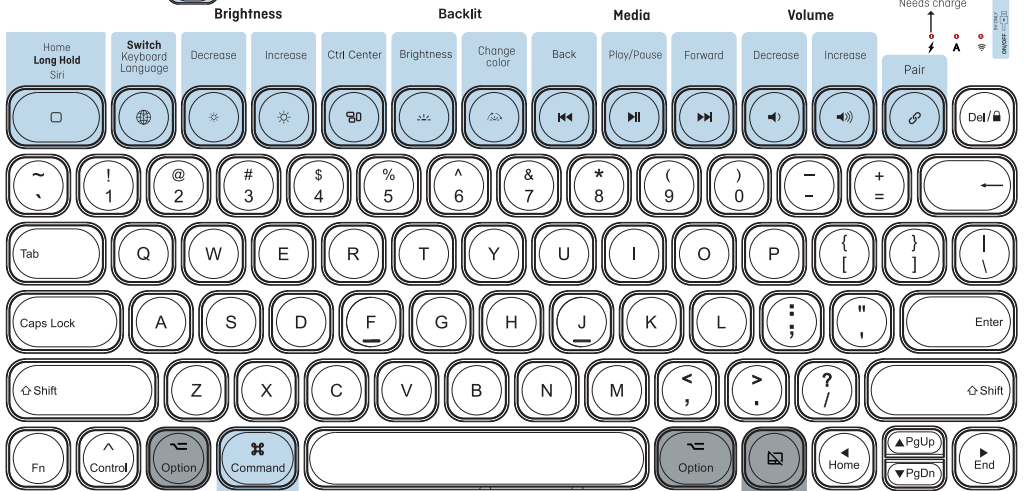

Shortcut Keys

CMD+Tab=APP switch
CMD+A=Select all
CMD+C=Copy
CMD+V=Paste
FN+Space = Battery Remaining

Long Hold-App specific shortcut shows up
(e.g. when you are in an App,hold this key and you will see all the shortcuts that can be used in this App)


CMD+Z=Undo
CMD+X=Cut
CMD+Shift+3=Screen Shot
=Change backlight color

Touchpad ON/OFF

Light=Backlight brightness(low, medium,high,off)
Fn+Del=Screen Lock/Unlock
Option+Shift+2=€,Option+3=£


TOUCHPAD FUNCTION

Notice: Make sure bluetooth connected and touchpad function turned on !





One Finger Tap Mode

Action 1: Tap one time while on main interface;
Function: mouse cursor manipulation.
Action 2: tap 2 times and slide;
Function: select or move the ico.
Jump out of the mode: refer to the right instruction.
Action 3: Tap two times when iPad is in sleeping mode
Function: Wake up iPad




Two Fingers Tap Mode

Action 4: Tap the pad one time;
Function: Show the shortcuts.




Two Fingers Scroll

Action 5: Slide fingers up or down;
Function: Scroll web page or file up/down or scroll splitted screen
Action 6: Slide fingers left or right
Function: Turn the page to the left or right




Two Fingers Zoom

Action 7: Two fingers slide for zooming in or out.
Function: Can only be used on the websites or spreadsheets.




Three Fingers Swipe UP

Action 8: Swipe Up;
Function: Switch between Main interface and previous program or page.




Three Fingers Swipe Down

Action 9: Swipe Down;
Function: Switch between main interface and splitted screen.




Shift+Cursor

Function: Select the text




Move the cursor to the bottom of the screen

Function: Get access to the dock to switch




Move the cursor to the upper corner

Function: Enter the control center



Usage for Excel-Apply the cursor on one cell

1. Drag the cell to the right: Make the cell wider
2. Drag the cell to up or down: Multiple choose cells




In App Page:

Touch and hold the left pad, you can drag the app icon to where you want


In Edit Page:

Touch and hold the left pad, you can choose the text you want and you can drag and drop the text to around.

Touch and hold the right pad, there will be shortcut for you to choose




Touch and hold the right pad, show the menu for the APP (Same as Right Click on Mouse)




INSTALLATION AND REMOVAL

Installation:



Gently attach the iPad to the case.

Removal:



Pull up to remove the iPad from the case.



01




02



03

If you want to hold the iPad in the case, fold the case, makes it easy to carry.

CHARGING

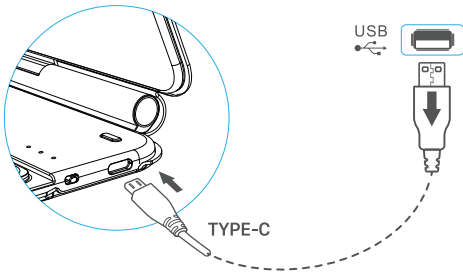


iPad adapters

1. Switch on the keyboard (if battery light is flashing, please charge the keyboard).
2. Plug the charging cable (included) into the keyboard and power adapter (not included, iPad or iPhone power adapter recommended);
 - a) Battery indicator turns red when keyboard is charging;
 - b) Battery indicator turns blue when charging is complete.


TROUBLESHOOTING

If the keyboard is not working correctly, please check the following:

1. The Bluetooth function on the iPad (or other Bluetooth devices) is enabled;
2. The Bluetooth keyboard is within 33 feet;
3. The Bluetooth keyboard is charged;
4. Make sure the keyboard is turned on (the battery indicator is illuminated);
5. Press the key  and check the Bluetooth status;
6. Make sure a keyboard has already paired via Bluetooth.

If you have unwanted auto-correction or punctuation, please follow these steps:

1. Open Settings app > General > Keyboard > **Hardware Keyboard**;
2. Toggle **OFF** Auto-Capitalization, Auto-Correction, and "." shortcut (please refer to the picture below).

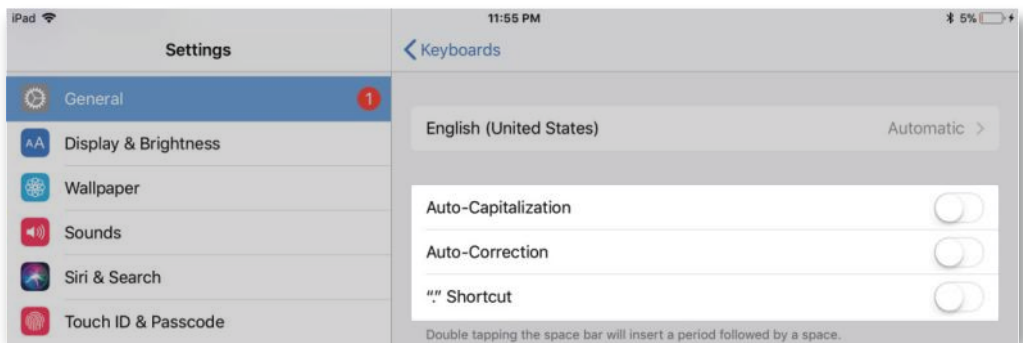

If Bluetooth pairing fails ,please try the following steps:

1. Remove all Bluetooth devices on your iPad;
2. Switch off the Bluetooth function on your iPad;
3. Reboot the iPad;
4. Turn on the Bluetooth on your iPad;
5. Switch the keyboard off and on;
6. Repeat the steps described on page 2 and 3 to pair the keyboard.

PRODUCT SPECS

Operating distance: 10 meters (33 feet)

Modulation System: GFSK

Working voltage: 3.0-4.2V

Working current: 0.88-200mA

Sleeping current: < 125μA

Charging current: <800mA

**Continuous working
time without backlight:** 60 hours

Charging time: <2.5hours

Charging voltage: 5V

Key's life span: > 5 million strokes

Operating temperature: -10 ±55°C

Maintenance: Please preserve the keyboard under normal temperature and recharge under normal voltage.

COMPLIANCE

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna;
- Increase the separation between the equipment and receiver;
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected;
- Consult the dealer or an experienced radio/TV technician for help.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- 1) this device may not cause harmful interference, and
- 2) this device must accept any interference received, including interference that may cause undesired operation.