



Wi-Fi CAMERA Quick-operation Manual

Download for App

1. Search for "TUYA" app in App Store/App Market, or scan the QR code below to download.



Scan the QR Code to Download TUYA Smart APP

User Registration

1. Open the TUYA Smart APP, click Register as the following pictures.
2. The system automatically determines the current country, or you could choose your country then put the mobile number or email address, then click agree Privacy Policy, then enter verification code as the following pictures.
3. After you get the verification code, then put the password to finish registration. At last, put the account to log in as the following picture.



Add the Device

1. When you get this product, please make sure to connect with the standard power adaptor in the accessories, otherwise the device may not working properly. Before connecting, please make sure the mobile already connected the Wi-Fi 2.4GHz/5GHz. (**Note:** If the device supports dual-band, you can choose WiFi in 5GHz; if

the device does not support dual-band, you can only choose WiFi network in 2.4GHz)


2. Open the TUYA smart app "My Home" and click the "+" add button in the upper right corner to add a device, entering the add device interface. As shown in the following figure:




3. After entering the add device interface, there are three options for network configuration:


(1)[Bluetooth Network Configuration]: First, open the Bluetooth of your phone, then enter the Add Device interface. The top of the interface will display the search for nearby devices. After searching for a device, select the device you want to add, click [Add], enter the current WiFi password, and click "Next" to enter the WIFI

selection interface Then enter the device connection, and the device successfully connects to the network. The message "Add successful" appears as shown in the following figure.

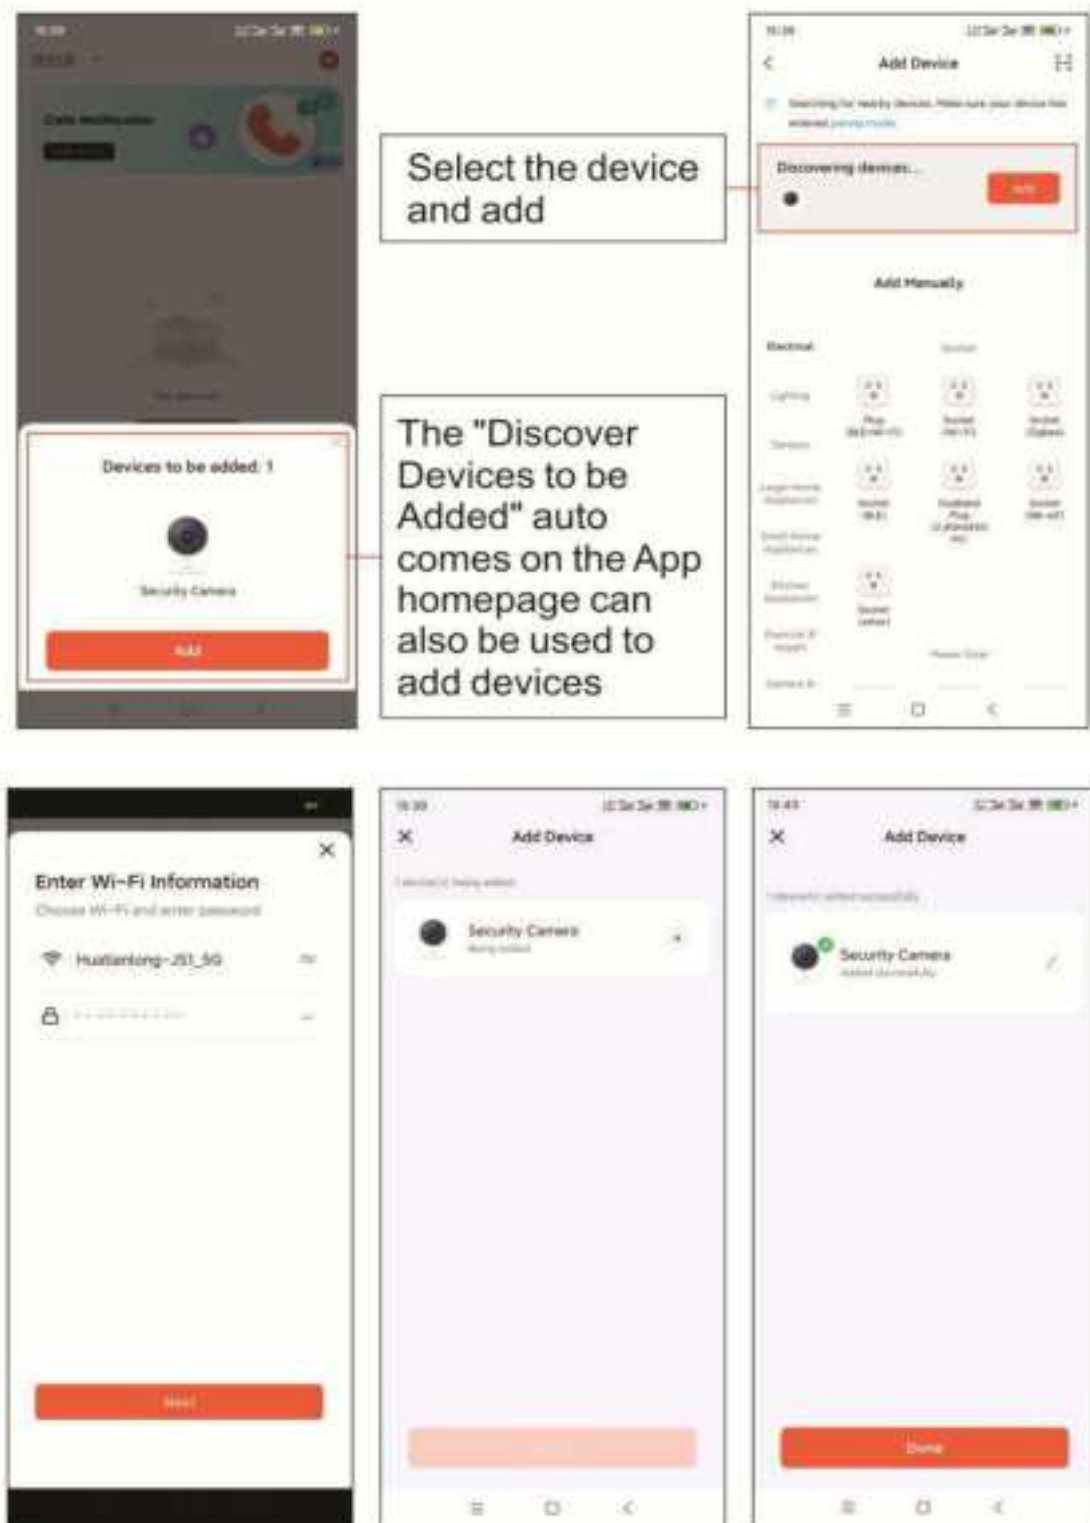

(2)[AP Hotspot]: After entering the device add interface, select [Smart Camera(2.4GHz&5GHz)], then select [Wi-Fi Mode], and click "Next" after entering. Then go to the settings for connecting device hotspots (select WiFi with Smart Life_XXX/SL_XXX field on the device). Enter the WIFI search interface, select the WIFI of the device hotspot, click connect, and after successfully connecting to the hotspot WiFi, click return to exit the interface. After exiting, you will enter the "Connected Device Hotspot" interface, click "Next" to enter the WIFI selection interface, enter the current WiFi password, and click "Next". Entering the device connection, the device successfully connects to the network and displays "Add Successful" as shown in the following figure.

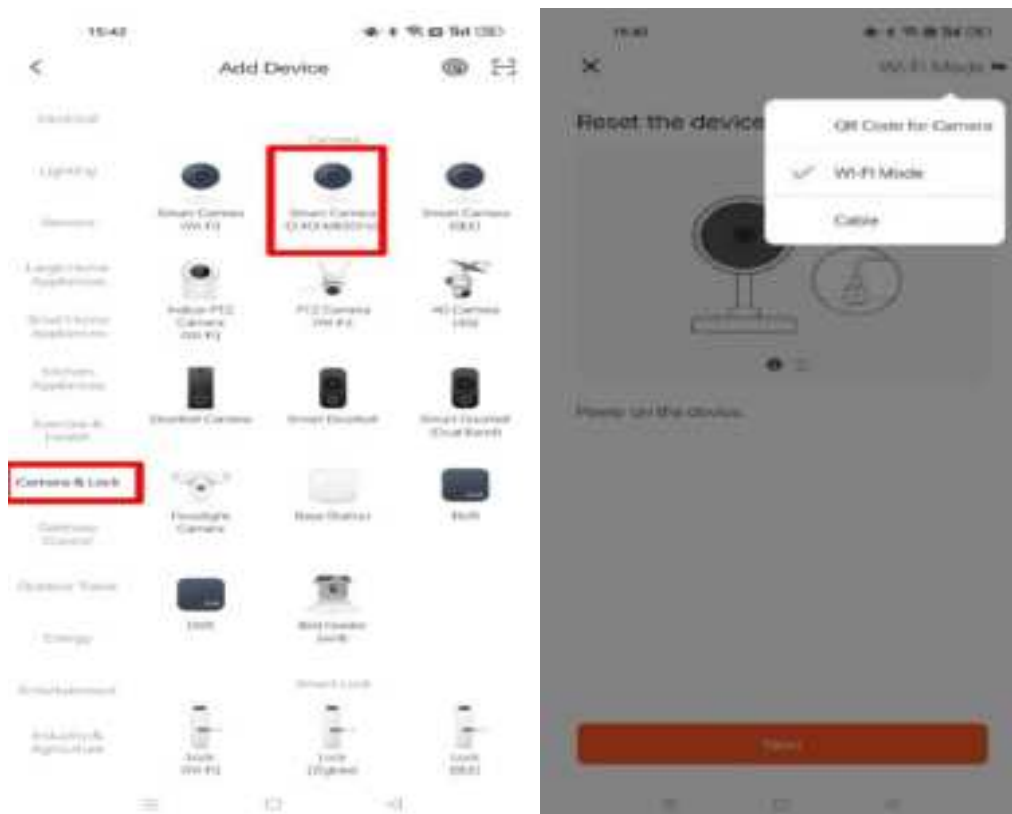


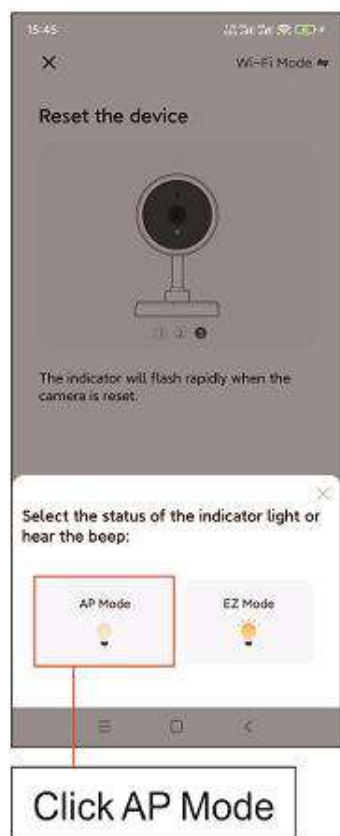






Connect success
with device WiFi
hotspot

Choose "Device
WiFi hotspot"

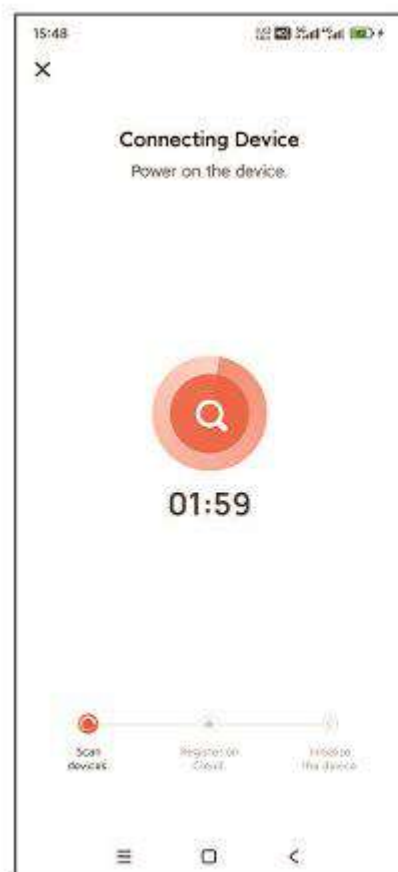

(3) [Cable Direct Connection]: After entering the add device interface, select [Camera/Lock], and then select [Smart Camera 2.4GHz&5GHz] to enter the next interface. In the upper right corner of the reset device interface, select Switch to [Cable], click "Next", then click "Next", and enter the "Connecting Device" interface (the network connected to the phone and the network connected to the device must be in the same local networking area for searching). The device successfully connects to the network and "Added Successfully" appears as shown in the following figure.

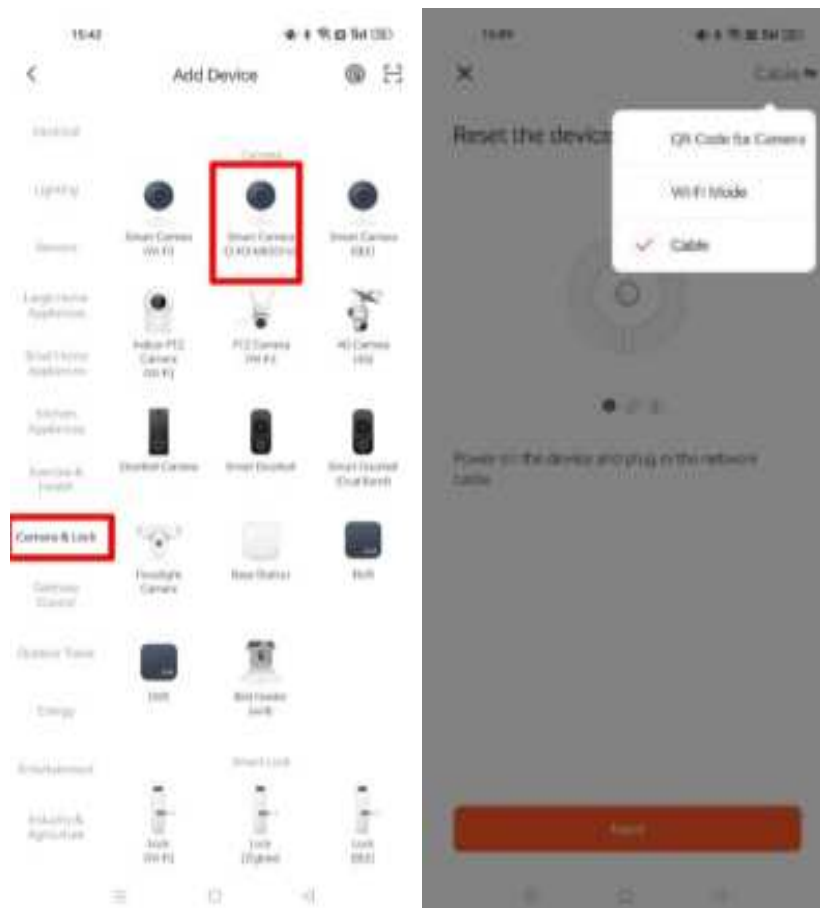

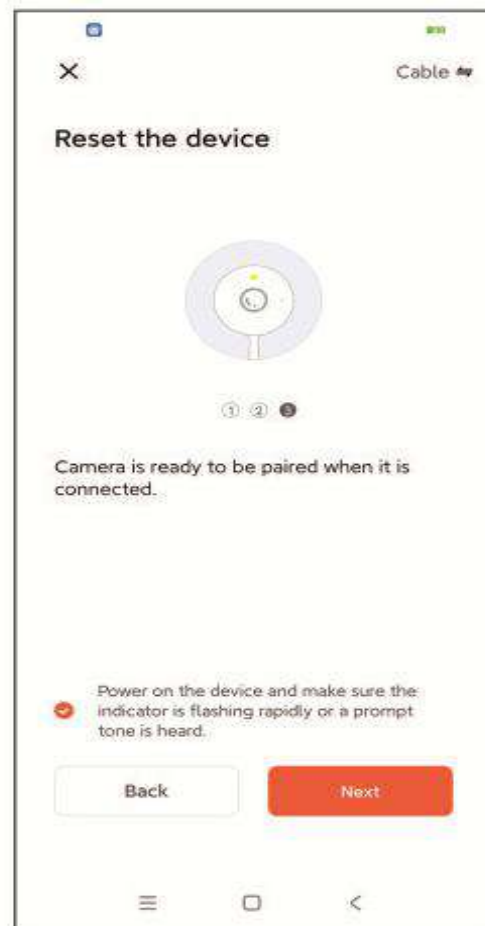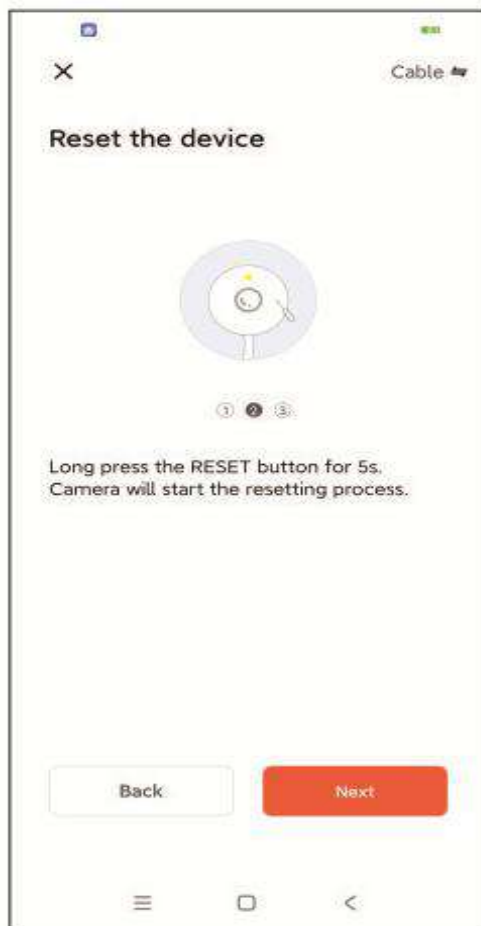

4. If there is a failure to configure or upgrade the network connection, press the reset button for 5 seconds and wait for the device to restart before re-configuring.

FAQ

1. Connection Problem:

Q: Why the device can't connect to the server?

A: Check the network connection

B: Check DNS configuration for the router

C: Check if the router got any white list.

Q: How to do with the device when it showed disconnected?

A: Firstly to make sure the device is power on and the network connection is OK. If without any problem, try to reboot it. After reboot, if it is still the same problem, try to reset then do the network configuration again. If still not solved the problem, try to make the device near the router.

Q: Why the device can't connect to WIFI?

A: Now it supports 802.11b/g/n at 2.4GHz&5GHz WIFI.(**Note:** If the device supports dual-band, you can choose WIFI in 5GHz; if the device does not support dual-band, you can only choose WIFI network in 2.4GHz) Please make sure the WIFI signal is within the range.

B: Because the Chinese coding mode may have the compatibility, we suggest you make the WIFI in English

C: Please keep the device near the router when you do the network configuration.

Q: Why we couldn't recognize the WIFI when we do the network configuration?

A: Please turn on the location permission in the IOS or Android mobile.

2. Operation Problem.

Q: How shall we add the mobile number to let the family members to view in the APP?

A: Open the APP and choose share the device and then put the mobile number.

Q: Why the camera showed upside down?

A: If the camera hang upside down, it will show like this, you could set the flip screen on in the APP.

Q: How to do if warning message is sending too frequently?

A: Please set the Alarm setting in the APP as your request.

Q: Why there is noise when preview?

A: Please keep the mobile away from the camera.

Q: How to do if the PTZ is not working?

A: Try to reboot the APP or Camera power off reboot

Q: Why there is no sound when checking the video?

A: Firstly check whether the microphone is on for the camera. Then check the speaker is on in the APP and whether the mobile is in sound off.

Q: In the mobile, we couldn't hear the voice from the camera. What shall we do?

A: First, check whether the management permission for microphone or speaker in the APP with your mobile phone. IOS users can turn on the microphone permission of the APP in the privacy settings of the system. The Android phone finds the permission management settings in the phone, such as application management, mobile phone manager, security center, etc., to opens the microphone and speaker permissions.

Q: Is the Talkback function is the same as making mobile calls?

A: If the APP shows hold the button then talk, it is one way communication as WeChat.

B: If the APP shows Intercom, it is two way communication as calling.

3. Account Questions.

Q: When the client registers an account in the APP, it prompts that it has been registered. What shall we do?

A: If so, it means you already have an account with this mobile number, just log in.

Q: How shall we do if we couldn't log in the APP?

A: Please make sure the network connection for the mobile works well, try to use mobile network or change WIFI to check. If showed failure, it may the problem for network DNS analyze. Please try to reboot your mobile or change the network connection again.

Q: What shall we do if we forgot the password for the APP?

A: Please click forget the password to change new password with the verification code.