λutonomous

# SmartDesk 5 Pro

## Assembly Guide

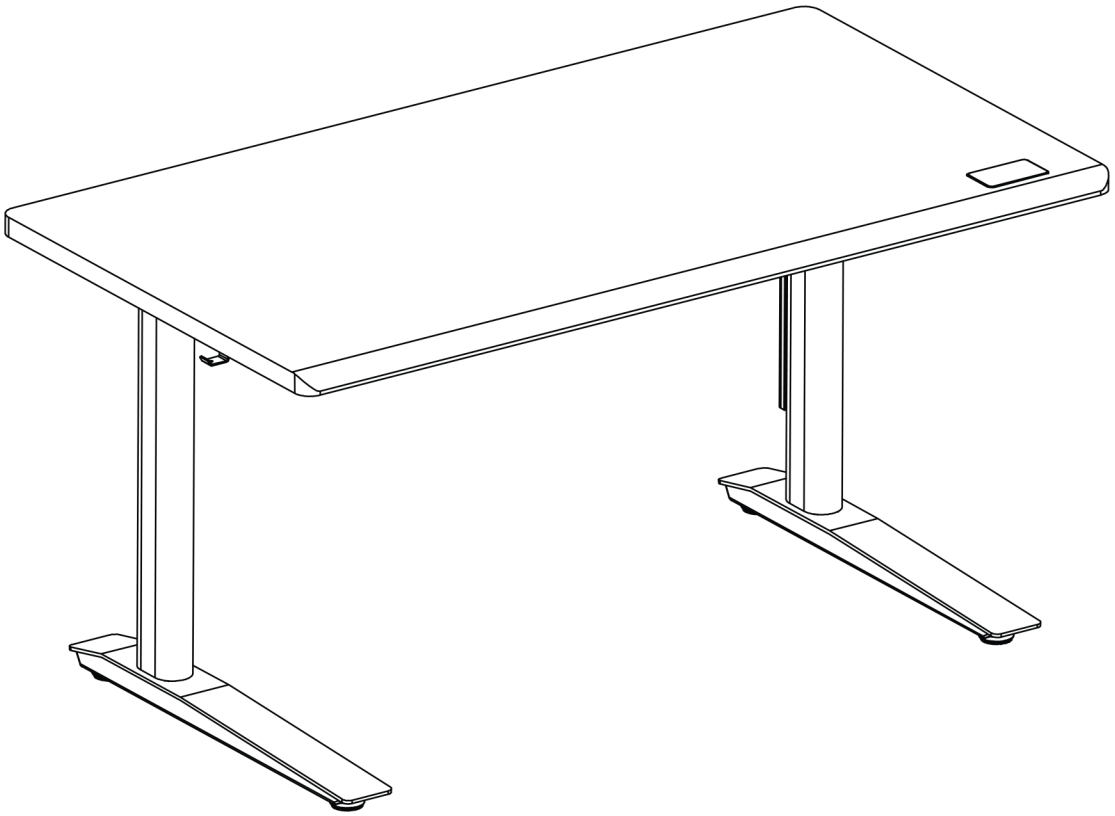

**Assembly Time**

**30-45** min

**Number of People**

**2**

www.autonomous.ai

# TABLE OF CONTENTS


**CAUTION** 1

**INCLUDED PARTS** 2

**ASSEMBLY GUIDE**

- COLUMN ASSEMBLY 3
- SIDE BRACKET ASSEMBLY 4
- FOOT ASSEMBLY 5
- CENTER RAIL ASSEMBLY 6
- FRAME INSTALLATION 7
- CABLE TRAY ASSEMBLY 9
- DESK FLIPPING 10
- CABLE MANAGEMENT 11
- ACCESSORY INSTALLATION 12

**SETUP KEYPAD**

- RESET INSTRUCTION 13
- HEIGHT ADJUSTMENT & MEMORY SETUP 14
- ANTI-COLLISION LEVEL SETTINGS 15

# CAUTION

READ AND FOLLOW ASSEMBLY INSTRUCTIONS CAREFULLY BEFORE USE.

Keep kids and pets away during use.

Unplug during storms or long unused periods.



Keep desktop away from walls for ventilation.

Keep the under-desk area (20"+) obstacle-free during use.




Keep the desk in 0-40°C, away from dust and corrosives.

Do not disassemble without permission.

Manually reset after first use or power outage.

# INCLUDED PARTS

Desktop

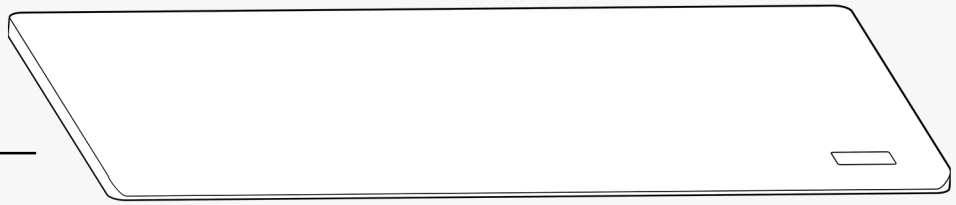

Power Cord





Keypad

Control Box

Power Outlet



Cable Tray

Cable Organizer

Columns

x 2

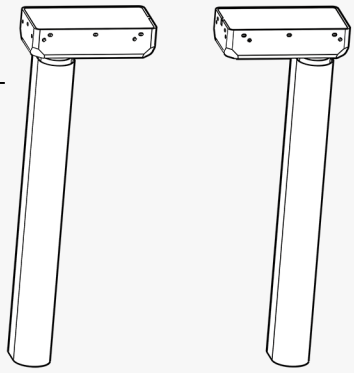

Hooks

x 2

Upper Tube

Feet

x 2





Side Brackets

x 2

Center Rails

x 2



Frames

x 2

**A** **M6x10** Screws



**x 16**

**B** **M6x14** Screws



**x 20**

**C** **M6x12** Screws



**x 12**

**D** **M4** Wrench

**x 1**

**E** **M6x14** Hand Screws



**x 2**

**F** Zip Ties

**x 10**

Ⓐ **M6x10** Screws x8

Ⓓ **M4** Wrench

Ⓒ **M6x12** Screws x8

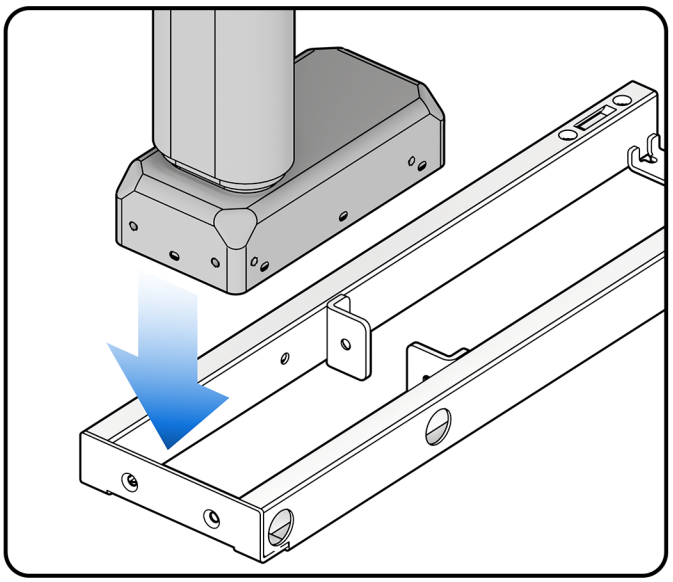

**1.** Attach **Columns** to the **Frame**

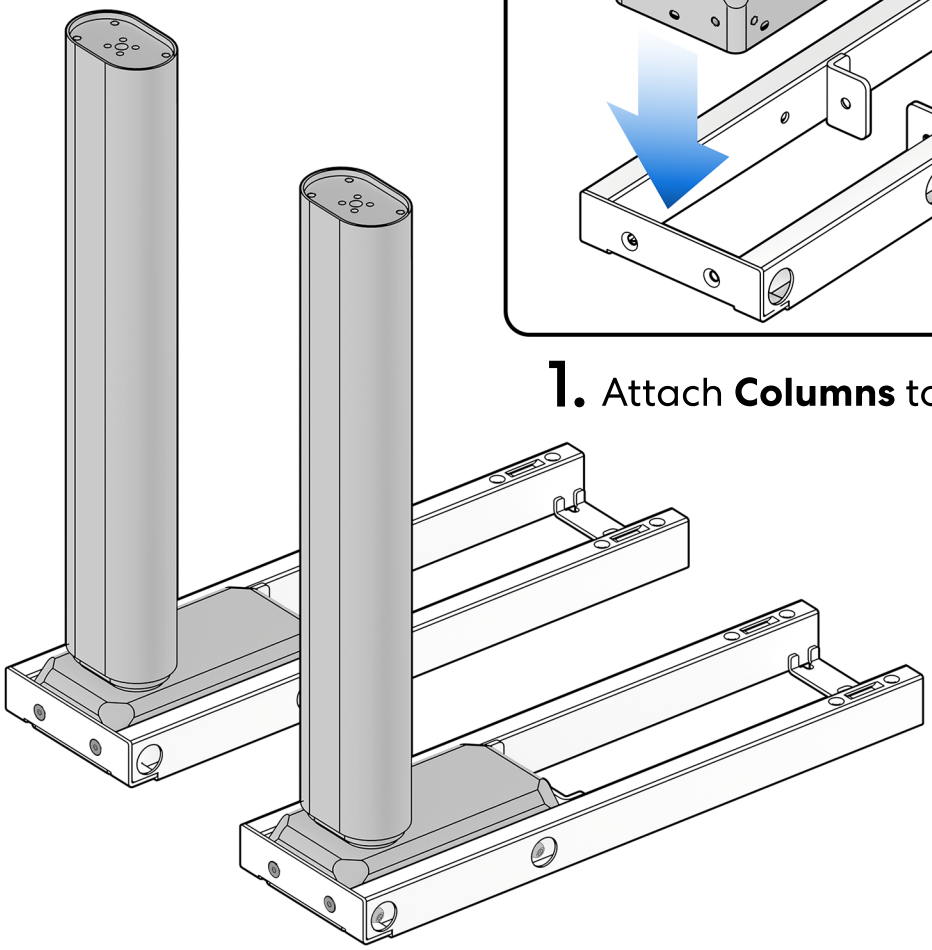

**2.** Easily align the screw positions by inserting 4 screws Ⓒ (2.1) and 4 screws Ⓐ (2.2), without tightening

2.1

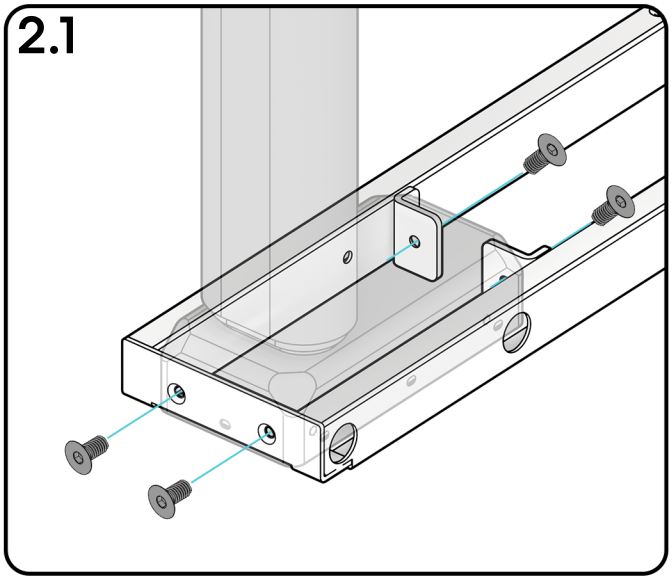

2.2

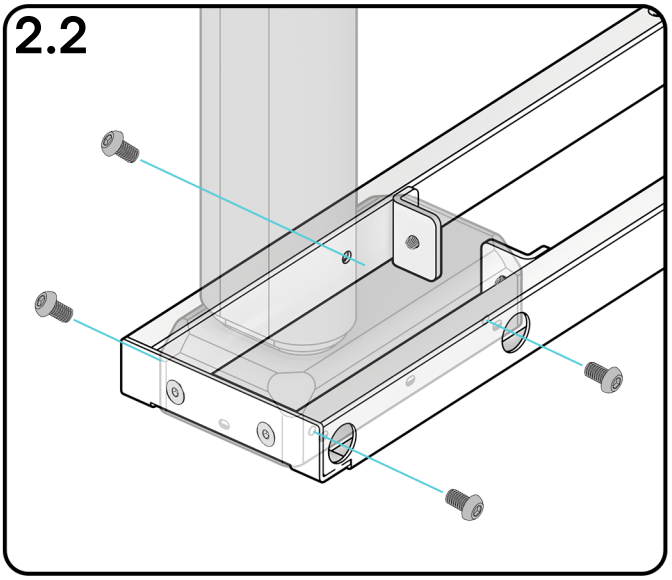

**3.** Tighten screws Ⓒ (2.1) and screws Ⓐ (2.2)

**C** **M6x12** Screws x4



**D** **M4** Wrench

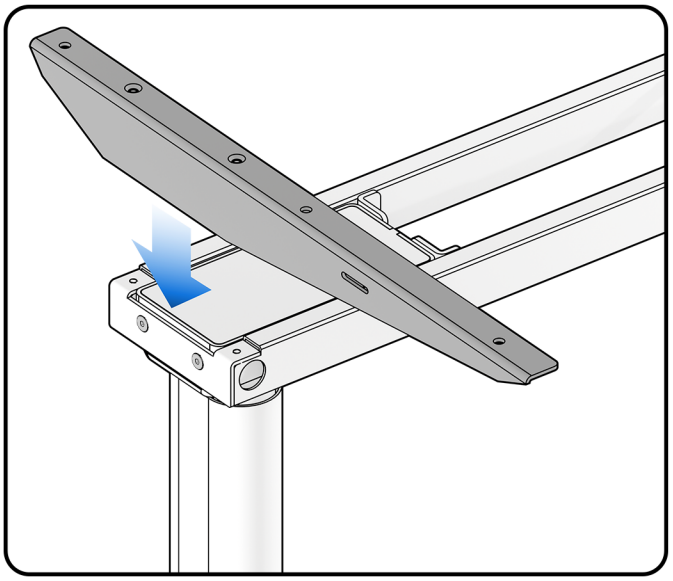

**1.** Attach **Side Brackets** to the **Frame**

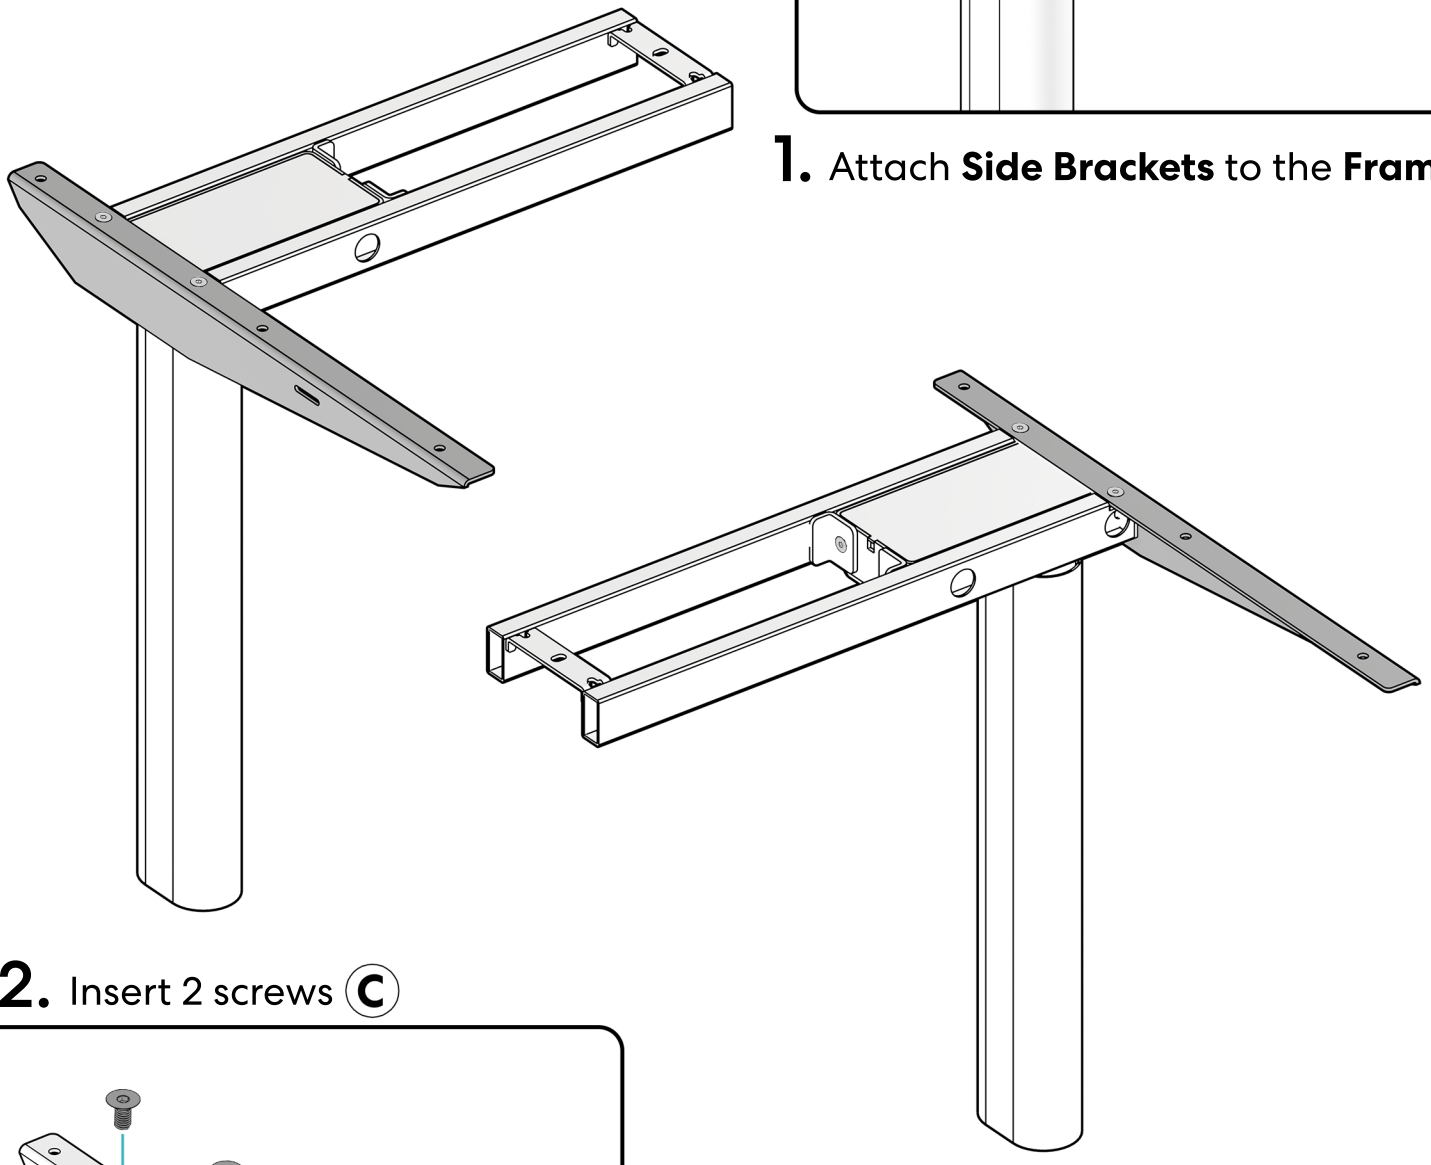

**2.** Insert 2 screws **C**

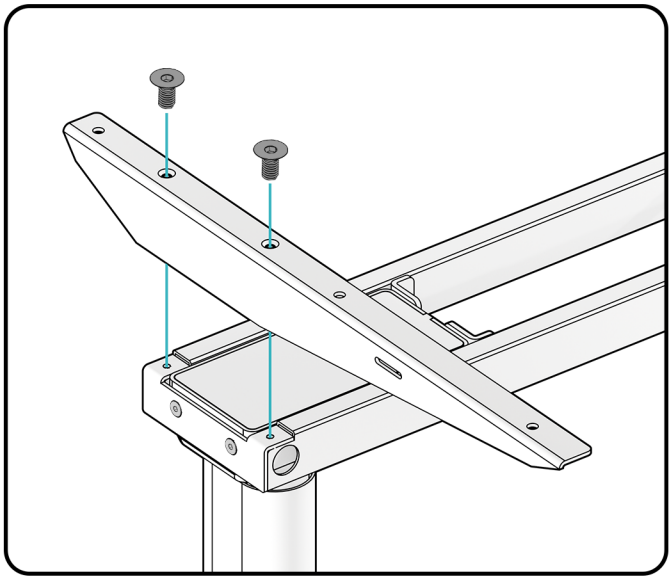

**B** **M6x14** Screws



x8

**D** **M4** Wrench

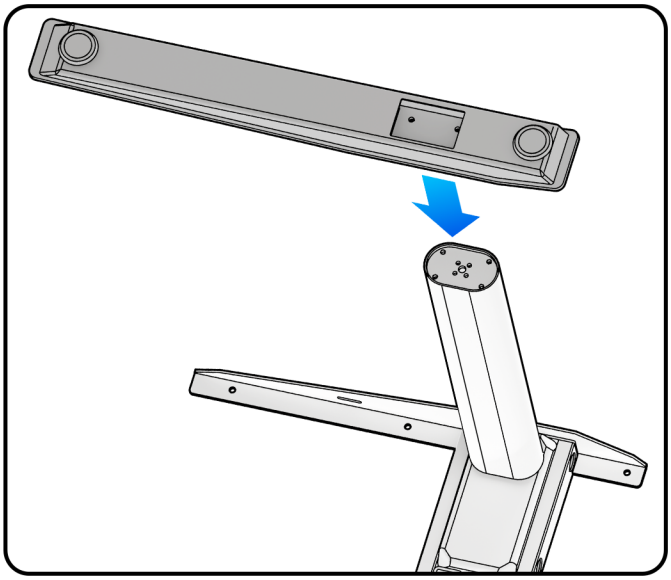

**1.** Attach **Feet** to **Columns**

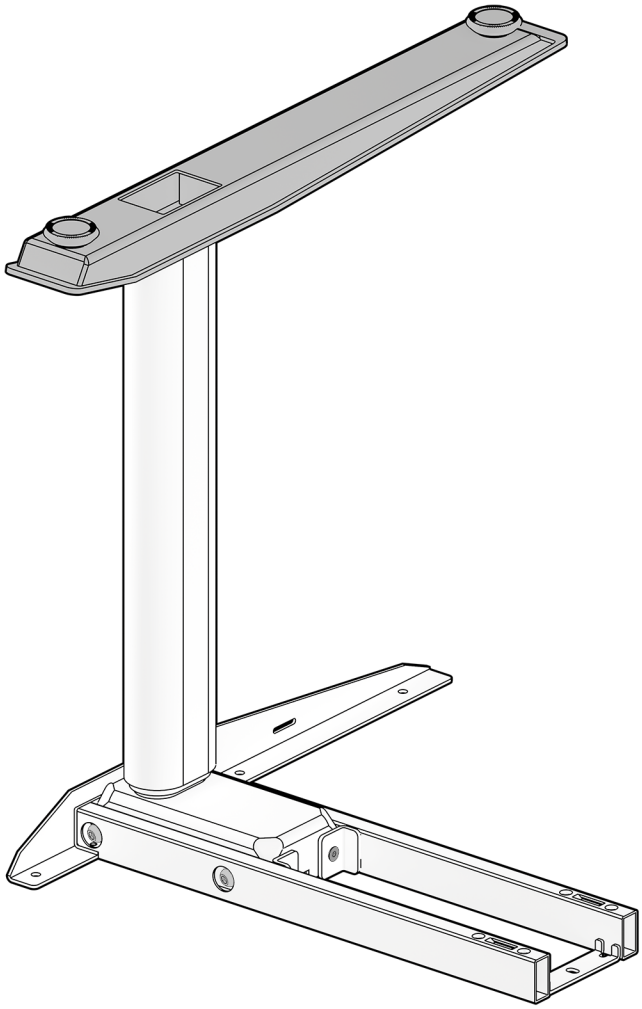

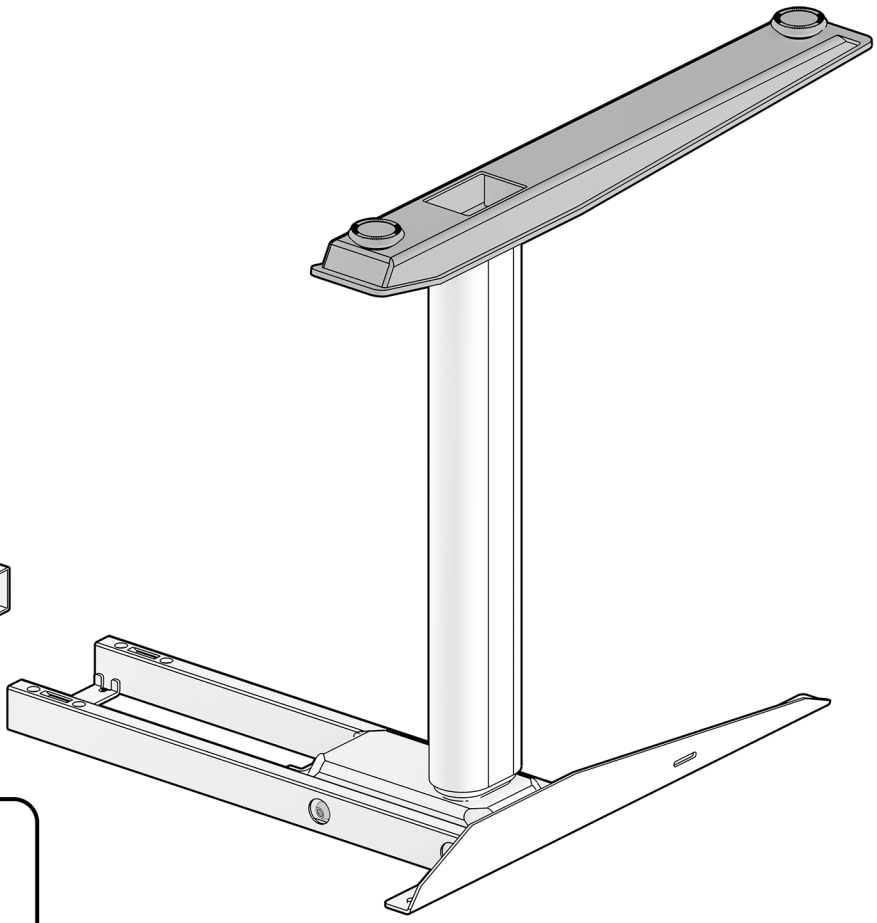

**2.** Insert 4 screws **B**

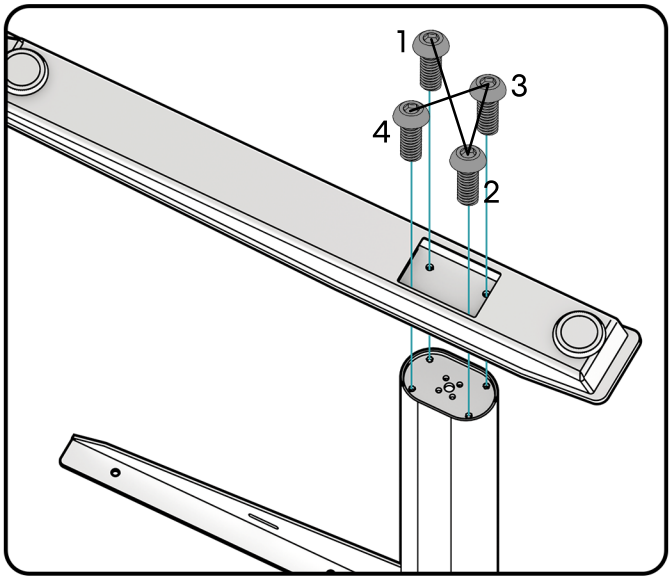

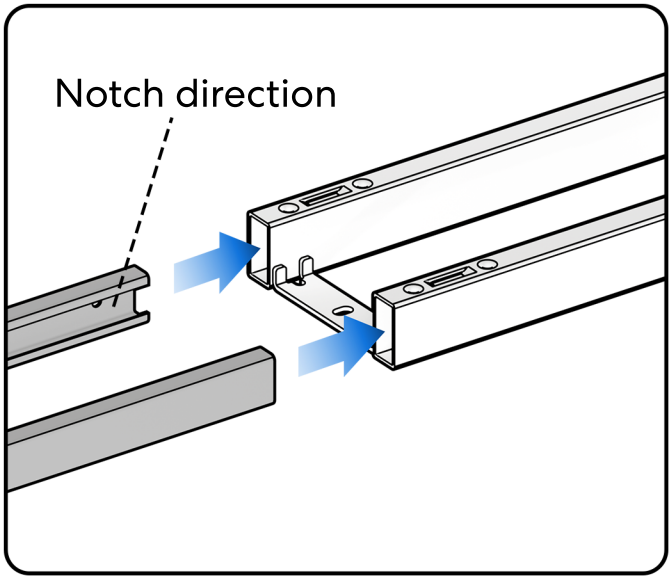


D **M4** Wrench

A **M6x10** Screws



x8

**1.** Attach **Center Rails** to the **Frame**, following the notch direction

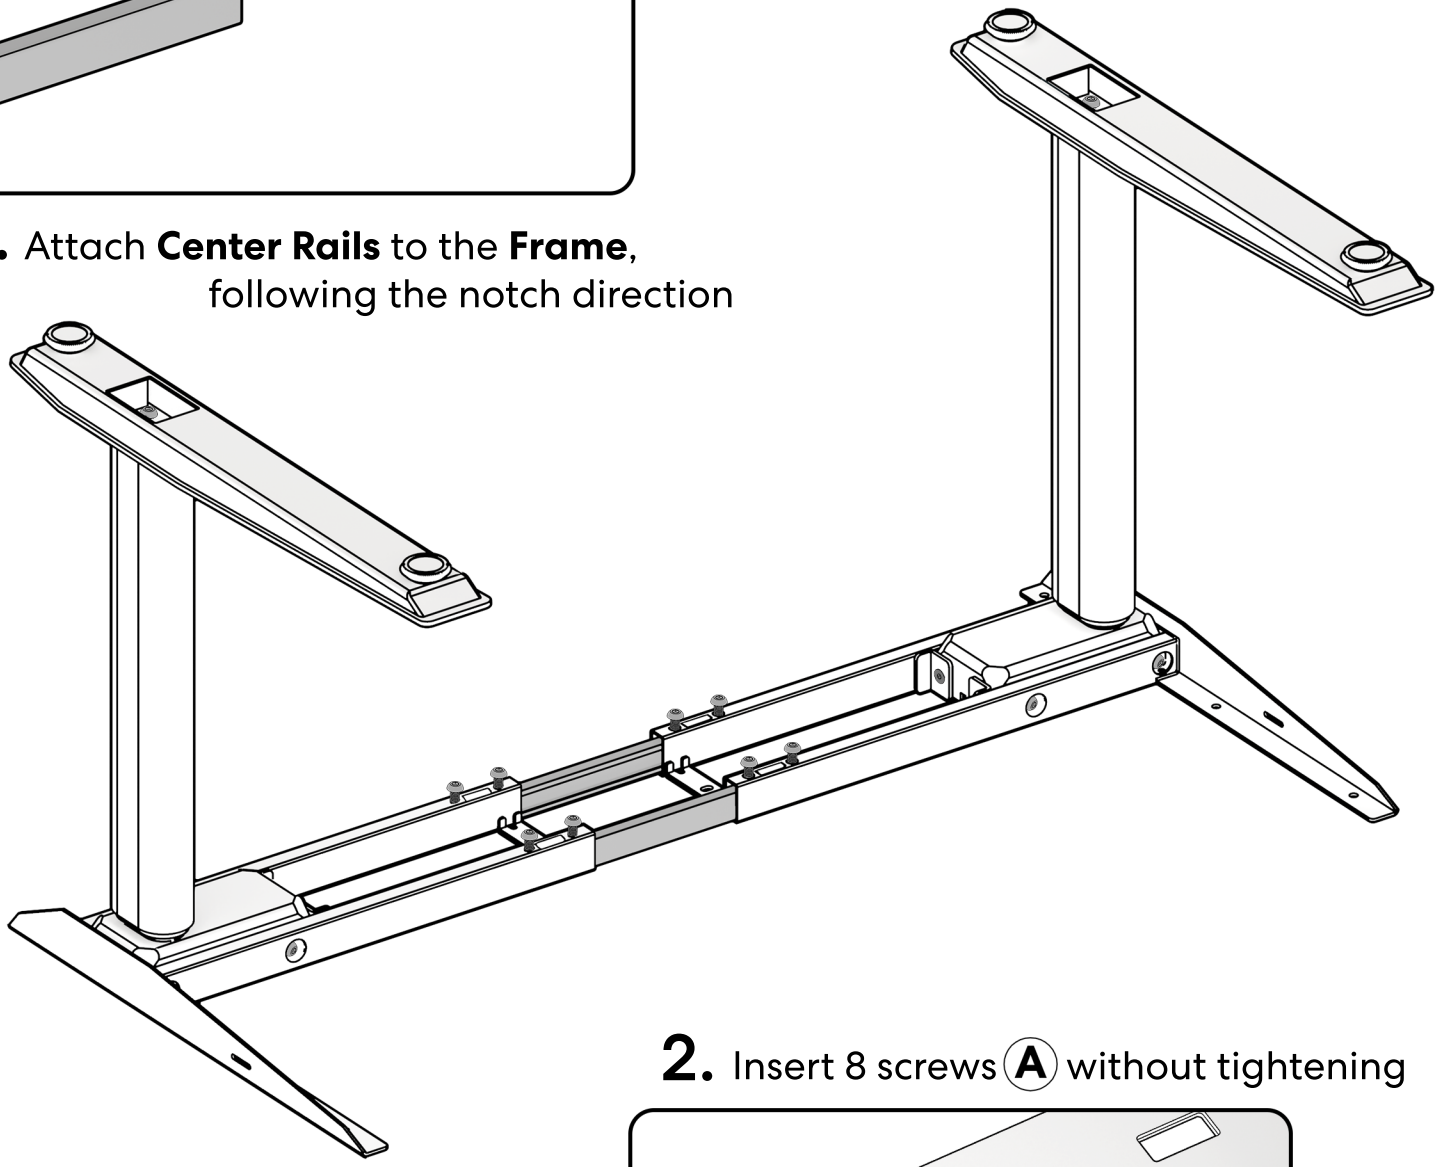

**2.** Insert 8 screws A without tightening

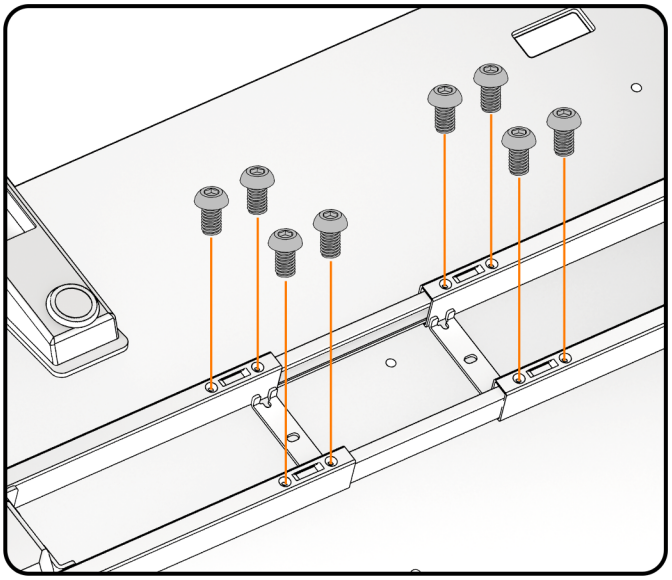

**1.** Place a **Foam Pad** under the **Desktop** to prevent scratches when installing







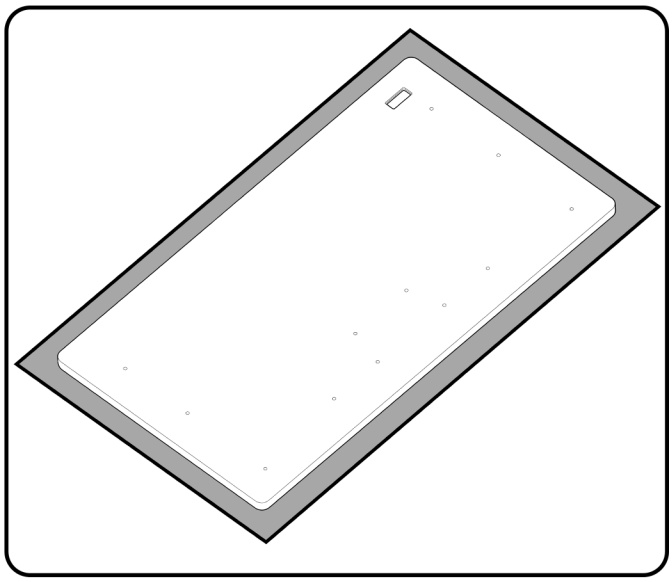

**2.**

With 2 people, position the **Frame** on the **Desktop**, align the **Side Bracket** holes with the **Desktop** holes

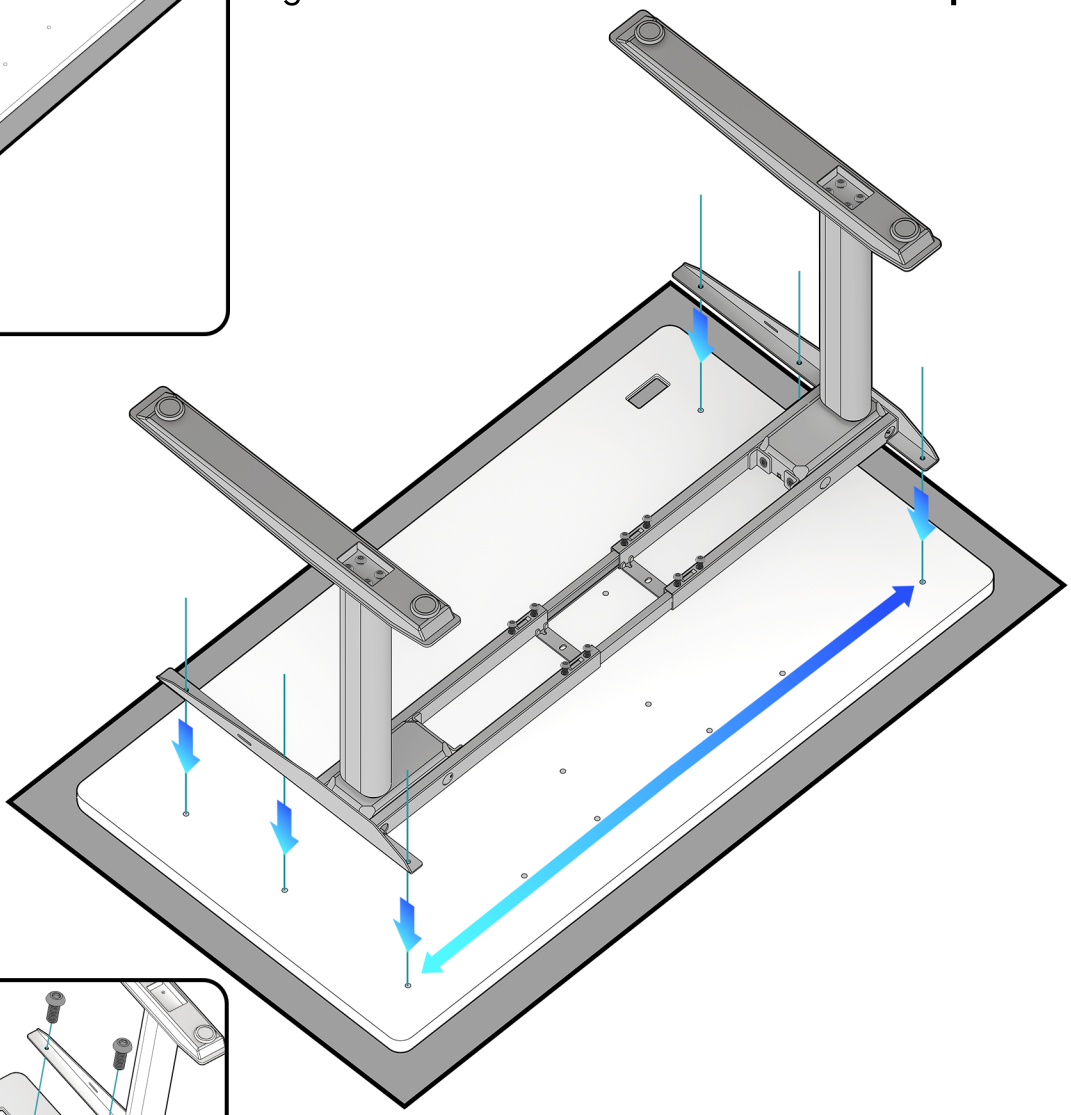

**3.** Insert 6 screws (B)

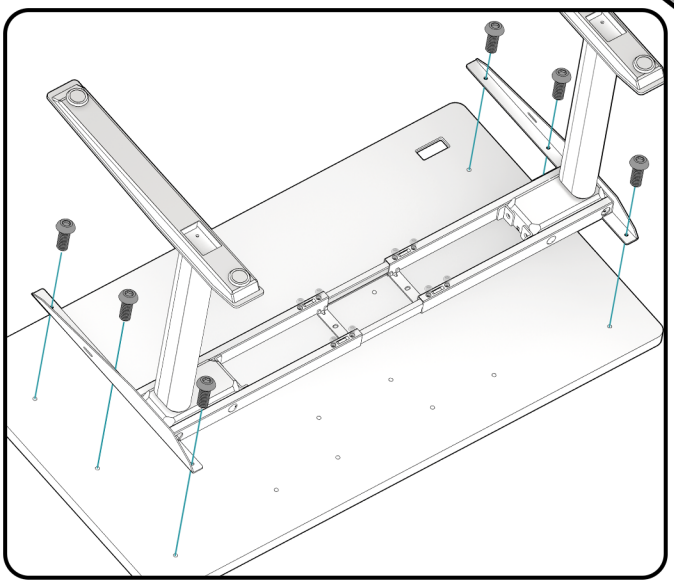

Ⓑ **M6x14** Screws



x2

Ⓓ **M4** Wrench

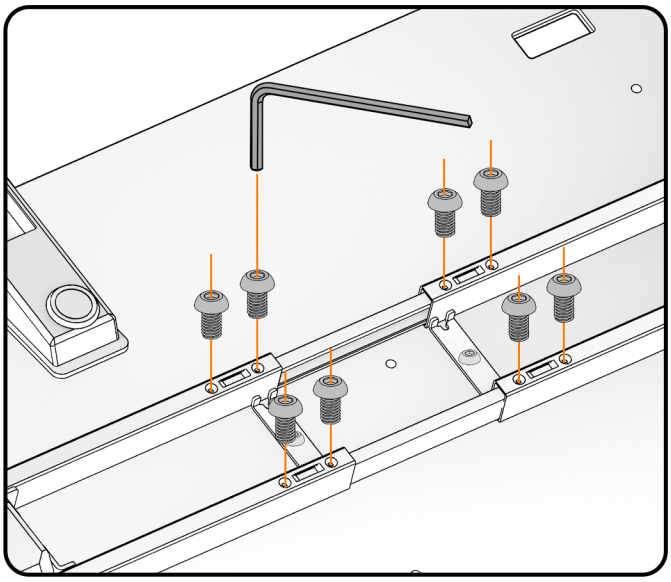

**1.** Insert 2 screws Ⓑ

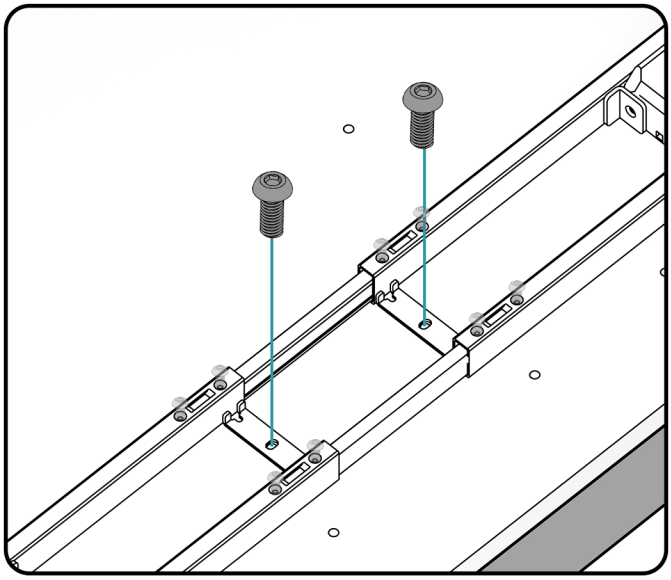

**2.** Tighten 8 screws Ⓐ

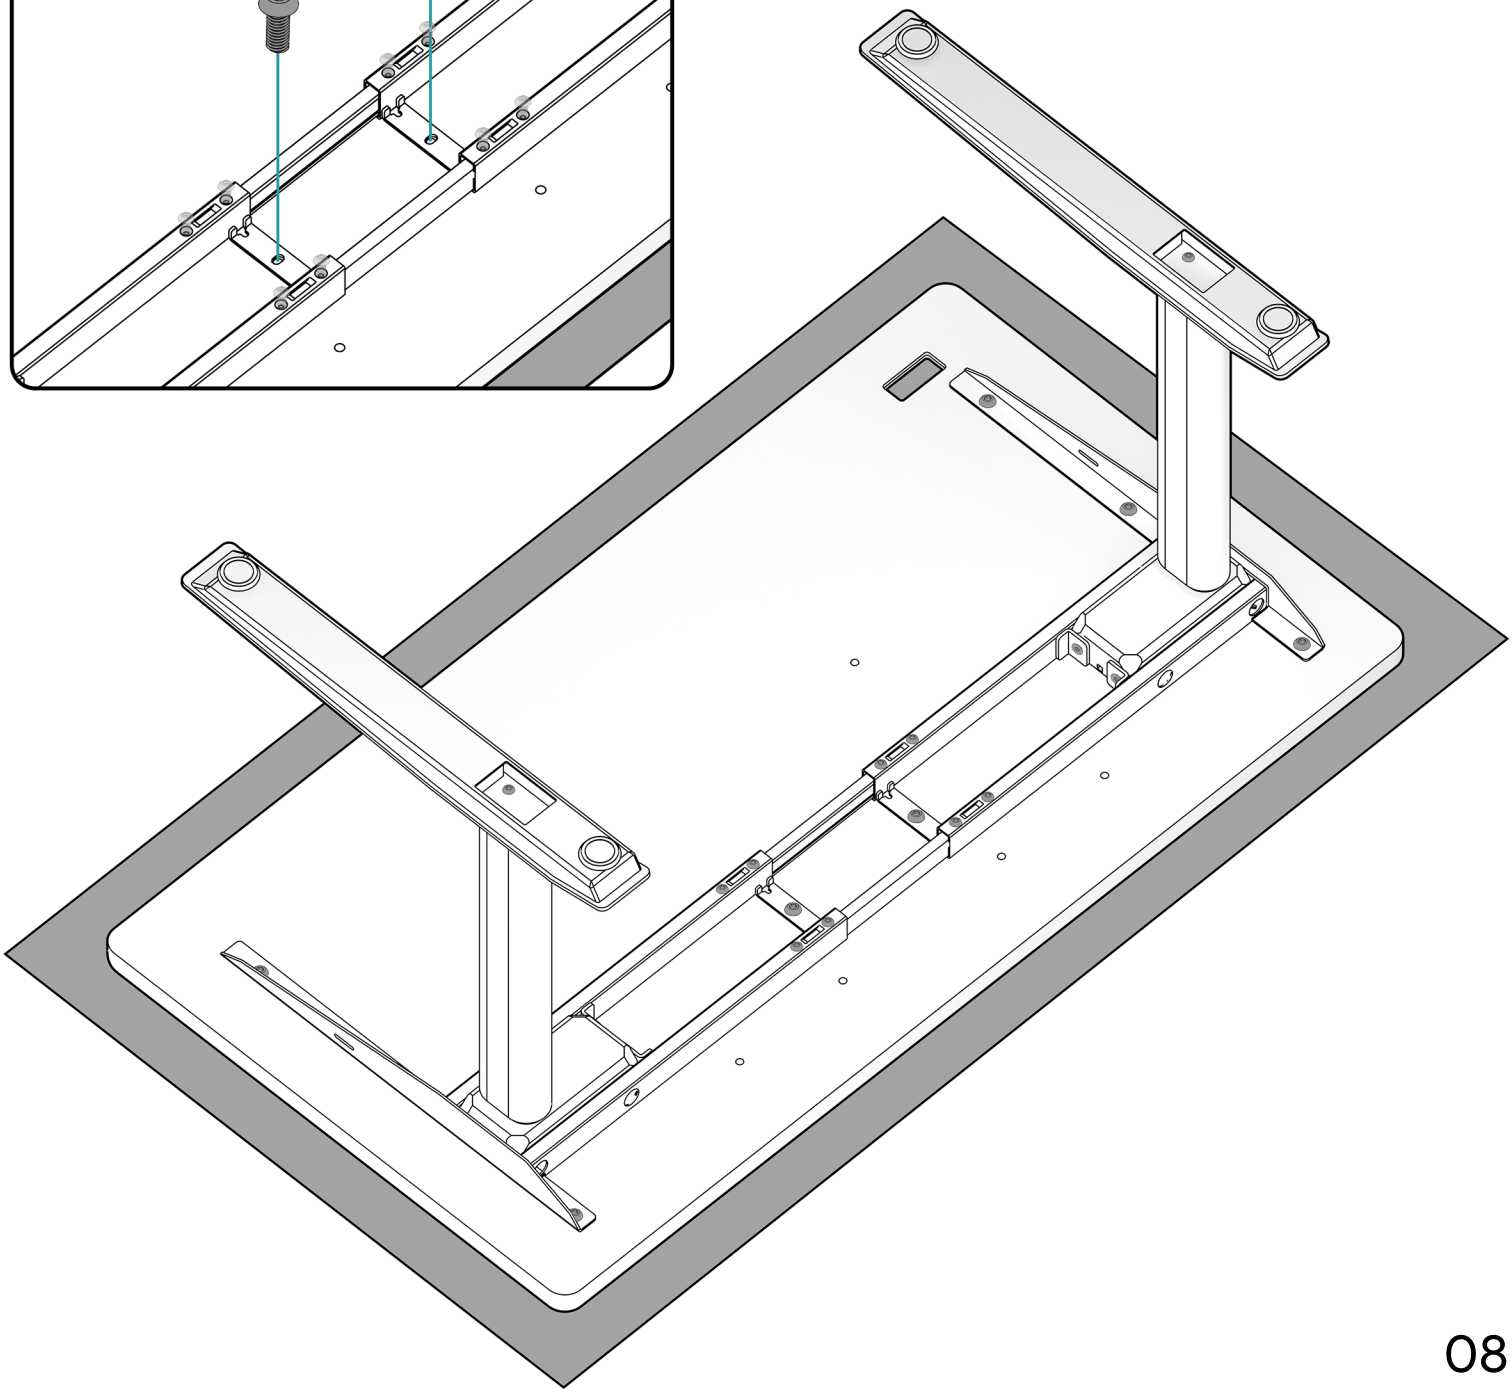

**B** **M6x14** Screws



x4

**D** **M4** Wrench

**E** **M6x14** Hand screws



x2

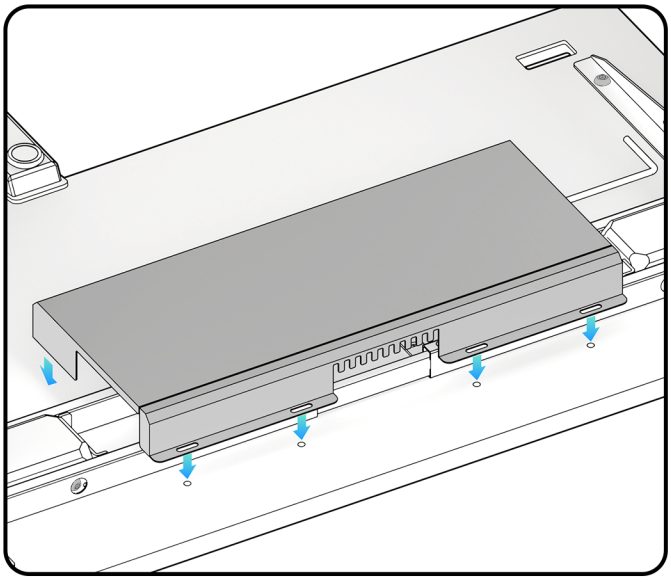

**1.** Assemble the **Cable Tray** to the **Desktop**

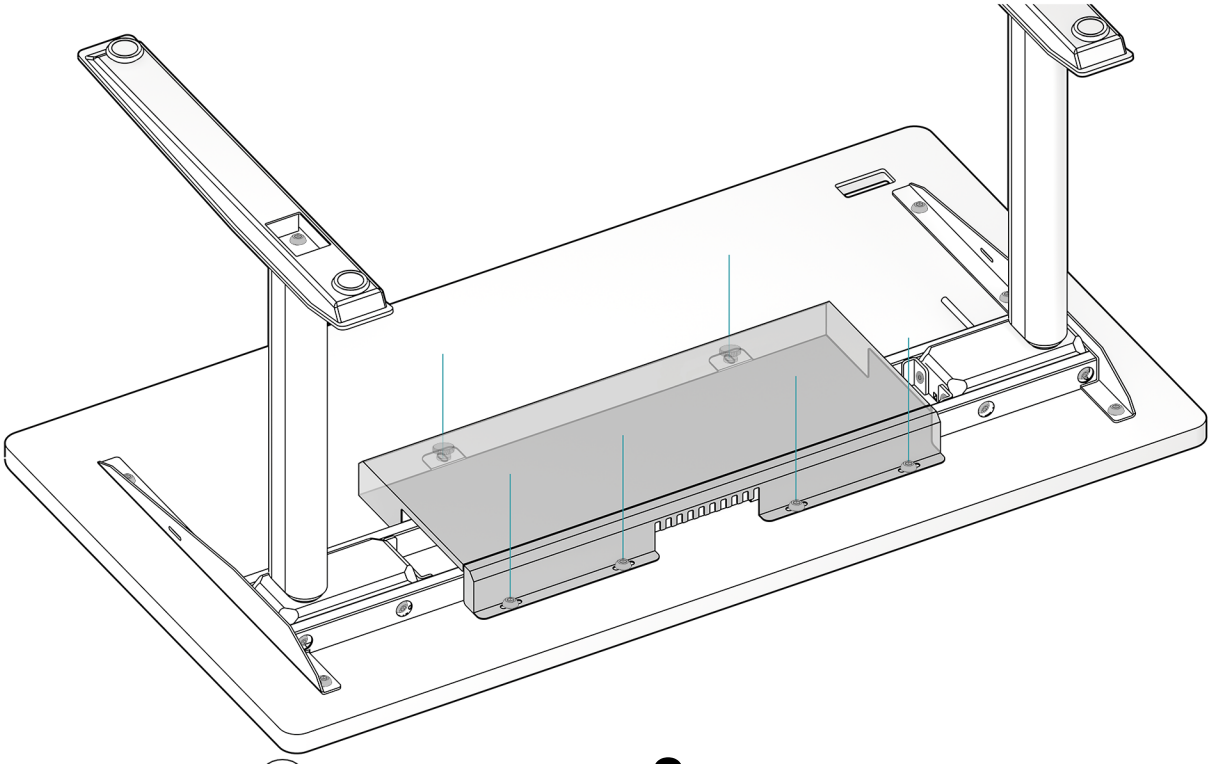

**2.** Insert 4 screws **B**

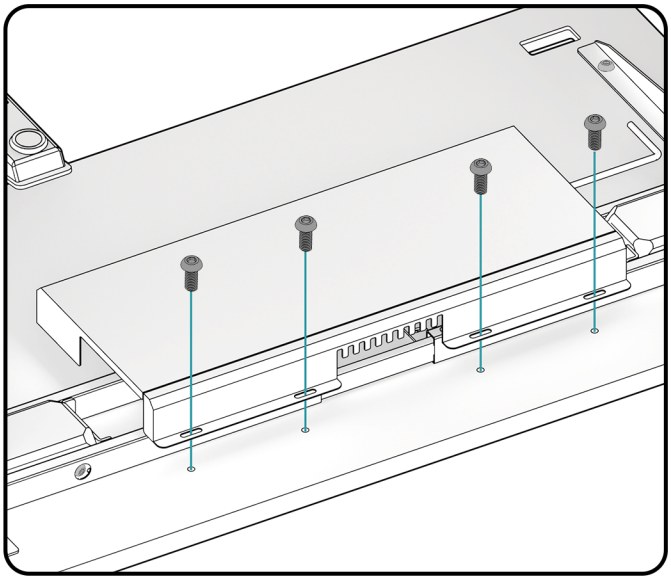

**3.** Insert 2 hand screws **E**

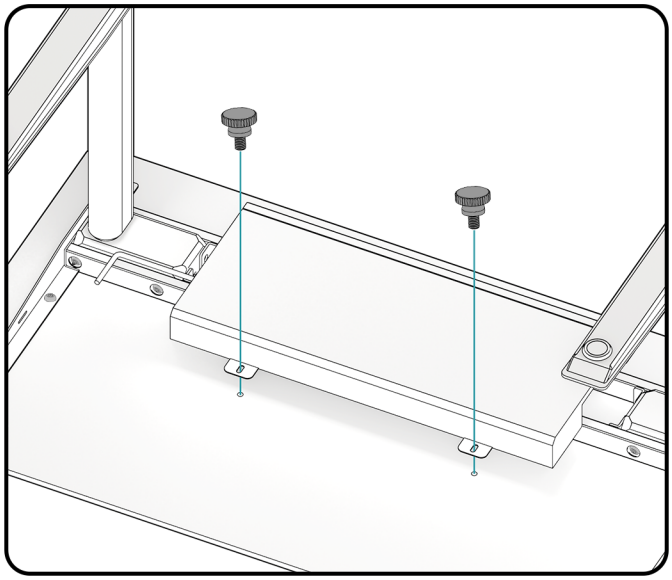

Note: Make sure all screws are tight, then flip upright. Keep the **Foam Pad** under the **Desktop** during flipping to prevent scratches.

1.

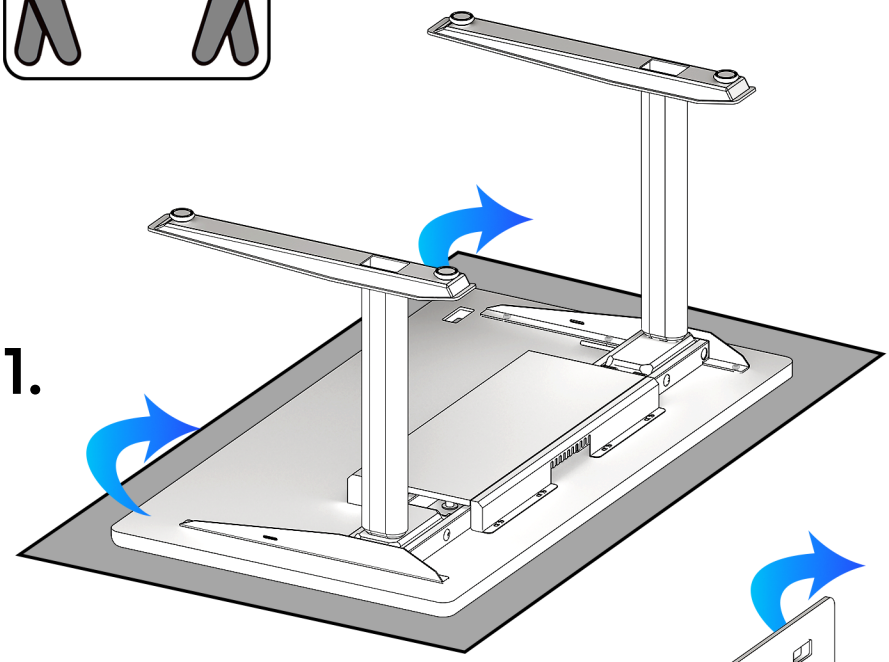

2.

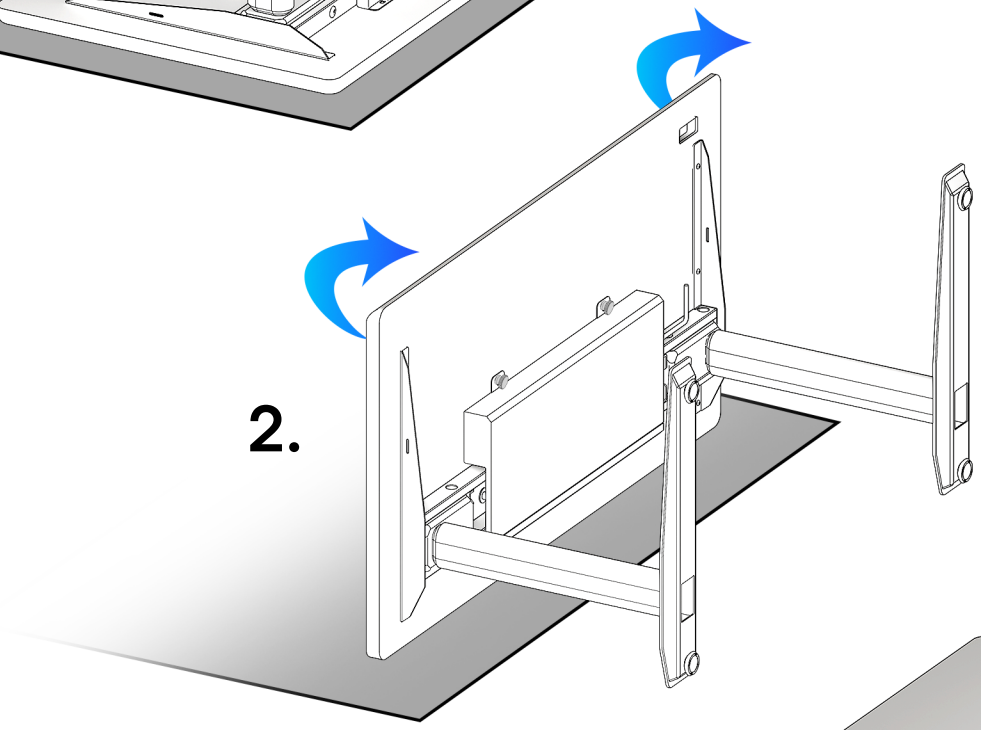

3.

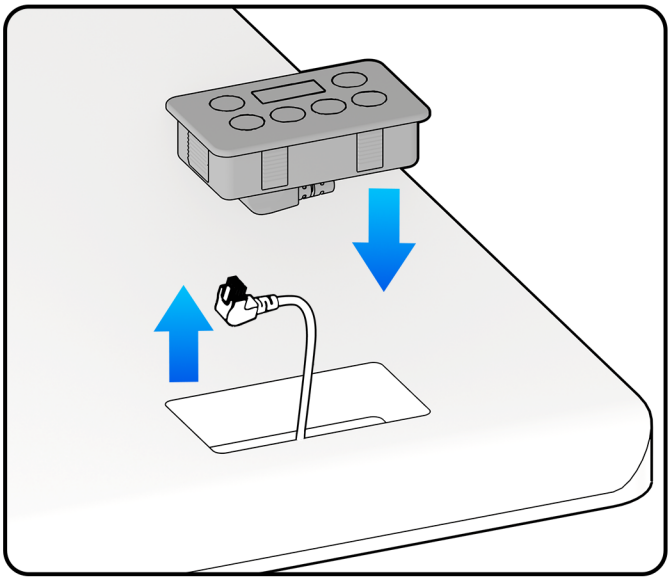

1. Route the **Keypad Cable** through the **Desktop**

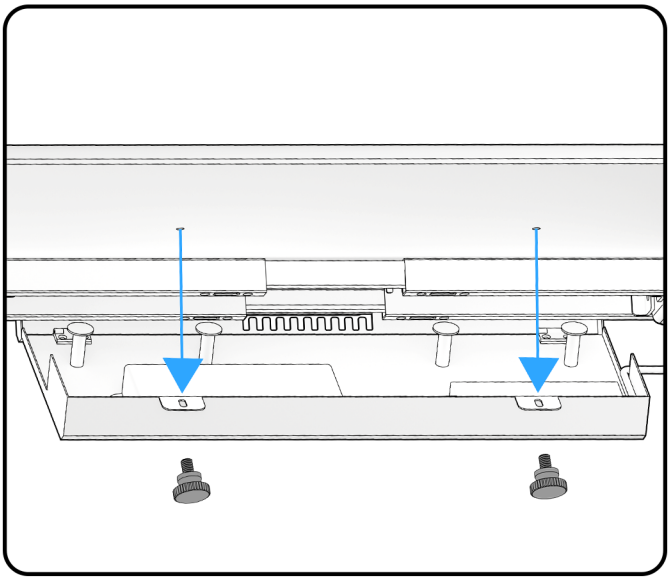

2. Turn 2 hand screws to release the **Cable Tray**

3. Plug **Motor & Keypad Cords** into the **Control Box** & secure them with the cable winders

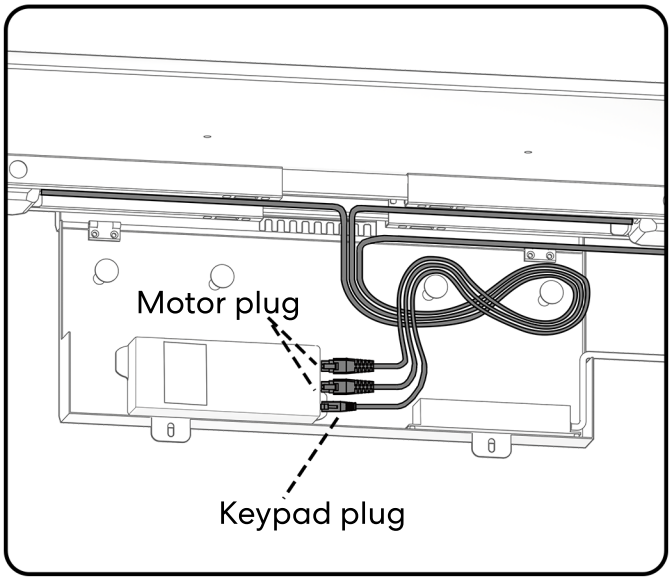


4. Plug the power cord into the **Outlet** & secure it with the winders

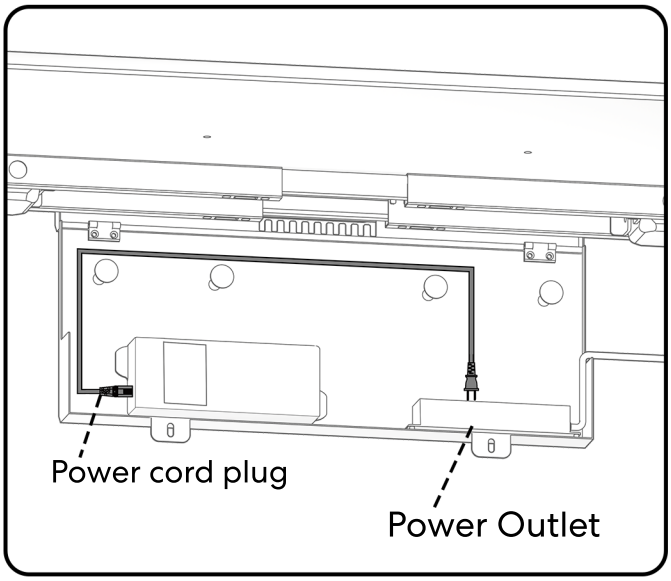

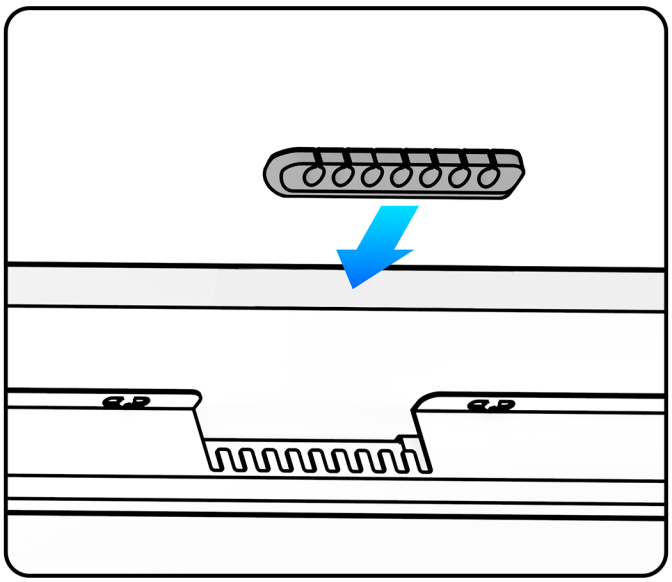

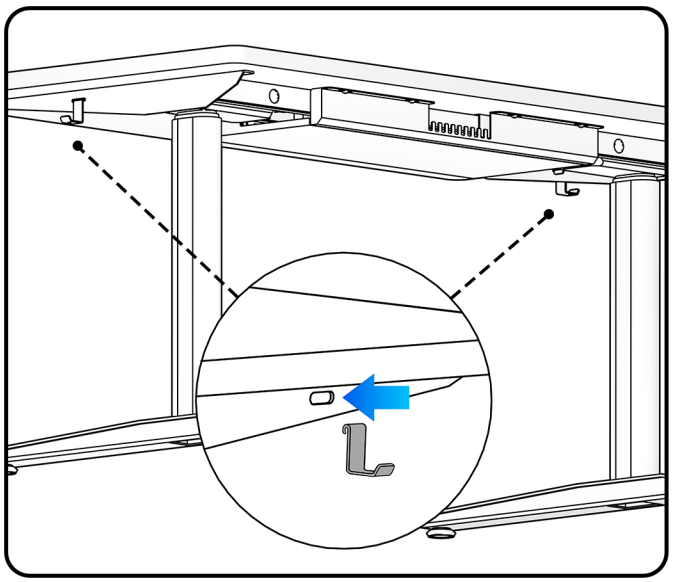

**1.** Attach the **Cable Organizer** to the **Desktop** & **Hooks** to the **Side Brackets**

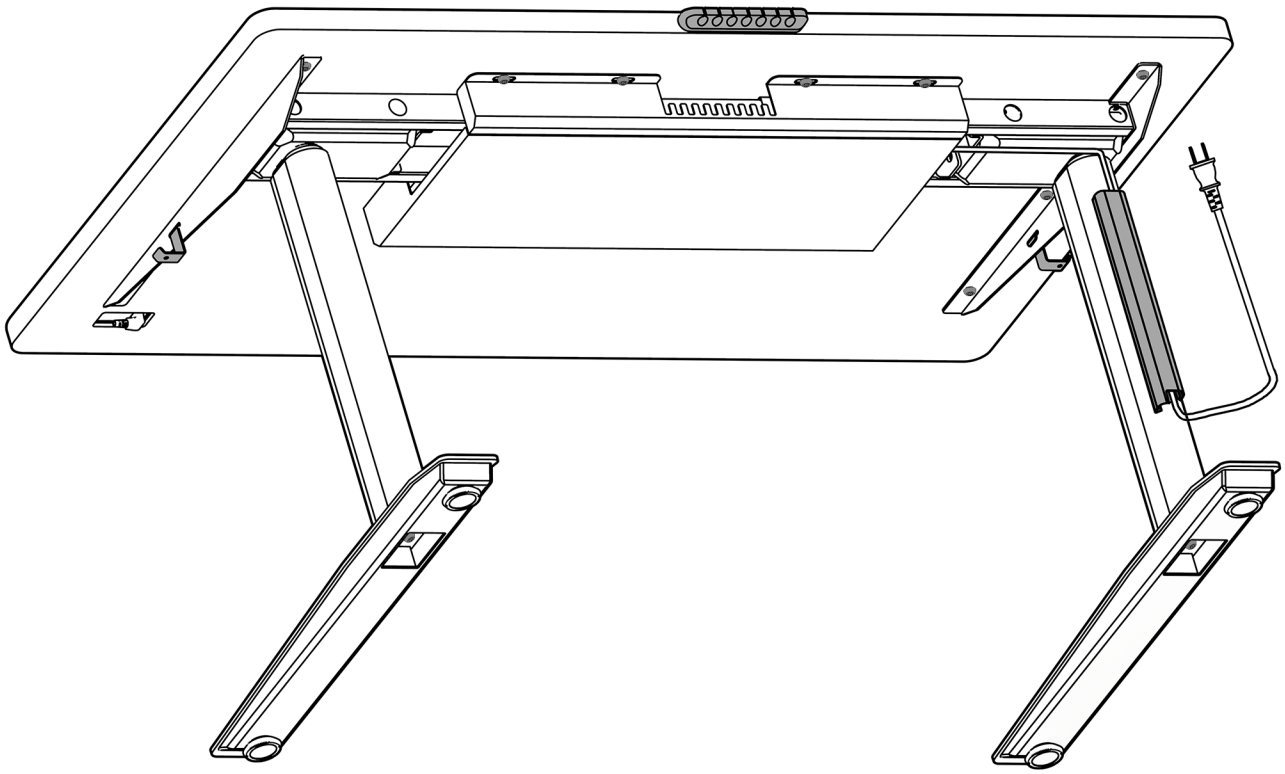

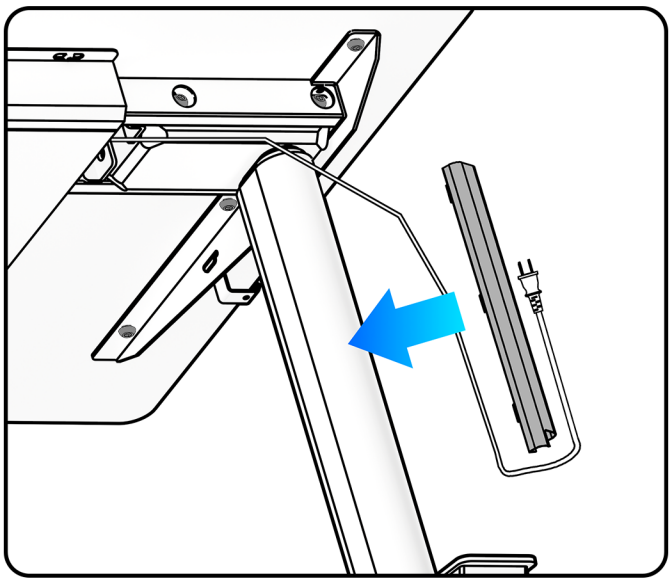

**2.** Attach the **Upper Tube** to a **Column**

*Note: The **Power Cord** should be put through the **Upper Tube** before attaching*

# SETUP KEYPAD

## RESET INSTRUCTION

**1.** Press & hold + for 3 seconds

**2.** Release when there is a "beep" sound to complete reset.

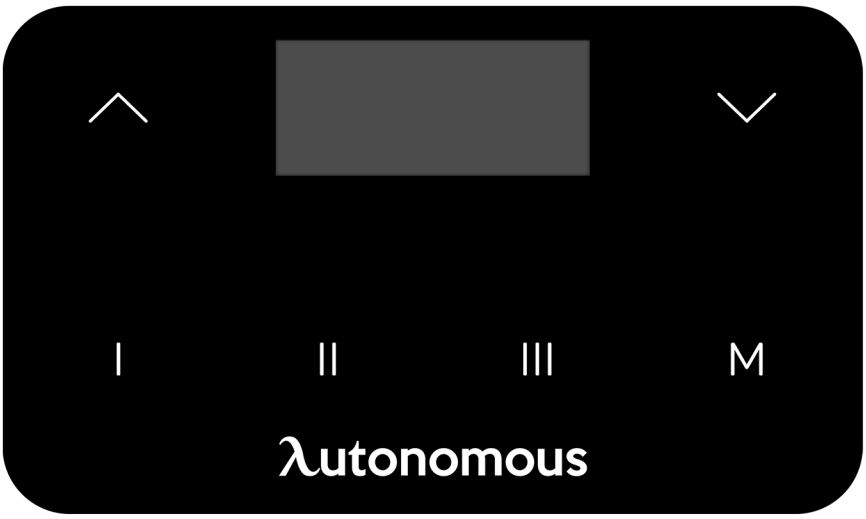

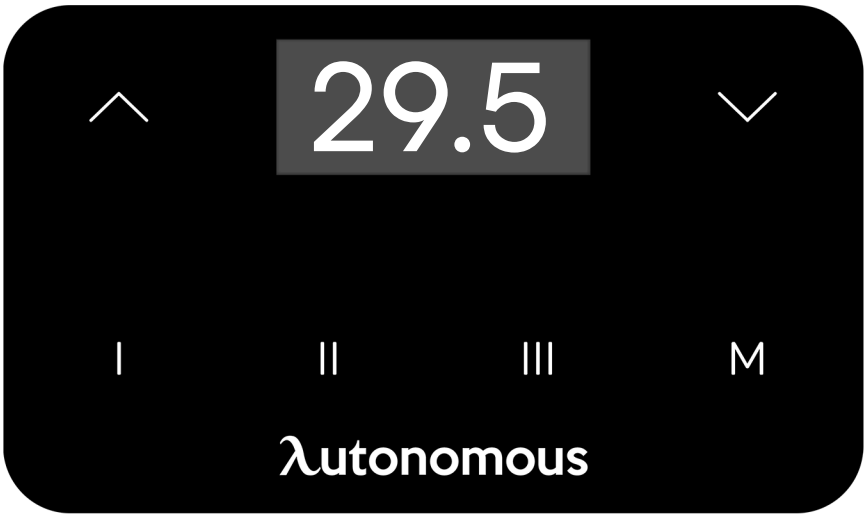


**1.** Press ^ or v to adjust the height

**2.** Press and hold M for 3 seconds until the display flashes, then press the memory I , II or III to save

**3.** Press I , II or III to move the desk to the saved height

# ANTI-COLLISION LEVEL SETTINGS

The Anti-collision setting prevents damage and accidents by stopping the desk if it hits something, becomes uneven, or tilts.

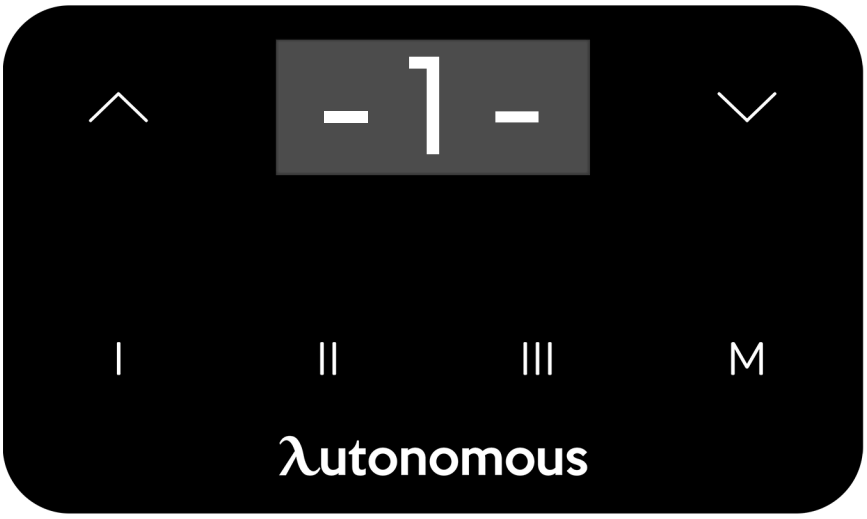


1. Press & hold I + II for 5 seconds to enter setting mode

2. Press ^ or v to adjust sensitivity. For the smoothest operation, we recommend setting the anti-collision back to level 1.

3. Wait for 5 seconds to save

Any questions?

Chat with our Customer Support team at
**www.autonomous.ai/help-center**

We're here to help!